



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>ABNORMAL</b>
FLUID CONDITION	<b>ABNORMAL</b>

Area  
**Store 9 - Marietta**  
Machine Id  
**JOHN DEERE 1058**

Component  
**Diesel Engine**  
Fluid  
**SHELL ROTELLA T 15W40 (--- QTS)**

## RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LEC0048280</b>	LEC0039927	LEC0039031
Sample Date		Client Info		<b>09 Mar 2024</b>	18 Apr 2023	07 Mar 2023
Machine Age	hrs	Client Info		<b>24371</b>	23176	22536
Oil Age	hrs	Client Info		<b>400</b>	400	400
Filter Age	hrs	Client Info		<b>400</b>	400	400
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>ABNORMAL</b>	SEVERE	SEVERE

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>33</b>	25	16
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	1	<1
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>3</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>4</b>	2	4
Lead	ppm	ASTM D5185m	>40	<b>19</b>	18	6
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	2	1
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION








Light fuel dilution occurring.

Silicon	ppm	ASTM D5185m	>120	<b>16</b>	8	5
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	2	0
Fuel	%	ASTM D3524	>5	<b>▲ 3.1</b>	▲ 13.4	▲ 10.4
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.6</b>	0.6	0.5
Nitration	Abs/cm	*ASTM D7624	>20	<b>10.6</b>	12.1	10.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>24.4</b>	24.3	24.2
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil.

Sodium	ppm	ASTM D5185m		<b>5</b>	0	0
Boron	ppm	ASTM D5185m	316	<b>138</b>	152	175
Barium	ppm	ASTM D5185m	0.0	<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185m	1.2	<b>107</b>	105	101
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	24	<b>710</b>	486	567
Calcium	ppm	ASTM D5185m	2292	<b>1668</b>	1237	1304
Phosphorus	ppm	ASTM D5185m	1064	<b>744</b>	541	594
Zinc	ppm	ASTM D5185m	1160	<b>885</b>	680	724
Sulfur	ppm	ASTM D5185m	4996	<b>3039</b>	1829	2420
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>21.0</b>	26.6	21.3
Base Number (BN)	mg KOH/g	ASTM D2896	10.1	<b>6.6</b>	5.2	7.3
Visc @ 100°C	cSt	ASTM D445	15.7	<b>▲ 12.4</b>	▲ 10.7	▲ 11.0

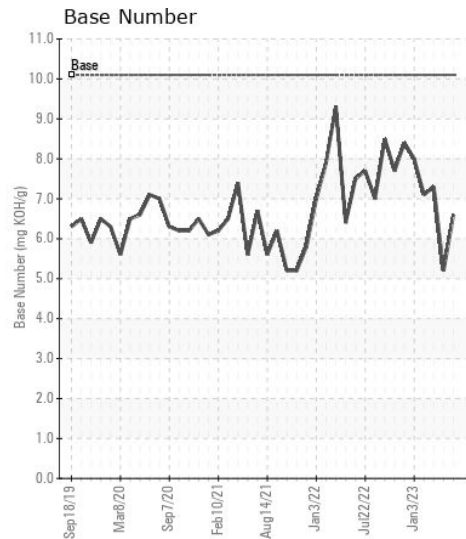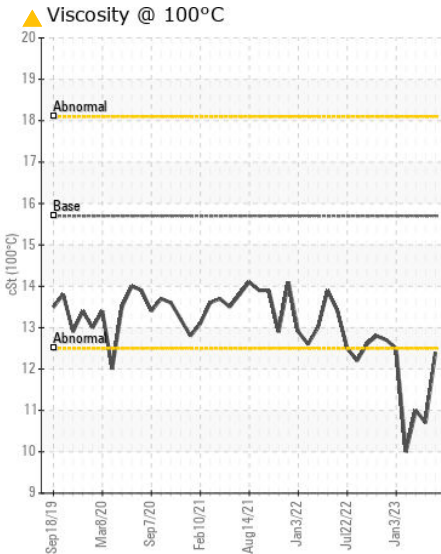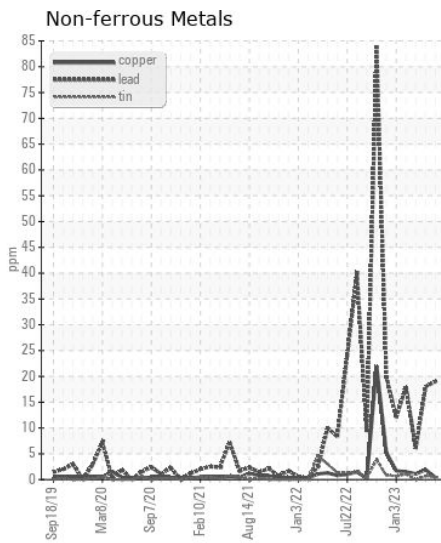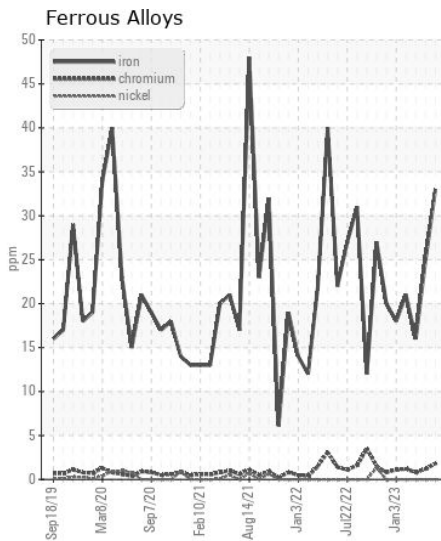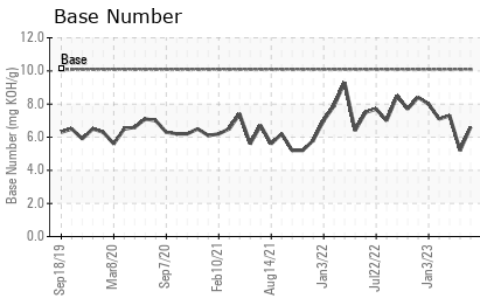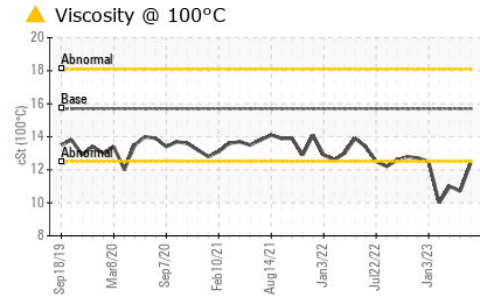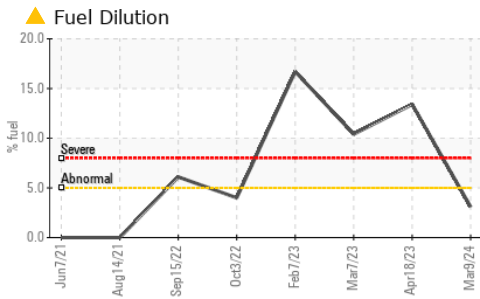

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : LEC0048280 **Received** : 20 Mar 2024  
**Lab Number** : 06123336 **Tested** : 22 Mar 2024  
**Unique Number** : 10937487 **Diagnosed** : 22 Mar 2024 - Sean Felton  
**Test Package** : CONST ( Additional Tests: PercentFuel, TBN )

**HALL DRILLING LLC**  
 PO BOX 249  
 ELLENBORO, WV  
 US 26346

Contact: CHRIS PETROVICH  
 chrispetrovich@halldrilling.com  
 T: (304)869-3404  
 F: (304)869-3408

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)