



# VOLVO

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**[A12267]**  
Machine Id  
**VOLVO L110H 632441**  
Component  
**Diesel Engine**  
Fluid  
**MOBIL 15W40 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>VCP444364</b>	VCP439450	VCP412601
Sample Date		Client Info		<b>05 Mar 2024</b>	21 Dec 2023	02 Oct 2023
Machine Age	hrs	Client Info		<b>3590</b>	0	2450
Oil Age	hrs	Client Info		<b>500</b>	500	500
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>11</b>	11	13
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>1</b>	<1	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>10	<b>5</b>	4	1
Lead	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185m	>15	<b>1</b>	1	2
Tin	ppm	ASTM D5185m	>10	<b>1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	<b>5</b>	4	4
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	<1	2
Fuel		WC Method	>6.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.2</b>	0.2	0.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.5</b>	6.9	7.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>18.2</b>	18.4	18.5
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>118	<b>2</b>	1	0
Boron	ppm	ASTM D5185m		<b>5</b>	7	6
Barium	ppm	ASTM D5185m		<b>0</b>	0	1
Molybdenum	ppm	ASTM D5185m		<b>9</b>	15	29
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>98</b>	216	332
Calcium	ppm	ASTM D5185m		<b>2272</b>	2036	1790
Phosphorus	ppm	ASTM D5185m		<b>932</b>	943	900
Zinc	ppm	ASTM D5185m		<b>1108</b>	1125	1096
Sulfur	ppm	ASTM D5185m		<b>3909</b>	3499	3653
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>11.0</b>	11.6	12.4
Base Number (BN)	mg KOH/g	ASTM D2896		<b>6.5</b>	6.5	7.1
Visc @ 100°C	cSt	ASTM D445		<b>13.3</b>	13.1	13.5

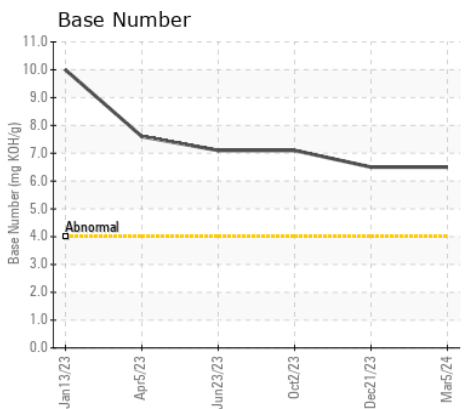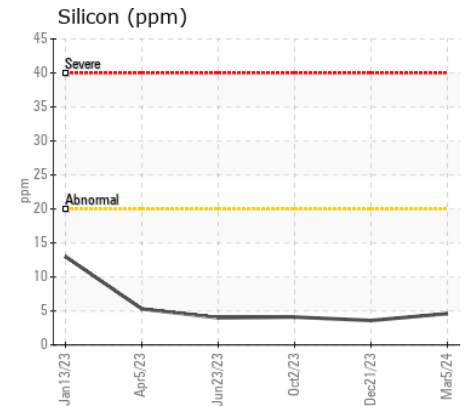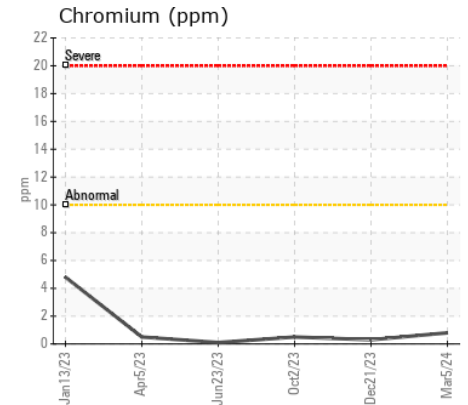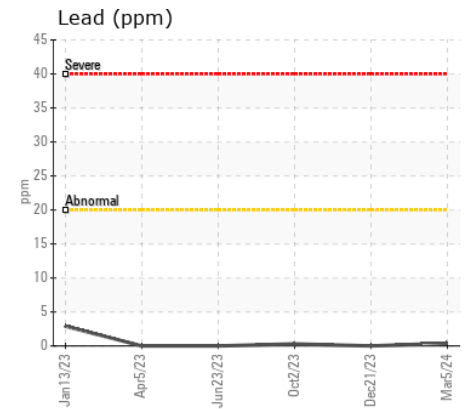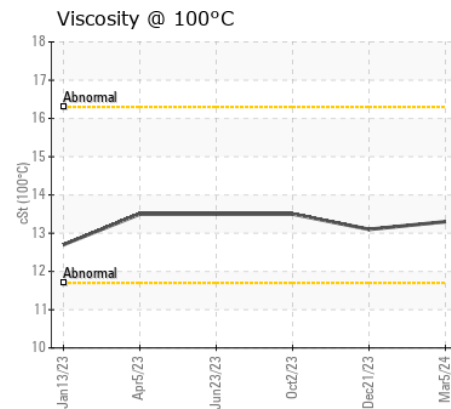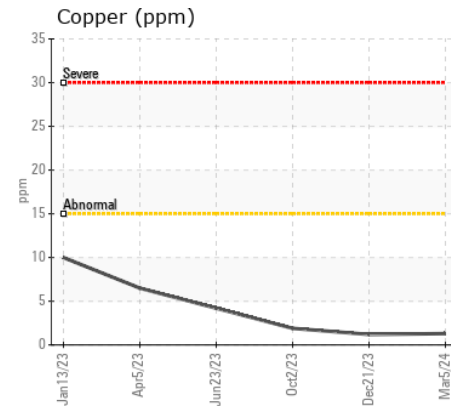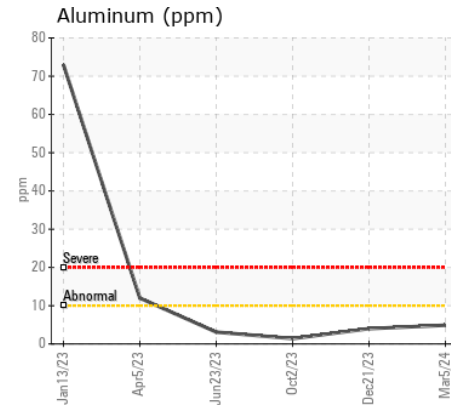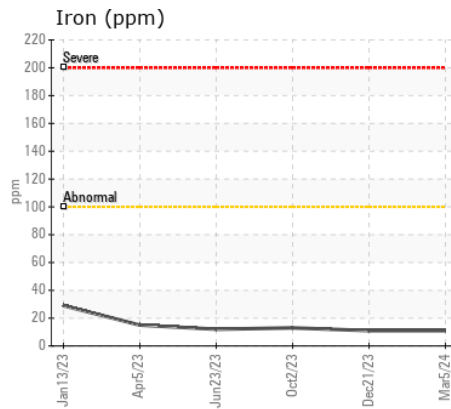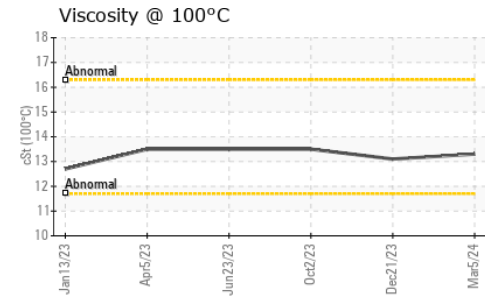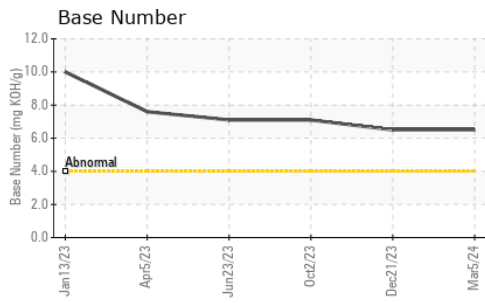

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : VCP444364

Lab Number : 06123425

Unique Number : 10937576

Test Package : MOB 1 ( Additional Tests: TBN )

Received : 20 Mar 2024

Tested : 21 Mar 2024

Diagnosed : 21 Mar 2024 - Wes Davis

HMR ASSOCIATES

PO BOX 485

TOUGHKENAMON, PA

US 19374

Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: (610)268-2225