



# VOLVO

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**[A12304]**  
Machine Id  
**VOLVO L120H 633139**  
Component  
**Diesel Engine**  
Fluid  
**MOBIL 15W40 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>VCP446021</b>	VCP440440	VCP434156
Sample Date		Client Info		<b>18 Mar 2024</b>	14 Feb 2024	06 Dec 2023
Machine Age	hrs	Client Info		<b>4650</b>	4430	3950
Oil Age	hrs	Client Info		<b>250</b>	250	250
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	<b>4</b>	4	5
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m	>5	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>20</b>	<1	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	<1	<1
Aluminum	ppm	ASTM D5185m	>30	<b>3</b>	2	2
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	<b>4</b>	3	3
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	3	2
Fuel		WC Method	>6.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.1</b>	0.1	0.2
Nitration	Abs/cm	*ASTM D7624	>20	<b>6.4</b>	6.2	6.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>16.4</b>	15.9	16.4
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>118	<b>2</b>	0	<1
Boron	ppm	ASTM D5185m		<b>36</b>	7	8
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>7</b>	7	11
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m		<b>153</b>	71	159
Calcium	ppm	ASTM D5185m		<b>2081</b>	1886	1976
Phosphorus	ppm	ASTM D5185m		<b>938</b>	834	808
Zinc	ppm	ASTM D5185m		<b>1091</b>	899	1030
Sulfur	ppm	ASTM D5185m		<b>4061</b>	3342	3263
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>10.3</b>	9.2	9.6
Base Number (BN)	mg KOH/g	ASTM D2896		<b>7.5</b>	7.2	6.9
Visc @ 100°C	cSt	ASTM D445		<b>13.4</b>	13.3	13.1

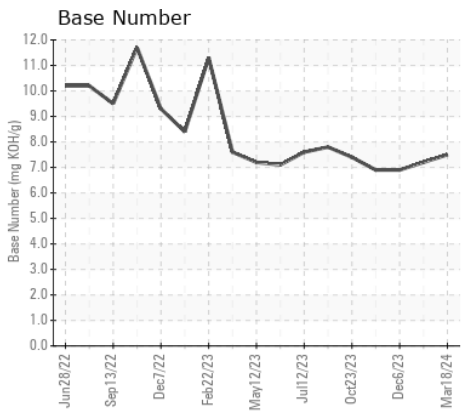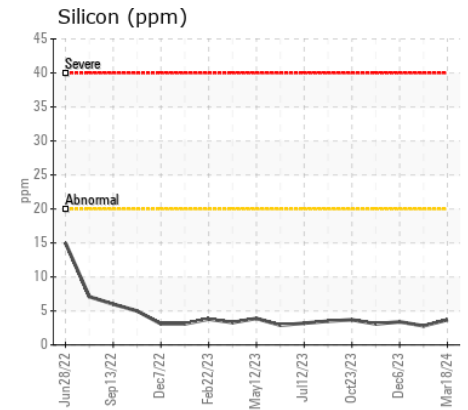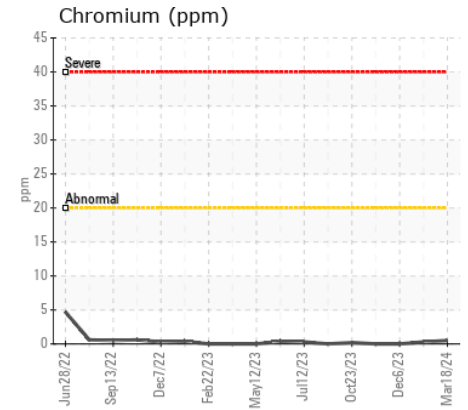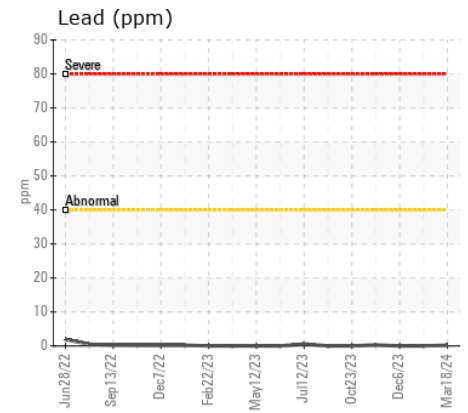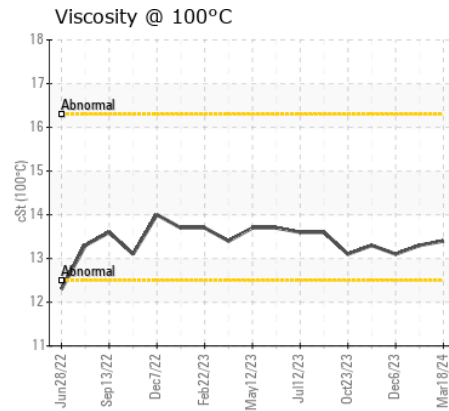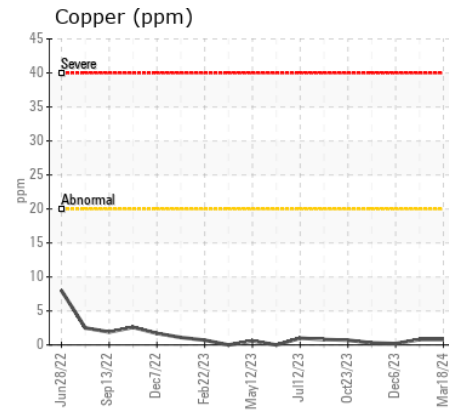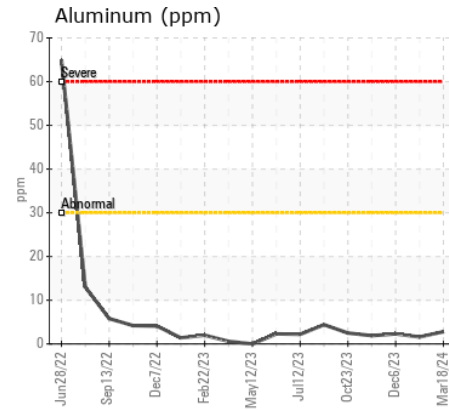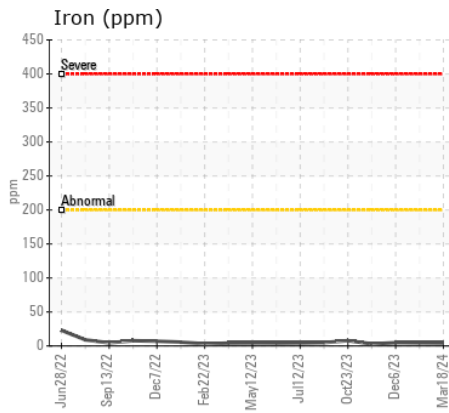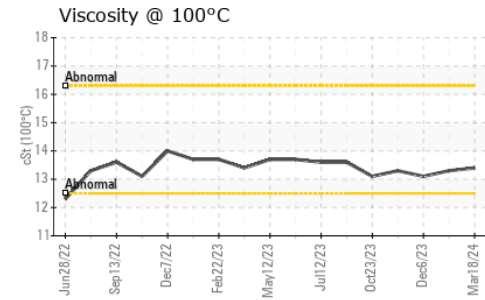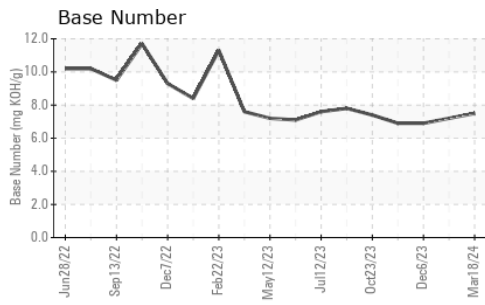

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP446021 **Received** : 20 Mar 2024  
**Lab Number** : 06123431 **Tested** : 21 Mar 2024  
**Unique Number** : 10937582 **Diagnosed** : 21 Mar 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**GOURMETS DELIGHT**  
 PO BOX 160  
 AVONDALE, PA  
 US 19311

Contact: GABE VALENTINO  
 gabe.valentino@gourmetsfinest.com

T: (610)268-3578  
 F: (610)268-2298