



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
5023
Component
Diesel Engine
Fluid
SHELL ROTELLA T 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0210472	JR0169266	JR0159371
Sample Date		Client Info		14 Mar 2024	10 May 2023	06 Mar 2023
Machine Age	hrs	Client Info		12801	12145	11734
Oil Age	hrs	Client Info		3000	500	0
Filter Age	hrs	Client Info		3000	500	0
Oil Changed		Client Info		Changed	Changed	N/A
Filter Changed		Client Info		Changed	Changed	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	24	21	28
Chromium	ppm	ASTM D5185m	>20	2	<1	1
Nickel	ppm	ASTM D5185m	>2	<1	<1	0
Titanium	ppm	ASTM D5185m	>2	<1	0	<1
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>25	9	7	12
Lead	ppm	ASTM D5185m	>40	<1	0	<1
Copper	ppm	ASTM D5185m	>330	3	6	24
Tin	ppm	ASTM D5185m	>15	<1	<1	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	8	5	5
Potassium	ppm	ASTM D5185m	>20	27	36	100
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	0.0
Soot %	%	*ASTM D7844	>3	0.7	0.8	1.5
Nitration	Abs/cm	*ASTM D7624	>20	8.6	8.9	9.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.1	22.9	24.0
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		6	6	17
Boron	ppm	ASTM D5185m	316	1	1	2
Barium	ppm	ASTM D5185m	0.0	0	0	0
Molybdenum	ppm	ASTM D5185m	1.2	7	6	14
Manganese	ppm	ASTM D5185m		<1	<1	1
Magnesium	ppm	ASTM D5185m	24	46	40	50
Calcium	ppm	ASTM D5185m	2292	2376	2517	2353
Phosphorus	ppm	ASTM D5185m	1064	892	922	836
Zinc	ppm	ASTM D5185m	1160	1102	1192	1127
Sulfur	ppm	ASTM D5185m	4996	3881	4420	3666
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.2	14.2	14.0
Base Number (BN)	mg KOH/g	ASTM D2896	10.1	5.7	5.9	6.7
Visc @ 100°C	cSt	ASTM D445	15.7	14.0	14.0	14.0

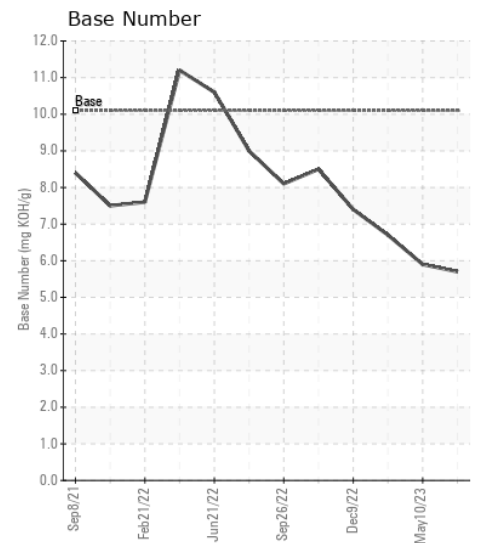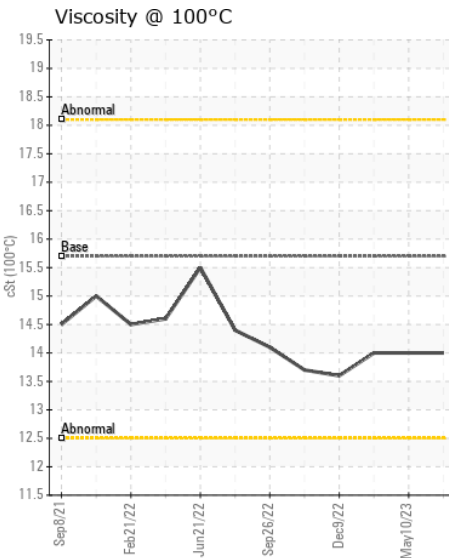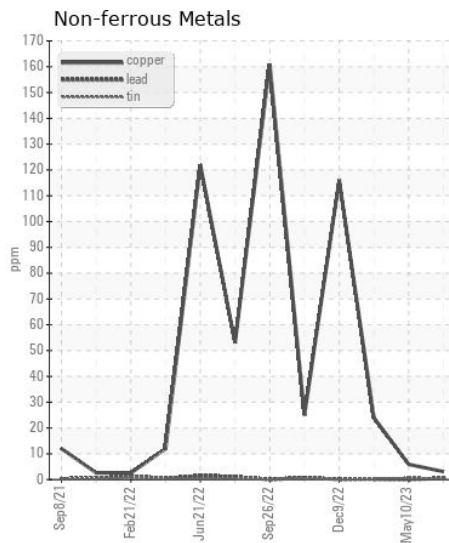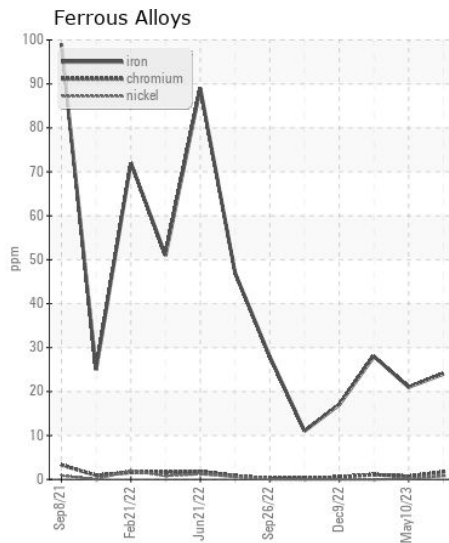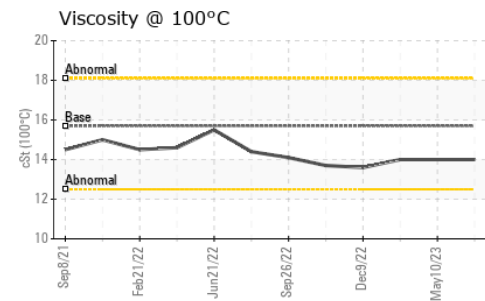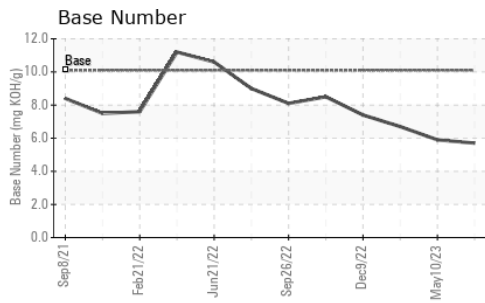

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0210472 **Received** : 20 Mar 2024
Lab Number : 06123486 **Tested** : 21 Mar 2024
Unique Number : 10937637 **Diagnosed** : 21 Mar 2024 - Wes Davis
Test Package : CONST (Additional Tests: TBN)

PATRIOT DEVELOPMENT CORP
 22721 LADBROOK DRIVE STE 120
 STERLING, VA
 US 20166
 Contact: ROBERT MOSS
 robert.moss@patriotdev.net

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: