



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION



Area
[W27227]
Machine Id
6040
Component
Diesel Engine
Fluid
SHELL ROTELLA T 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0169432	JR0184271	JR0169722
Sample Date		Client Info		19 Mar 2024	02 Oct 2023	19 Jul 2023
Machine Age	hrs	Client Info		0	3927	1000
Oil Age	hrs	Client Info		0	500	1000
Filter Age	hrs	Client Info		0	500	1000
Oil Changed		Client Info		N/A	Changed	Changed
Filter Changed		Client Info		N/A	Changed	Changed
Sample Status				ATTENTION	ATTENTION	ATTENTION

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	13	14	34
Chromium	ppm	ASTM D5185m	>20	<1	<1	1
Nickel	ppm	ASTM D5185m	>2	<1	0	0
Titanium	ppm	ASTM D5185m	>2	<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>25	5	3	8
Lead	ppm	ASTM D5185m	>40	<1	0	0
Copper	ppm	ASTM D5185m	>330	3	2	5
Tin	ppm	ASTM D5185m	>15	<1	0	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








Fuel content negligible. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	6	8	9
Potassium	ppm	ASTM D5185m	>20	2	0	2
Fuel	%	ASTM D3524	>5	0.3	<1.0	0.3
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.1	0.2	0.3
Nitration	Abs/cm	*ASTM D7624	>20	8.3	8.1	9.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.9	19.5	22.1
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

Sodium	ppm	ASTM D5185m		1	1	1
Boron	ppm	ASTM D5185m	316	2	1	6
Barium	ppm	ASTM D5185m	0.0	0	0	0
Molybdenum	ppm	ASTM D5185m	1.2	3	<1	4
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	24	47	41	36
Calcium	ppm	ASTM D5185m	2292	2486	2378	2395
Phosphorus	ppm	ASTM D5185m	1064	975	912	933
Zinc	ppm	ASTM D5185m	1160	1144	1134	1135
Sulfur	ppm	ASTM D5185m	4996	4340	3729	3935
Oxidation	Abs/.1mm	*ASTM D7414	>25	11.9	12.1	14.6
Base Number (BN)	mg KOH/g	ASTM D2896	10.1	6.2	6.3	6.2
Visc @ 100°C	cSt	ASTM D445	15.7	11.9	12.3	11.7

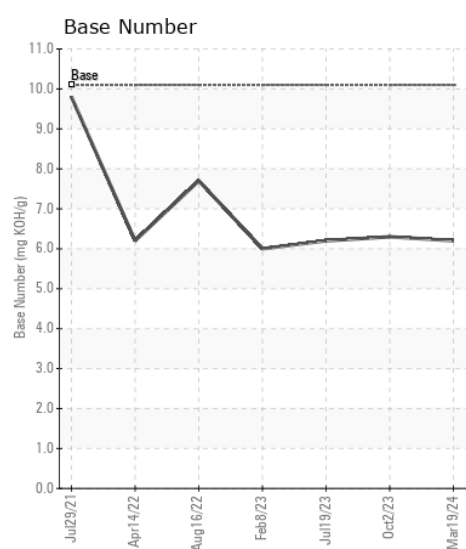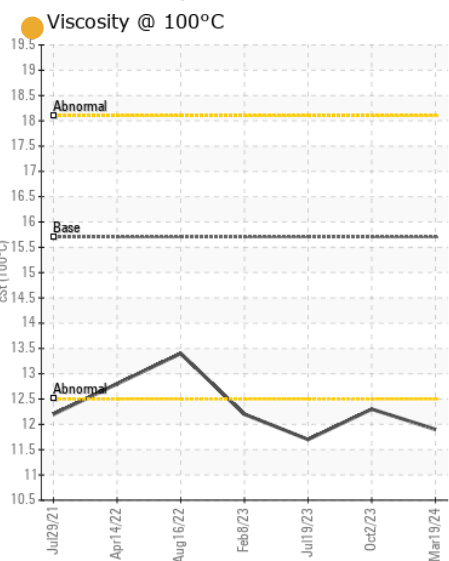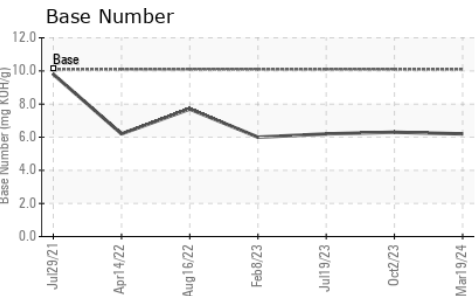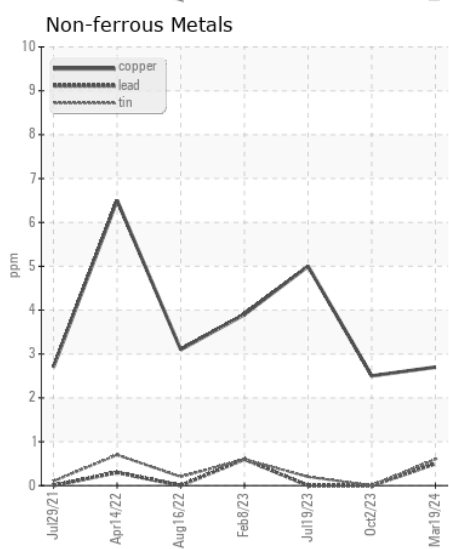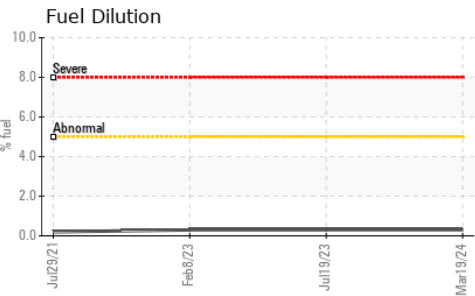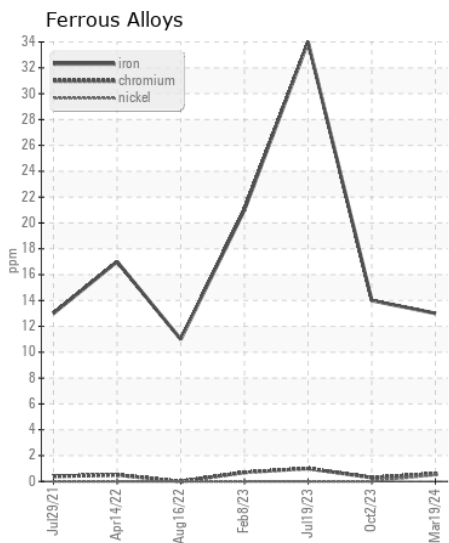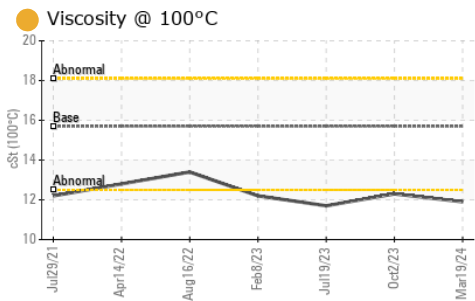

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0169432 **Received** : 20 Mar 2024
Lab Number : 06123495 **Tested** : 22 Mar 2024
Unique Number : 10937646 **Diagnosed** : 22 Mar 2024 - Don Baldrige
Test Package : CONST (Additional Tests: FuelDilution, PercentFuel, TBN)

PATRIOT DEVELOPMENT CORP
 22721 LADBROOK DRIVE STE 120
 STERLING, VA
 US 20166
 Contact: ROBERT MOSS
 robert.moss@patriotdev.net

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: