



WEAR	<b>ABNORMAL</b>
CONTAMINATION	<b>ABNORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**[W27678]**  
 Machine Id  
**JOHN DEERE 1T0330GKJNF423449**  
 Component  
**Hydraulic System**  
 Fluid  
**JOHN DEERE HYDRAU (--- QTS)**

### RECOMMENDATION

Oil and filter change at the time of sampling has been noted. We advise that you inspect for the source(s) of wear. We recommend an early resample to monitor this condition. We were unable to perform a particle count due to a high concentration of particles present in this sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0210501</b>	---	---
Sample Date		Client Info		<b>18 Mar 2024</b>	---	---
Machine Age	hrs	Client Info		<b>555</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>Changed</b>	---	---
Sample Status				<b>ABNORMAL</b>	---	---

### WEAR

The iron level is abnormal. Moderate concentration of visible metal present.

PQ		ASTM D8184		<b>21</b>	---	---
Iron	ppm	ASTM D5185m	>20	<b>▲ 21</b>	---	---
Chromium	ppm	ASTM D5185m	>10	<b>2</b>	---	---
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>10	<b>2</b>	---	---
Lead	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185m	>75	<b>7</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
White Metal	scalar	*Visual	NONE	<b>▲ MODER</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

### CONTAMINATION









Moderate concentration of visible dirt/debris present in the oil. There is a light concentration of water present in the oil.

Silicon	ppm	ASTM D5185m	>20	<b>4</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	---	---
Water	%	ASTM D6304	>0.1	<b>▲ 0.215</b>	---	---
ppm Water	ppm	ASTM D6304	>1000	<b>▲ 2150</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>▲ MODER</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.1	<b>0.2%</b>	---	---

### FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oils additive package is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>1</b>	---	---
Boron	ppm	ASTM D5185m		<b>5</b>	---	---
Barium	ppm	ASTM D5185m		<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>4</b>	---	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>19</b>	---	---
Calcium	ppm	ASTM D5185m	87	<b>227</b>	---	---
Phosphorus	ppm	ASTM D5185m	727	<b>634</b>	---	---
Zinc	ppm	ASTM D5185m	900	<b>858</b>	---	---
Sulfur	ppm	ASTM D5185m	1500	<b>2152</b>	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	<b>0.73</b>	---	---
Visc @ 40°C	cSt	ASTM D445	65	<b>40.4</b>	---	---

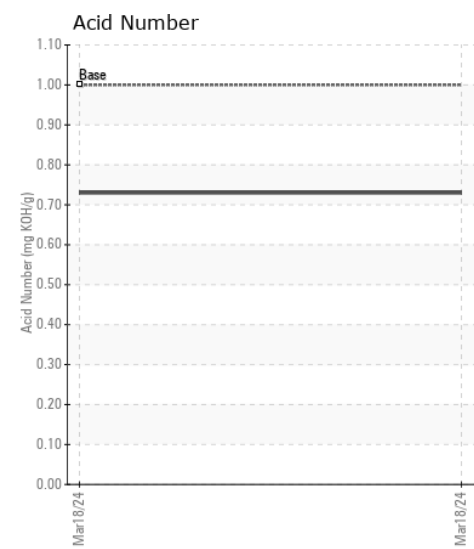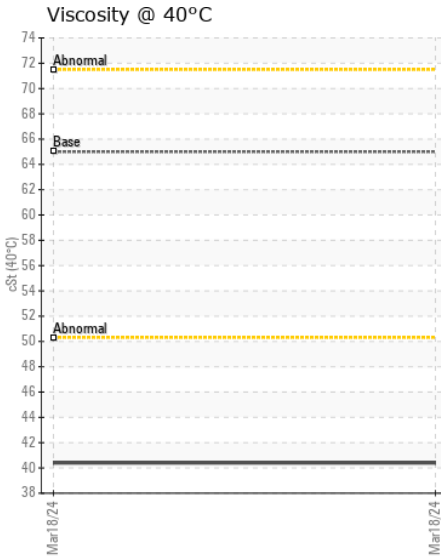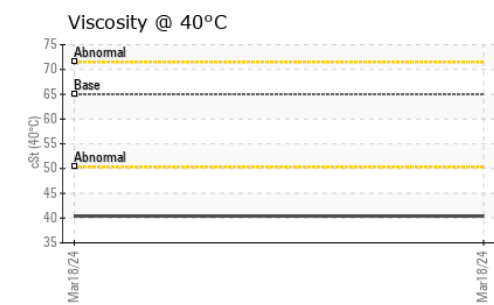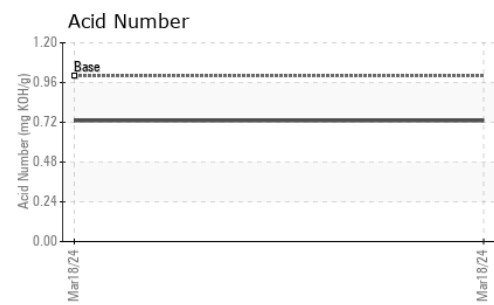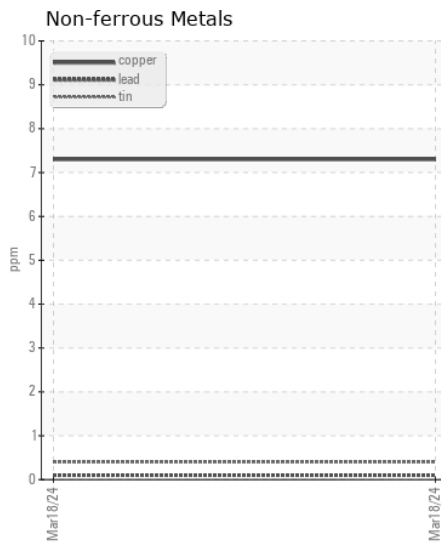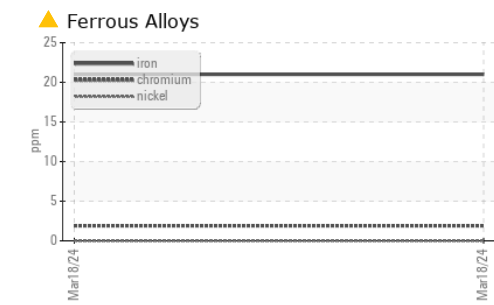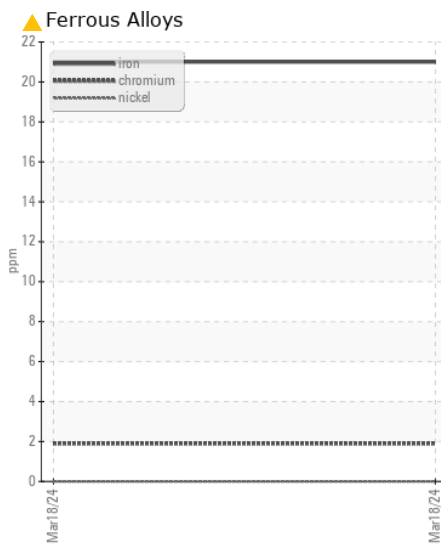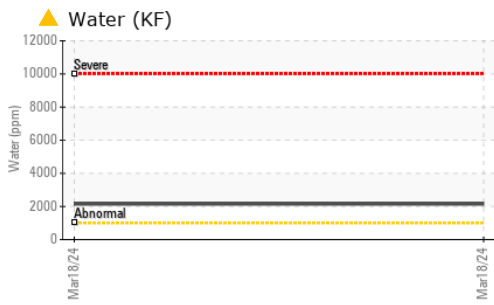

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0210501 **Received** : 20 Mar 2024  
**Lab Number** : 06123556 **Tested** : 25 Mar 2024  
**Unique Number** : 10937707 **Diagnosed** : 25 Mar 2024 - Jonathan Hester  
**Test Package** : CONST ( Additional Tests: KF, PQ )

**NPL CONSTRUCTION**  
 7611 COPPERMINE DR  
 MANASSAS, VA  
 US 20109-2668  
 Contact: BRANDON

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: