



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**6033**  
Component  
**Hydraulic System**  
Fluid  
**{not provided} (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0195376</b>	JR0159973	---
Sample Date		Client Info		<b>29 Feb 2024</b>	27 Apr 2023	---
Machine Age	hrs	Client Info		<b>4361</b>	3990	---
Oil Age	hrs	Client Info		<b>1000</b>	2000	---
Filter Age	hrs	Client Info		<b>1000</b>	2000	---
Oil Changed		Client Info		<b>Changed</b>	Changed	---
Filter Changed		Client Info		<b>N/A</b>	Changed	---
Sample Status				<b>NORMAL</b>	ATTENTION	---

### WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
Iron	ppm	ASTM D5185m	>20	<b>4</b>	8	---
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	<1	---
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	<1	---
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>10	<b>&lt;1</b>	4	---
Lead	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Copper	ppm	ASTM D5185m	>75	<b>12</b>	28	---
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

### CONTAMINATION











The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>20	<b>&lt;1</b>	2	---
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	---
Water		WC Method	>0.1	<b>NEG</b>	NEG	---
Particles >4µm		ASTM D7647	>5000	<b>1655</b>	5968	---
Particles >6µm		ASTM D7647	>1300	<b>334</b>	1777	---
Particles >14µm		ASTM D7647	>160	<b>43</b>	127	---
Particles >21µm		ASTM D7647	>40	<b>10</b>	17	---
Particles >38µm		ASTM D7647	>10	<b>1</b>	1	---
Particles >71µm		ASTM D7647	>3	<b>0</b>	0	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<b>18/16/13</b>	20/18/14	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	---

### FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>1</b>	<1	---
Boron	ppm	ASTM D5185m		<b>5</b>	11	---
Barium	ppm	ASTM D5185m		<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>2</b>	6	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m		<b>88</b>	64	---
Calcium	ppm	ASTM D5185m		<b>265</b>	437	---
Phosphorus	ppm	ASTM D5185m		<b>487</b>	693	---
Zinc	ppm	ASTM D5185m		<b>624</b>	923	---
Sulfur	ppm	ASTM D5185m		<b>6006</b>	2030	---
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.46</b>	0.68	---
Visc @ 40°C	cSt	ASTM D445		<b>44.0</b>	44.0	---

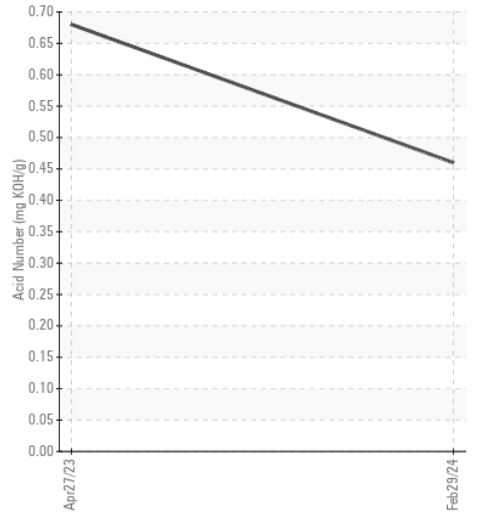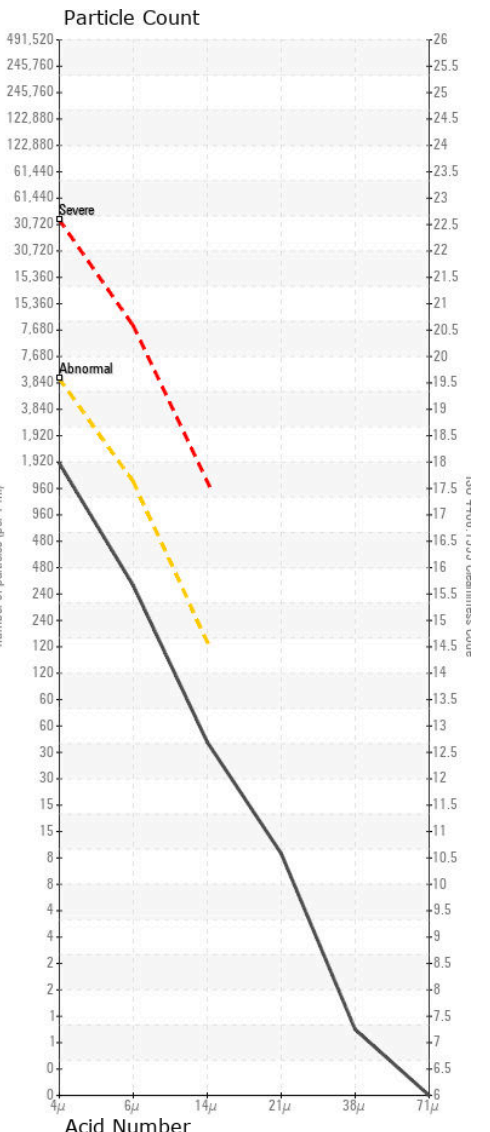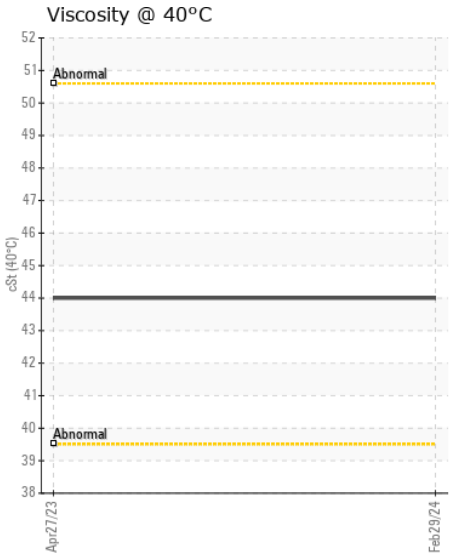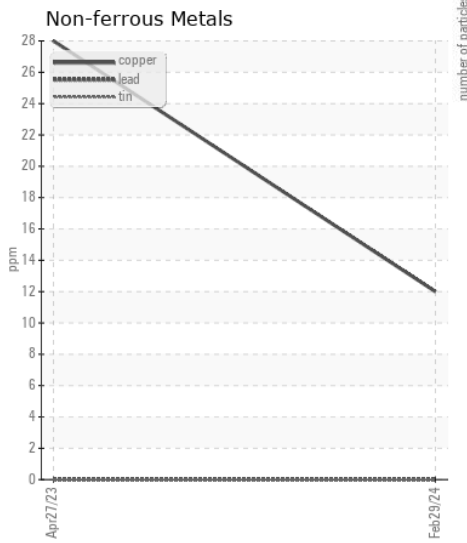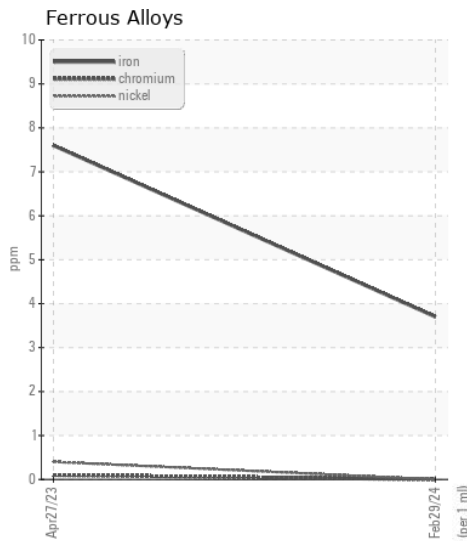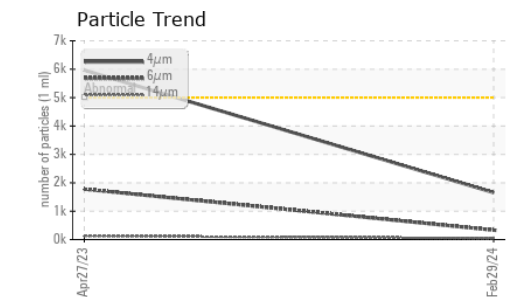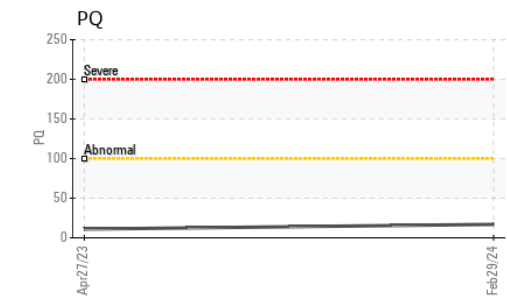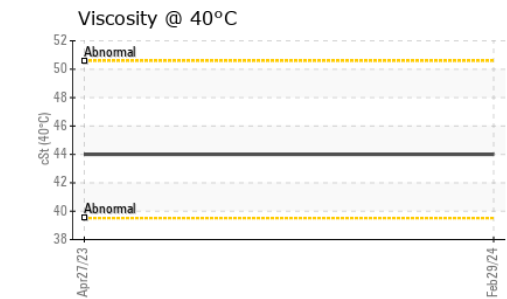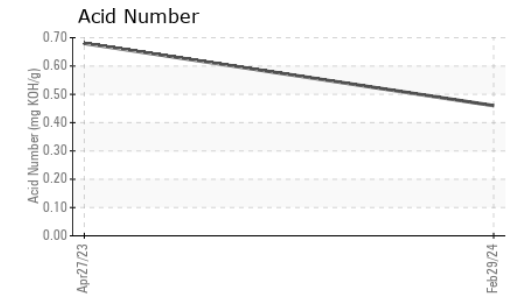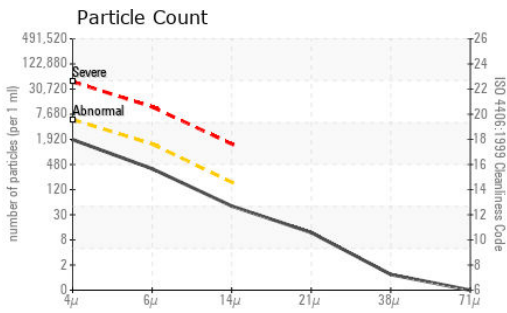

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0195376 **Received** : 20 Mar 2024  
**Lab Number** : 06123557 **Tested** : 24 Mar 2024  
**Unique Number** : 10937708 **Diagnosed** : 24 Mar 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: PQ )

**PATRIOT DEVELOPMENT CORP**  
 22721 LADBROOK DRIVE STE 120  
 STERLING, VA  
 US 20166  
 Contact: ROBERT MOSS  
 robert.moss@patriotdev.net  
 T:  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)