



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO A40G 342252
Component
Hydraulic System
Fluid
MOBIL 10W (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

WEAR

All component wear rates are normal.










CONTAMINATION

There is a high amount of particulates present in the oil.

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP401155	VCP445740	VCP396973
Sample Date		Client Info		11 Mar 2024	29 Nov 2023	25 Sep 2023
Machine Age	hrs	Client Info		11973	11431	11035
Oil Age	hrs	Client Info		938	396	1952
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	Not Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
Iron	ppm	ASTM D5185m	>50	2	0	<1
Chromium	ppm	ASTM D5185m	>20	0	0	0
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>20	2	1	1
Lead	ppm	ASTM D5185m	>20	0	0	<1
Copper	ppm	ASTM D5185m	>150	<1	2	<1
Tin	ppm	ASTM D5185m	>20	<1	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Silicon	ppm	ASTM D5185m	>20	12	11	11
Potassium	ppm	ASTM D5185m	>20	0	0	0
Water		WC Method	>0.1	NEG	NEG	NEG
Particles >4µm		ASTM D7647		33887	35544	65891
Particles >6µm		ASTM D7647	>5000	▲ 12122	▲ 9249	▲ 22164
Particles >14µm		ASTM D7647	>160	▲ 928	▲ 350	▲ 952
Particles >21µm		ASTM D7647	>40	▲ 180	▲ 90	▲ 200
Particles >38µm		ASTM D7647	>10	3	1	2
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>-/19/14	▲ 22/21/17	▲ 22/20/16	▲ 23/22/17
Silt	scalar	*Visual	NONE	NONE	NONE	LIGHT
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Sodium	ppm	ASTM D5185m		2	3	3
Boron	ppm	ASTM D5185m		3	1	2
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		2	1	<1
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		23	22	25
Calcium	ppm	ASTM D5185m		3281	3210	3095
Phosphorus	ppm	ASTM D5185m		896	881	869
Zinc	ppm	ASTM D5185m		1061	1052	1016
Sulfur	ppm	ASTM D5185m		7864	6750	6356
Acid Number (AN)	mg KOH/g	ASTM D8045		1.26	1.26	1.16
Visc @ 40°C	cSt	ASTM D445		39.2	39.1	39.2

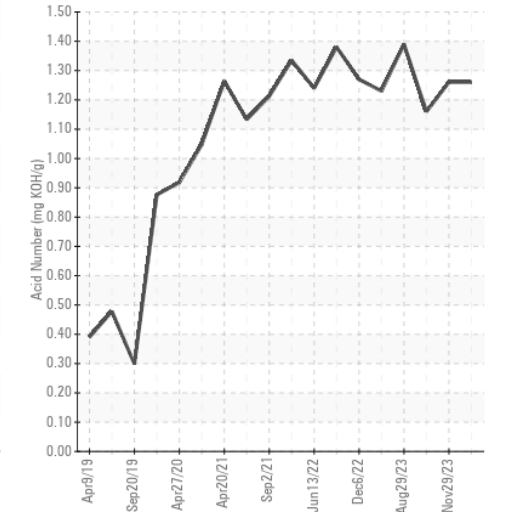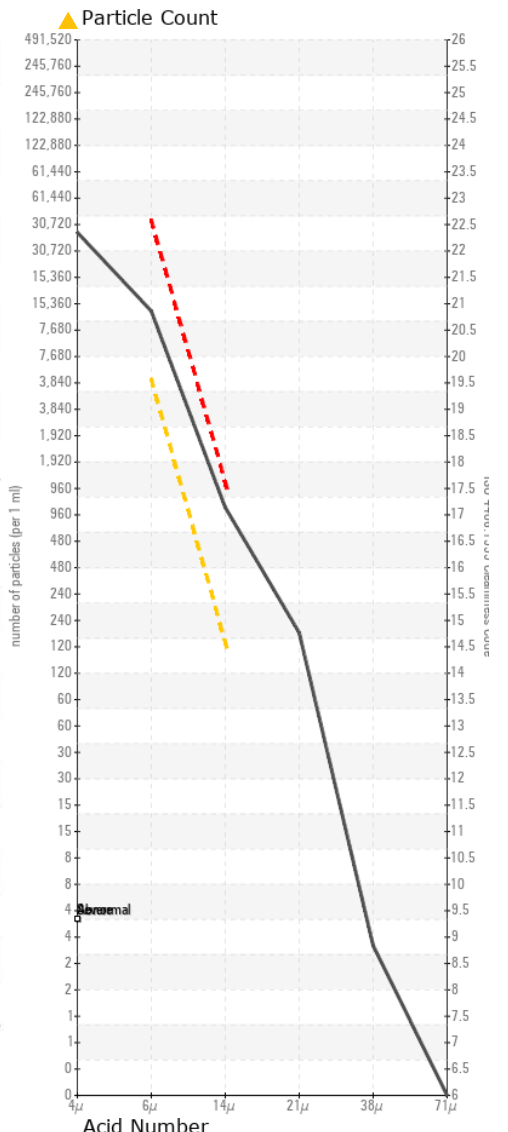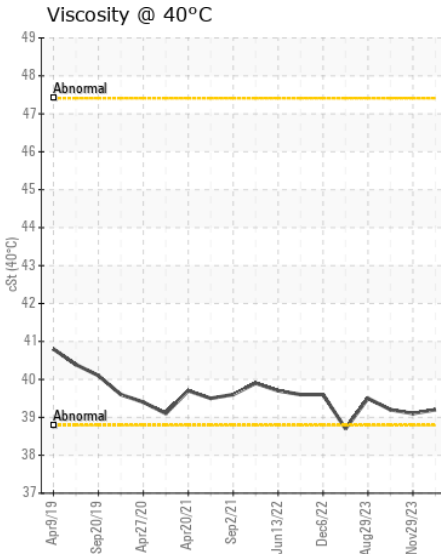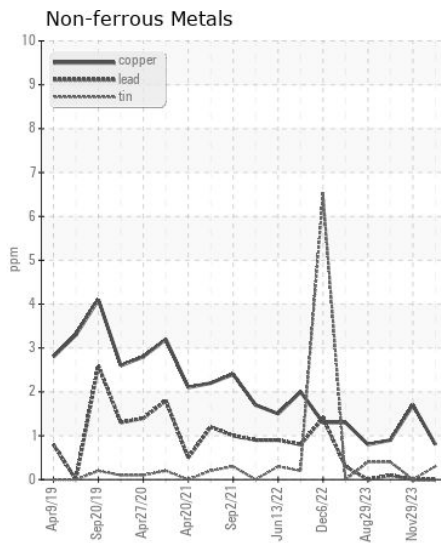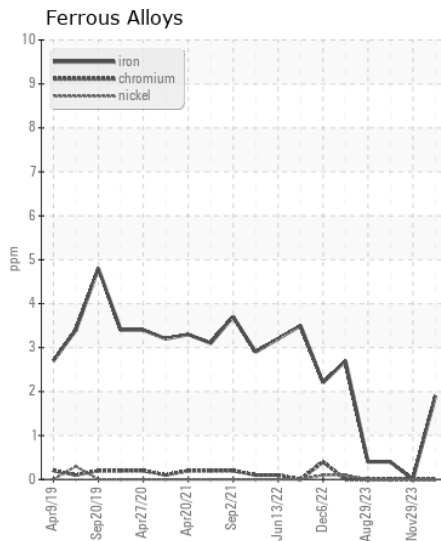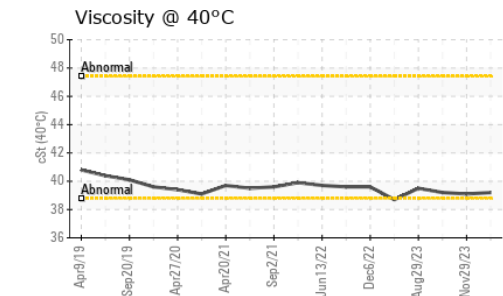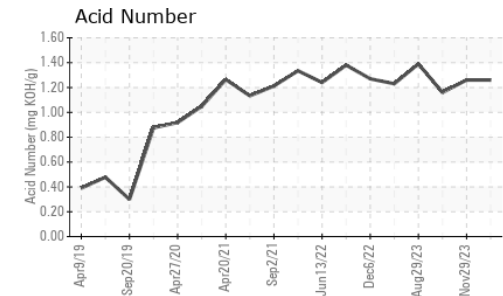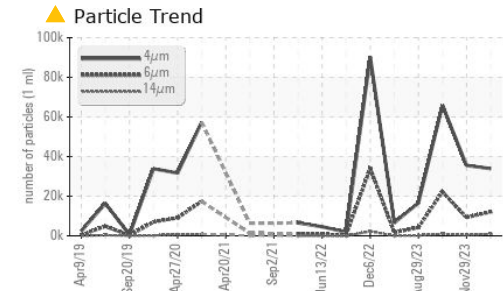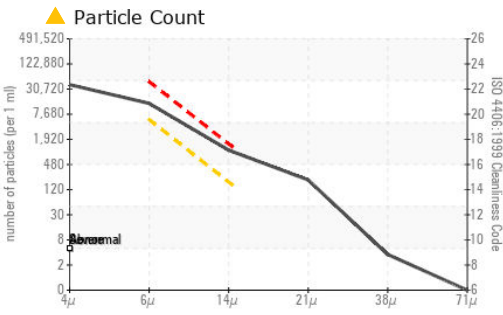

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP401155
Lab Number : 06123579
Unique Number : 10937730
Test Package : MOB 2
Received : 20 Mar 2024
Tested : 25 Mar 2024
Diagnosed : 25 Mar 2024 - Jonathan Hester

SCHILDBERG CONSTRUCTION COMPANY
 PO BOX 358
 GREENFIELD, IA
 US 50849
 Contact: SCOTT ARMSTRONG
 sarmstrong@schildberg.com
 T: (641)743-8237
 F: (641)743-2486

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)