



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 210P 1FF210PAVPF000576
 Component
Swing Drive Gear Case
 Fluid
JOHN DEERE GL-5 80W90 (3 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0201271	JR0200962	---
Sample Date		Client Info		19 Mar 2024	22 Jan 2024	---
Machine Age	hrs	Client Info		1067	532	---
Oil Age	hrs	Client Info		1067	532	---
Filter Age	hrs	Client Info		0	532	---
Oil Changed		Client Info		Changed	Not Changd	---
Filter Changed		Client Info		N/A	None	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		34	39	---
Iron	ppm	ASTM D5185m	>200	82	71	---
Chromium	ppm	ASTM D5185m	>10	<1	<1	---
Nickel	ppm	ASTM D5185m	>10	0	<1	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m		0	3	---
Lead	ppm	ASTM D5185m		0	<1	---
Copper	ppm	ASTM D5185m		0	<1	---
Tin	ppm	ASTM D5185m		0	<1	---
Vanadium	ppm	ASTM D5185m		0	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m		16	15	---
Potassium	ppm	ASTM D5185m	>20	<1	3	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		1	0	---
Boron	ppm	ASTM D5185m		62	63	---
Barium	ppm	ASTM D5185m		3	0	---
Molybdenum	ppm	ASTM D5185m		0	2	---
Manganese	ppm	ASTM D5185m		3	4	---
Magnesium	ppm	ASTM D5185m		0	0	---
Calcium	ppm	ASTM D5185m		15	50	---
Phosphorus	ppm	ASTM D5185m		535	522	---
Zinc	ppm	ASTM D5185m		6	5	---
Sulfur	ppm	ASTM D5185m		18131	17789	---
Visc @ 40°C	cSt	ASTM D445		187	188	---

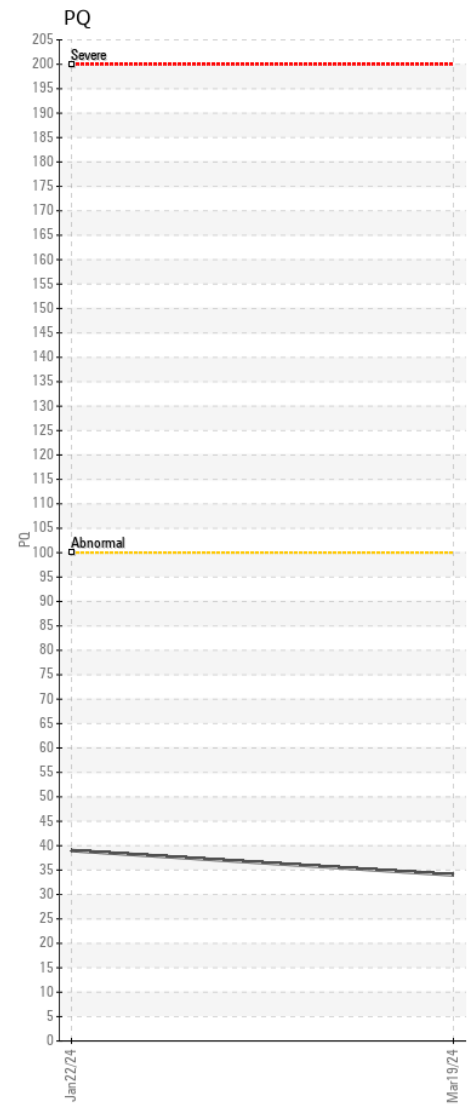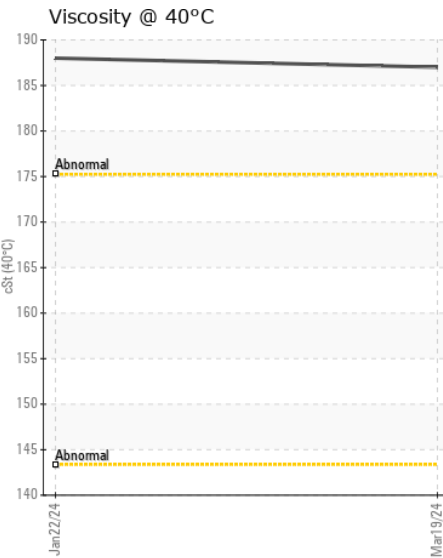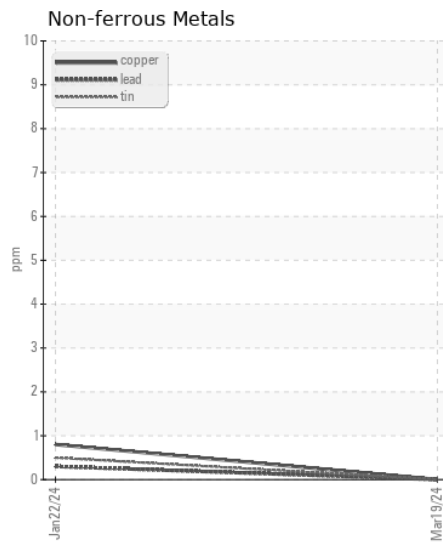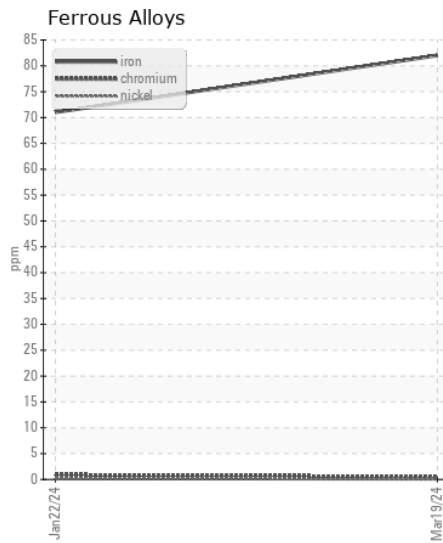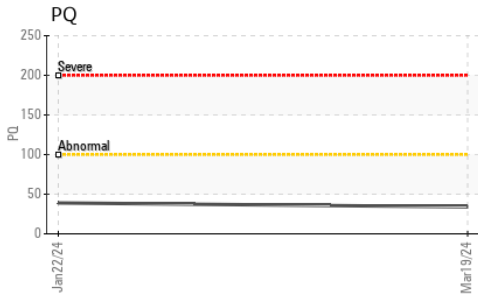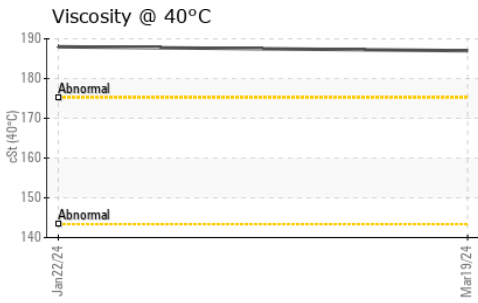

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : JR0201271

Lab Number : 06123898

Unique Number : 10938049

Test Package : CONST (Additional Tests: PQ)

Received : 20 Mar 2024

Tested : 21 Mar 2024

Diagnosed : 22 Mar 2024 - Don Baldrige

JRE - NEW BERN

3816 MARTIN LUTHER KING BLVD

NEW BERN, NC

US 28562

Contact: NEW BERN SHOP

nick.etherdridge@jamesriverequipment.com; canastasio@wearcheckusa.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: