



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 350P 1FF350PAKNF000420
Component
Left Final Drive
Fluid
JOHN DEERE GL-5 80W90 (11 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0200973	JR0182285	---
Sample Date		Client Info		19 Mar 2024	25 Sep 2023	---
Machine Age	hrs	Client Info		1187	721	---
Oil Age	hrs	Client Info		1187	721	---
Filter Age	hrs	Client Info		0	721	---
Oil Changed		Client Info		Not Changd	Not Changd	---
Filter Changed		Client Info		N/A	Not Changd	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	268	248	---
Iron	ppm	ASTM D5185m	>750	428	353	---
Chromium	ppm	ASTM D5185m	>9	8	6	---
Nickel	ppm	ASTM D5185m	>10	1	<1	---
Titanium	ppm	ASTM D5185m		1	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>40	3	1	---
Lead	ppm	ASTM D5185m	>15	<1	0	---
Copper	ppm	ASTM D5185m	>40	1	<1	---
Tin	ppm	ASTM D5185m	>10	0	0	---
Vanadium	ppm	ASTM D5185m		<1	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	20	13	---
Potassium	ppm	ASTM D5185m	>20	1	<1	---
Water		WC Method	>0.075	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	1	0	---
Boron	ppm	ASTM D5185m		69	80	---
Barium	ppm	ASTM D5185m		3	2	---
Molybdenum	ppm	ASTM D5185m		<1	<1	---
Manganese	ppm	ASTM D5185m		8	7	---
Magnesium	ppm	ASTM D5185m		2	<1	---
Calcium	ppm	ASTM D5185m		50	21	---
Phosphorus	ppm	ASTM D5185m		495	496	---
Zinc	ppm	ASTM D5185m		30	17	---
Sulfur	ppm	ASTM D5185m		17200	14949	---
Visc @ 40°C	cSt	ASTM D445		185	181	---

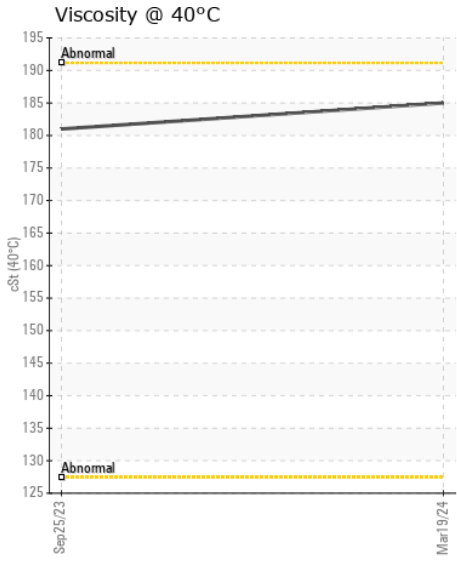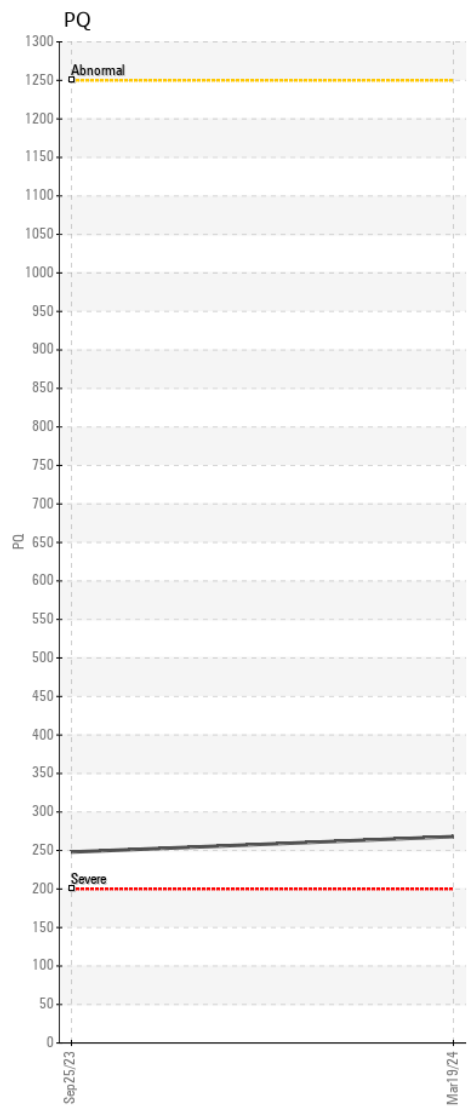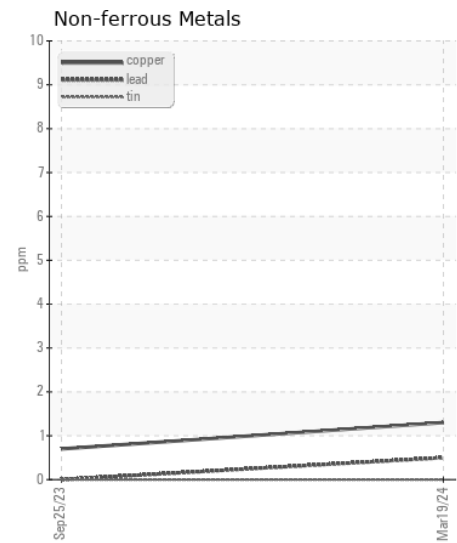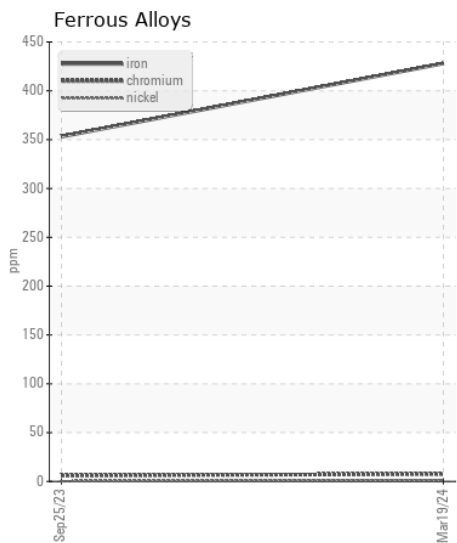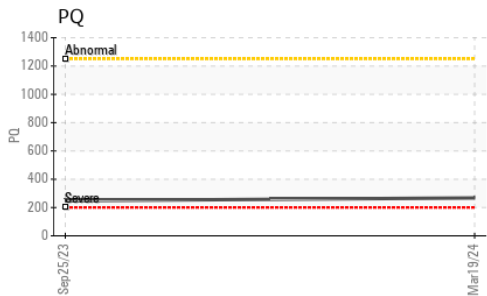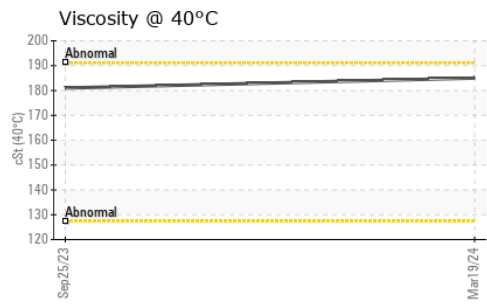

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0200973 **Received** : 20 Mar 2024
Lab Number : 06123931 **Tested** : 21 Mar 2024
Unique Number : 10938082 **Diagnosed** : 22 Mar 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

JRE - NEW BERN
 3816 MARTIN LUTHER KING BLVD
 NEW BERN, NC
 US 28562
 Contact: NEW BERN SHOP

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

nick.etherdridge@jamesriverequipment.com; canastasio@wearcheckusa.com

T:
F: