



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
6033
Component
Unknown Component
Fluid
NOT GIVEN (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

WEAR

All component wear rates are normal.

CONTAMINATION

There is no indication of any contamination in the sample.

FLUID CONDITION







The condition of the sample is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0195374	JR0159972	---
Sample Date		Client Info		29 Feb 2024	27 Apr 2023	---
Machine Age	hrs	Client Info		4361	3990	---
Oil Age	hrs	Client Info		1000	2000	---
Filter Age	hrs	Client Info		1000	2000	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		N/A	Changed	---
Sample Status				NORMAL	NORMAL	---

PQ		ASTM D8184		17	13	---
Iron	ppm	ASTM D5185m		11	53	---
Chromium	ppm	ASTM D5185m		<1	<1	---
Nickel	ppm	ASTM D5185m		1	4	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m		2	<1	---
Lead	ppm	ASTM D5185m		2	<1	---
Copper	ppm	ASTM D5185m		22	<1	---
Tin	ppm	ASTM D5185m		<1	0	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	MODER	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

Silicon	ppm	ASTM D5185m		8	35	---
Potassium	ppm	ASTM D5185m	>20	<1	<1	---
Water		WC Method		NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual		NEG	NEG	---

Sodium	ppm	ASTM D5185m		1	5	---
Boron	ppm	ASTM D5185m		10	0	---
Barium	ppm	ASTM D5185m		0	8	---
Molybdenum	ppm	ASTM D5185m		<1	31	---
Manganese	ppm	ASTM D5185m		<1	1	---
Magnesium	ppm	ASTM D5185m		3	1	---
Calcium	ppm	ASTM D5185m		74	29	---
Phosphorus	ppm	ASTM D5185m		342	438	---
Zinc	ppm	ASTM D5185m		46	46	---
Sulfur	ppm	ASTM D5185m		9092	170	---
Visc @ 40°C	cSt	ASTM D445		225	220	---

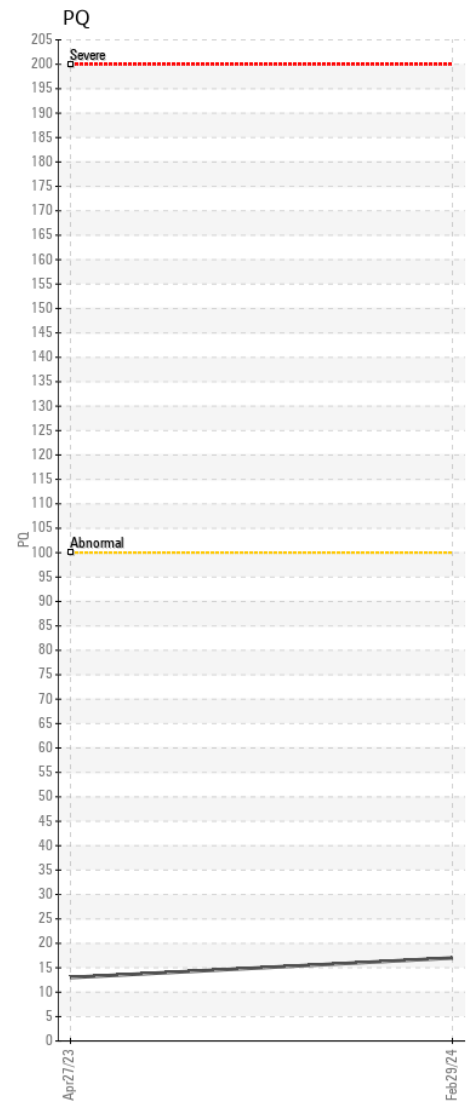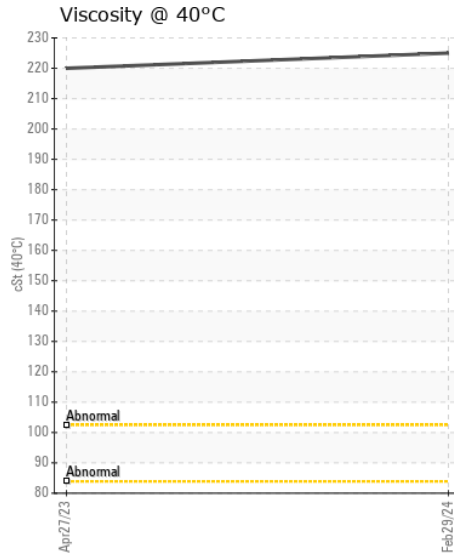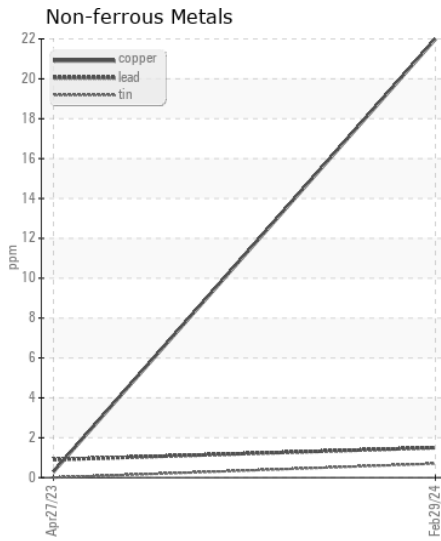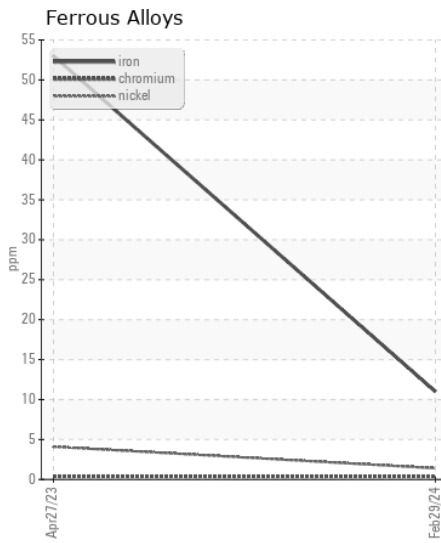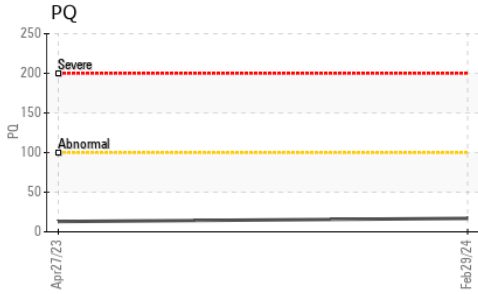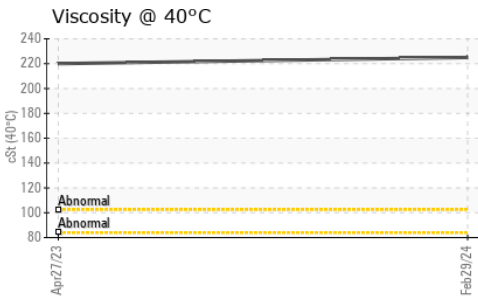

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0195374 **Received** : 20 Mar 2024
Lab Number : 06123959 **Tested** : 21 Mar 2024
Unique Number : 10938110 **Diagnosed** : 22 Mar 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

PATRIOT DEVELOPMENT CORP
 22721 LADBROOK DRIVE STE 120
 STERLING, VA
 US 20166
 Contact: ROBERT MOSS
 robert.moss@patriotdev.net

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: