



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**JOHN DEERE 755K 1T0755KXHNF421851**  
 Component  
**Left Inner Final Drive**  
 Fluid  
**JOHN DEERE HY-GARD HYD/TRANS (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0208244</b>	JR0187616	JR0174705
Sample Date		Client Info		<b>18 Mar 2024</b>	18 Sep 2023	30 May 2023
Machine Age	hrs	Client Info		<b>2474</b>	1936	1451
Oil Age	hrs	Client Info		<b>538</b>	1000	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Chngd</b>	Changed	Not Chngd
Filter Changed		Client Info		<b>None</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	<b>13</b>	19	70
Iron	ppm	ASTM D5185m	>750	<b>9</b>	24	69
Chromium	ppm	ASTM D5185m	>9	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>40	<b>2</b>	0	5
Lead	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	0
Copper	ppm	ASTM D5185m	>40	<b>&lt;1</b>	<1	0
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	MODER
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	<b>6</b>	4	22
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	1	1
Water		WC Method	>0.075	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>LIGHT</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	<b>0</b>	<1	0
Boron	ppm	ASTM D5185m	6	<b>6</b>	6	6
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	0	<b>5</b>	6	4
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m	145	<b>115</b>	123	127
Calcium	ppm	ASTM D5185m	3570	<b>3400</b>	3530	3406
Phosphorus	ppm	ASTM D5185m	1290	<b>973</b>	991	1004
Zinc	ppm	ASTM D5185m	1640	<b>1233</b>	1246	1265
Sulfur	ppm	ASTM D5185m		<b>3721</b>	4101	4420
Visc @ 40°C	cSt	ASTM D445	57.0	<b>56.4</b>	51.2	55.4

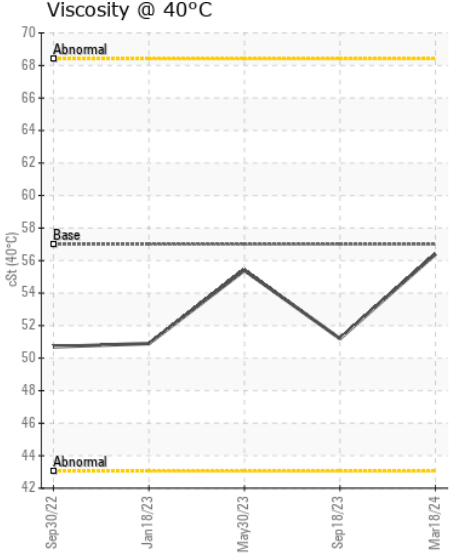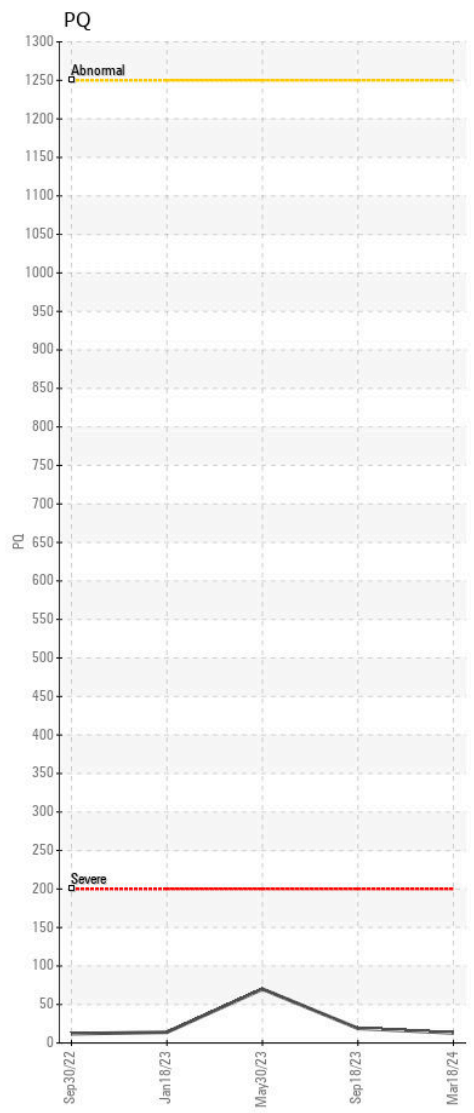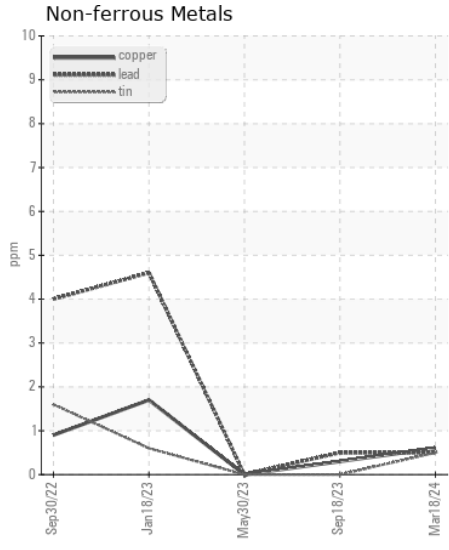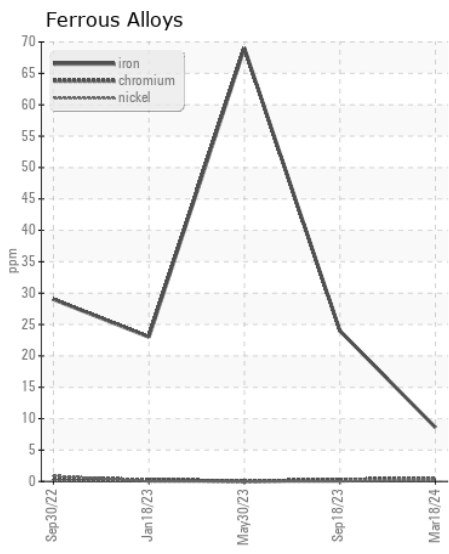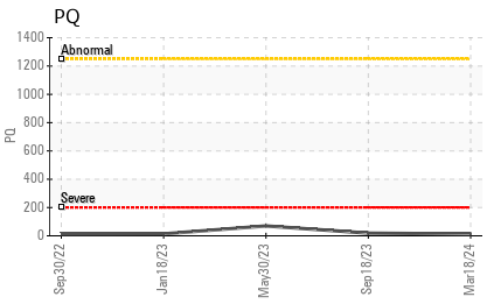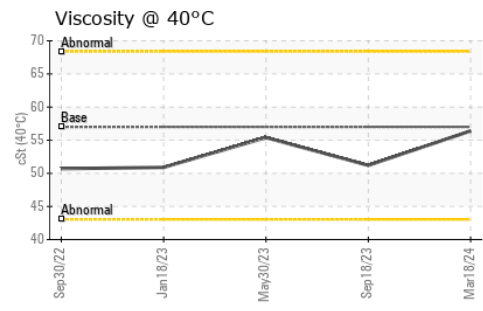

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0208244 **Received** : 20 Mar 2024  
**Lab Number** : 06123965 **Tested** : 21 Mar 2024  
**Unique Number** : 10938116 **Diagnosed** : 21 Mar 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: PQ )

**B & S SITE DEVELOPMENT**  
 7800 PINEY BRANCH LANE  
 BRISTOW, VA  
 US 20136  
 Contact: DANNY HUFF  
 dhuff@bandssite.com  
 T: (540)270-3203  
 F: (703)753-0605

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)