



# OIL ANALYSIS REPORT

WEAR  
CONTAMINATION  
FLUID CONDITION

**ATTENTION**  
**ABNORMAL**  
**NORMAL**

Area

[SPM687919 USED]

Machine Id

FUCHS MHL340F2 340410/5529

Component

Front Left Final Drive

Fluid

GEAR OIL SAE 80W90 (--- GAL)

## RECOMMENDATION

We advise that you check all areas where dirt can enter the system. The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

## WEAR

All component wear rates are normal.

## CONTAMINATION

Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

## FLUID CONDITION












The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP443515	---	---
Sample Date		Client Info		18 Mar 2024	---	---
Machine Age	hrs	Client Info		6030	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ABNORMAL	---	---

Iron	ppm	ASTM D5185m	>500	359	---	---
Chromium	ppm	ASTM D5185m	>10	4	---	---
Nickel	ppm	ASTM D5185m	>10	2	---	---
Titanium	ppm	ASTM D5185m		2	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	18	---	---
Lead	ppm	ASTM D5185m	>25	2	---	---
Copper	ppm	ASTM D5185m	>50	44	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

Silicon	ppm	ASTM D5185m	>75	152	---	---
Potassium	ppm	ASTM D5185m	>20	7	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

Sodium	ppm	ASTM D5185m	>170	12	---	---
Boron	ppm	ASTM D5185m	400	19	---	---
Barium	ppm	ASTM D5185m	200	271	---	---
Molybdenum	ppm	ASTM D5185m	12	1	---	---
Manganese	ppm	ASTM D5185m		9	---	---
Magnesium	ppm	ASTM D5185m	12	45	---	---
Calcium	ppm	ASTM D5185m	150	687	---	---
Phosphorus	ppm	ASTM D5185m	1650	1115	---	---
Zinc	ppm	ASTM D5185m	125	215	---	---
Sulfur	ppm	ASTM D5185m	22500	27063	---	---
Visc @ 40°C	cSt	ASTM D445	143	163	---	---

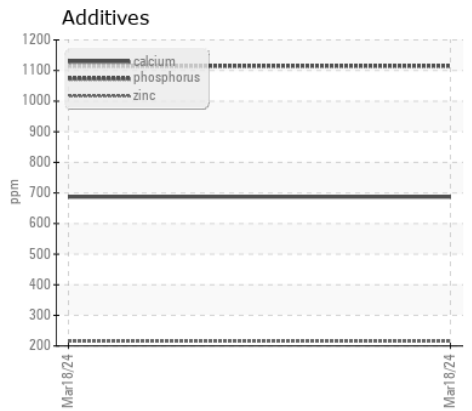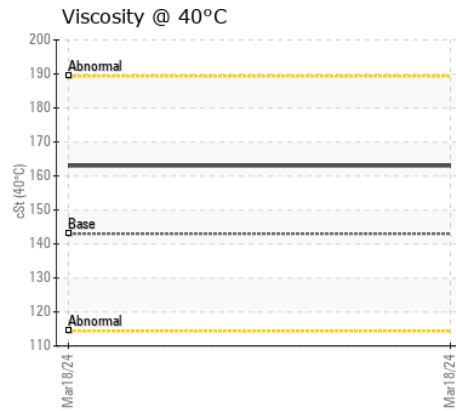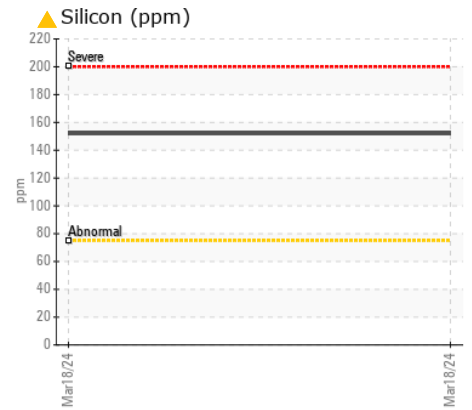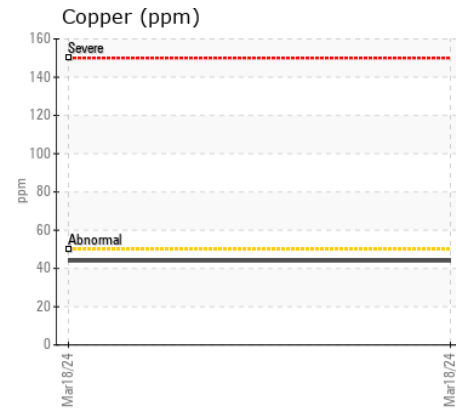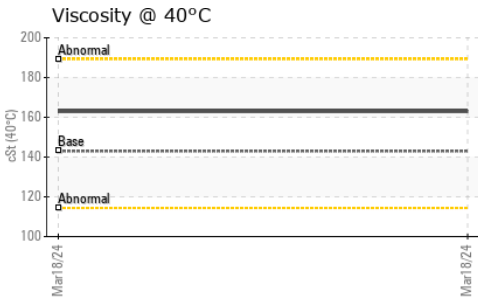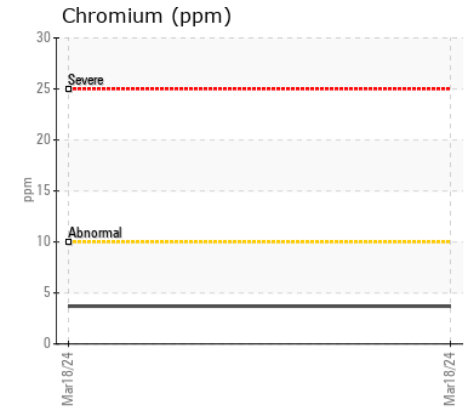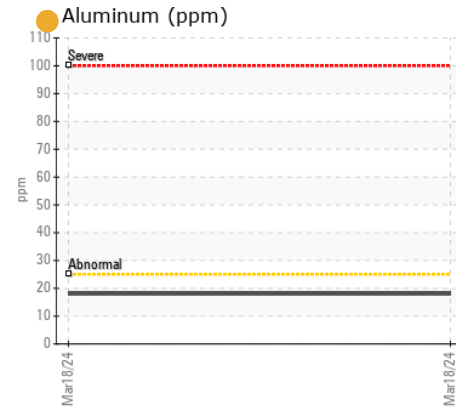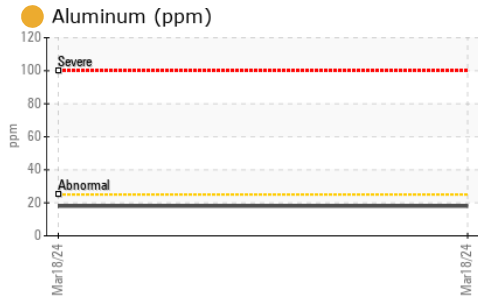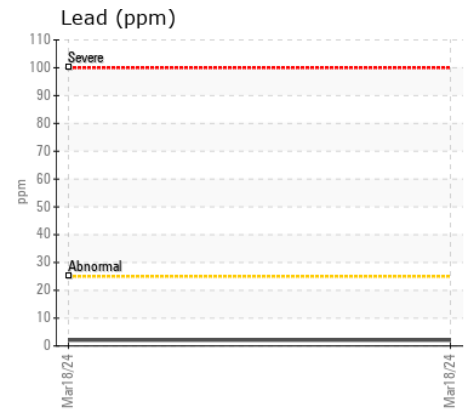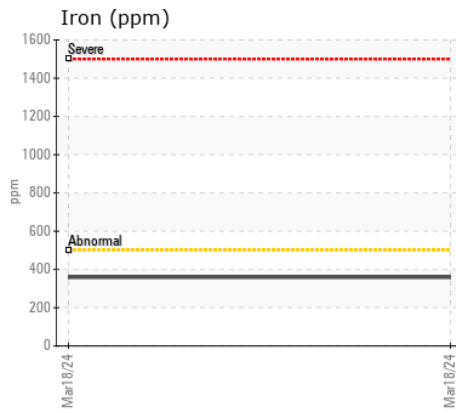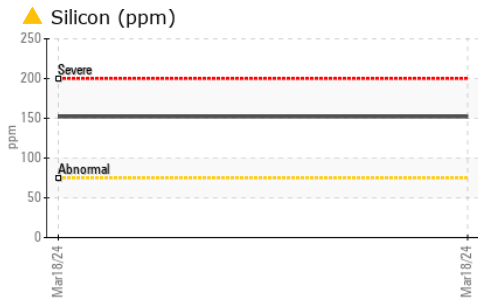

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP443515  
**Lab Number** : 06124025  
**Unique Number** : 10938176  
**Test Package** : MOB 1

**Received** : 20 Mar 2024  
**Tested** : 21 Mar 2024  
**Diagnosed** : 22 Mar 2024 - Don Baldrige

**ALTA EQUIPMENT CO - ORLAND PARK**  
 5000 INDUSTRIAL HWY  
 GARY, IN  
 US 46406  
 Contact: DAVE ENG  
 DAVE.ENG@ALTG.COM  
 T: (312)350-2560  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)