



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[SPM687919 USED]
 Machine Id
FUCHS MHL340F2 340410/5529
 Component
Rear Axle
 Fluid
GEAR OIL SAE 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP443522	---	---
Sample Date		Client Info		18 Mar 2024	---	---
Machine Age	hrs	Client Info		6030	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	106	---	---
Chromium	ppm	ASTM D5185m	>10	<1	---	---
Nickel	ppm	ASTM D5185m	>10	1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	2	---	---
Lead	ppm	ASTM D5185m	>25	2	---	---
Copper	ppm	ASTM D5185m	>50	33	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	LIGHT	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	12	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>170	2	---	---
Boron	ppm	ASTM D5185m	400	4	---	---
Barium	ppm	ASTM D5185m	200	4	---	---
Molybdenum	ppm	ASTM D5185m	12	6	---	---
Manganese	ppm	ASTM D5185m		3	---	---
Magnesium	ppm	ASTM D5185m	12	12	---	---
Calcium	ppm	ASTM D5185m	150	113	---	---
Phosphorus	ppm	ASTM D5185m	1650	296	---	---
Zinc	ppm	ASTM D5185m	125	85	---	---
Sulfur	ppm	ASTM D5185m	22500	23201	---	---
Visc @ 40°C	cSt	ASTM D445	143	130	---	---

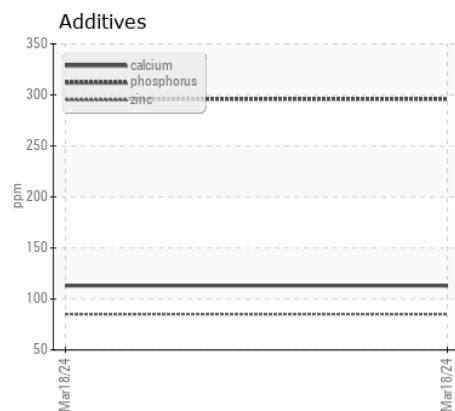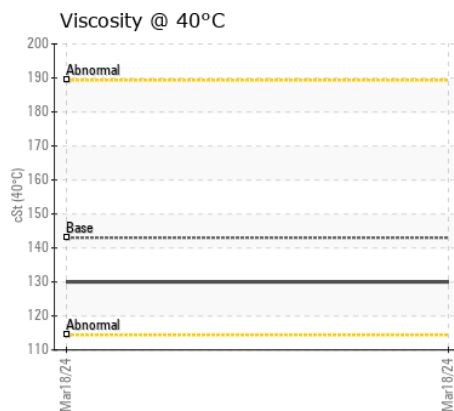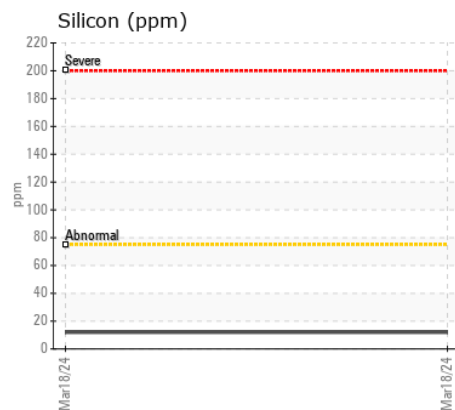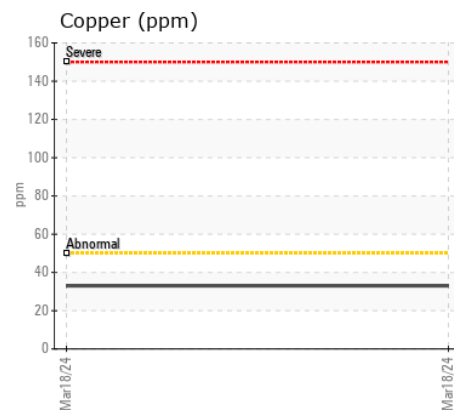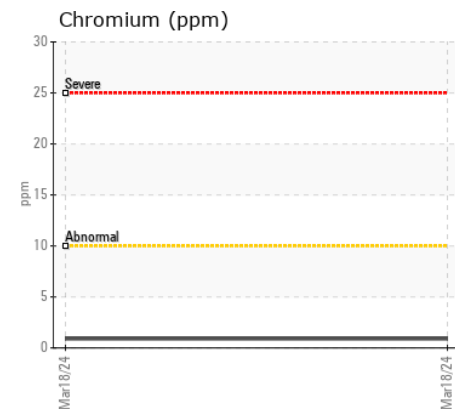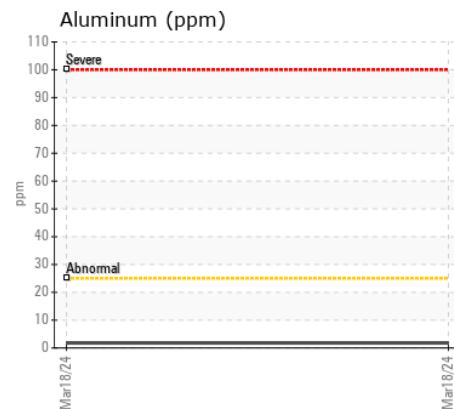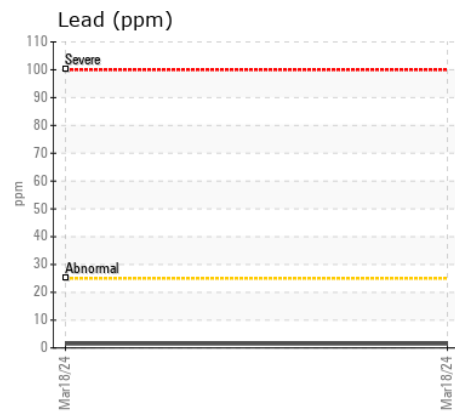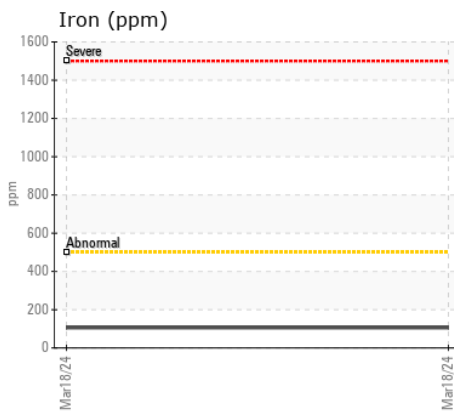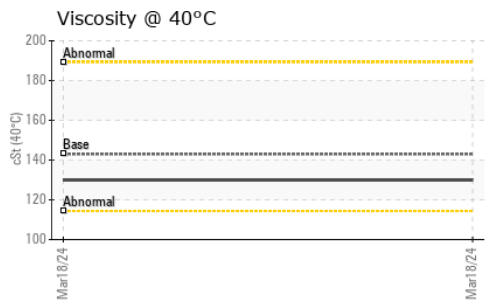

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP443522
Lab Number : 06124026
Unique Number : 10938177
Test Package : MOB 1

Received : 20 Mar 2024
Tested : 21 Mar 2024
Diagnosed : 21 Mar 2024 - Wes Davis

ALTA EQUIPMENT CO - ORLAND PARK
 5000 INDUSTRIAL HWY
 GARY, IN
 US 46406
 Contact: DAVE ENG
 DAVE.ENG@ALTG.COM
 T: (312)350-2560
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)