



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[A12260]
Machine Id
VOLVO L110H 632556
Component
Front Axle
Fluid
MOBIL WB 102 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP446201	VCP430834	---
Sample Date		Client Info		07 Mar 2024	05 Oct 2023	---
Machine Age	hrs	Client Info		2290	1195	---
Oil Age	hrs	Client Info		1000	1195	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Not Changed	Not Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	74	321	---
Chromium	ppm	ASTM D5185m	>20	2	7	---
Nickel	ppm	ASTM D5185m	>10	<1	2	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>30	2	0	---
Lead	ppm	ASTM D5185m	>50	<1	<1	---
Copper	ppm	ASTM D5185m	>120	<1	1	---
Tin	ppm	ASTM D5185m	>20	<1	0	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	11	27	---
Potassium	ppm	ASTM D5185m	>20	1	3	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	<1	---
Boron	ppm	ASTM D5185m		88	120	---
Barium	ppm	ASTM D5185m		0	1	---
Molybdenum	ppm	ASTM D5185m		6	16	---
Manganese	ppm	ASTM D5185m		3	15	---
Magnesium	ppm	ASTM D5185m		57	11	---
Calcium	ppm	ASTM D5185m		2818	3967	---
Phosphorus	ppm	ASTM D5185m		896	1306	---
Zinc	ppm	ASTM D5185m		1170	1671	---
Sulfur	ppm	ASTM D5185m		3238	4340	---
Visc @ 40°C	cSt	ASTM D445		42.6	41.7	---

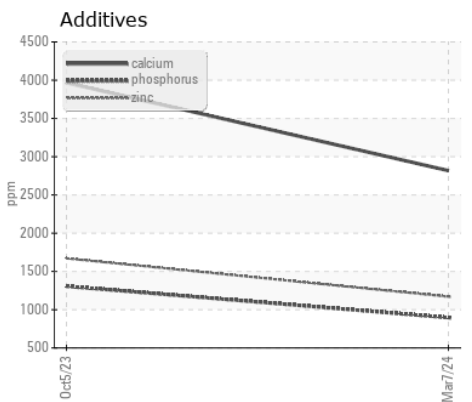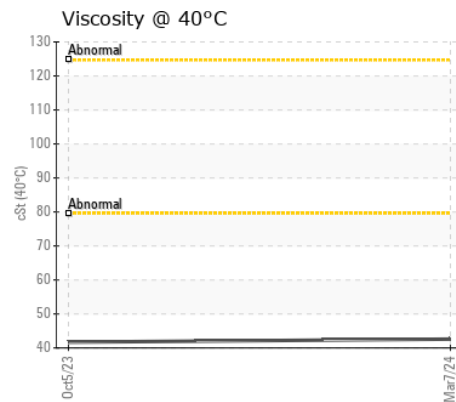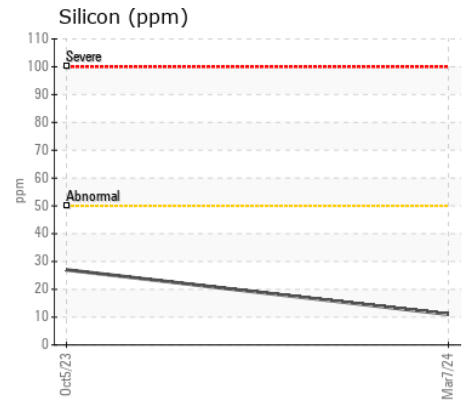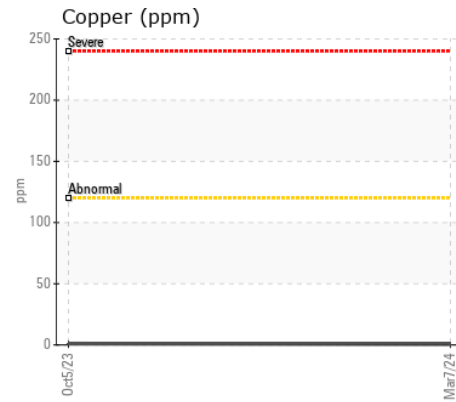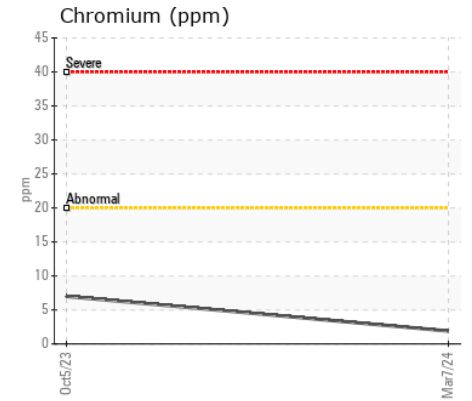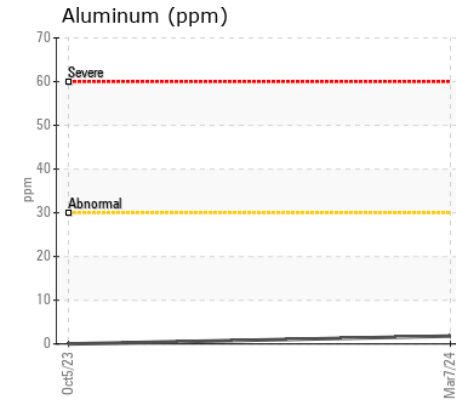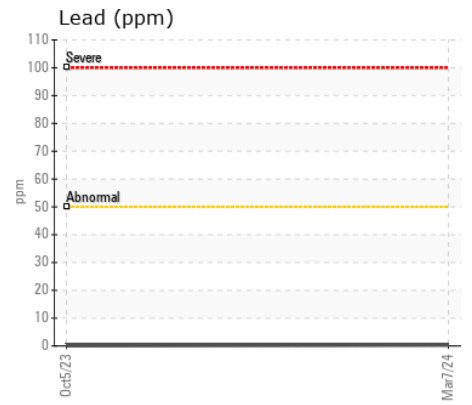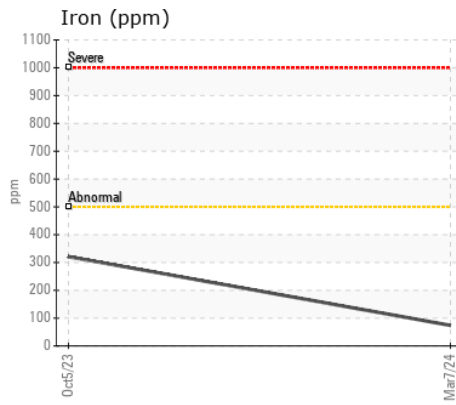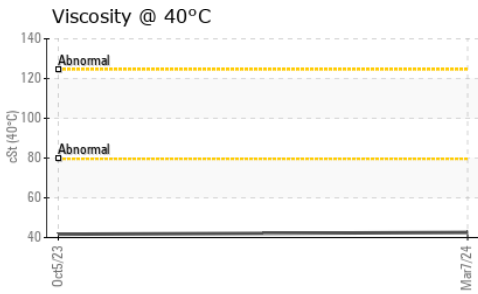

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP446201
Lab Number : 06124041
Unique Number : 10938192
Test Package : MOB 1

Received : 20 Mar 2024
Tested : 21 Mar 2024
Diagnosed : 21 Mar 2024 - Wes Davis

HMR ASSOCIATES
 PO BOX 485
 TOUGHKENAMON, PA
 US 19374
 Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: (610)268-2225