



VOLVO

OIL ANALYSIS REPORT

| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |



Area
[2801]
Machine Id
VOLVO A40G 342373
Component
Rear Axle
Fluid
MOBIL MOBILUBE HD PLUS 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number | | Client Info | | VCP399415 | VCP341871 | VCP402952 |
| Sample Date | | Client Info | | 12 Mar 2024 | 09 Oct 2023 | 29 Aug 2023 |
| Machine Age | hrs | Client Info | | 12715 | 11957 | 11645 |
| Oil Age | hrs | Client Info | | 758 | 995 | 683 |
| Filter Age | hrs | Client Info | | 0 | 0 | 0 |
| Oil Changed | | Client Info | | Not Changed | Changed | Not Changed |
| Filter Changed | | Client Info | | Not Changed | Not Changed | Not Changed |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|--------------|-------|------|
| Iron | ppm | ASTM D5185m | >900 | 11 | 23 | 13 |
| Chromium | ppm | ASTM D5185m | >20 | <1 | <1 | <1 |
| Nickel | ppm | ASTM D5185m | >10 | <1 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | | <1 | <1 | 0 |
| Silver | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >30 | 2 | 2 | 0 |
| Lead | ppm | ASTM D5185m | >50 | <1 | 0 | 0 |
| Copper | ppm | ASTM D5185m | >150 | 2 | <1 | 0 |
| Tin | ppm | ASTM D5185m | >20 | <1 | 0 | 0 |
| Vanadium | ppm | ASTM D5185m | | <1 | 0 | 0 |
| White Metal | scalar | *Visual | NONE | NONE | MODER | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |

CONTAMINATION










There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|--------|-------------|-------|--------------|-------|-------|
| Silicon | ppm | ASTM D5185m | >50 | 6 | 12 | 3 |
| Potassium | ppm | ASTM D5185m | >20 | 1 | 2 | 0 |
| Water | | WC Method | >0.2 | NEG | NEG | NEG |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | LIGHT | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG | NEG |

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

| | | | | | | |
|-------------|-----|-------------|-----|--------------|-------|-------|
| Sodium | ppm | ASTM D5185m | | <1 | 0 | 0 |
| Boron | ppm | ASTM D5185m | | 170 | 173 | 198 |
| Barium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | | 2 | 1 | <1 |
| Manganese | ppm | ASTM D5185m | | <1 | 0 | 0 |
| Magnesium | ppm | ASTM D5185m | | 12 | 10 | 10 |
| Calcium | ppm | ASTM D5185m | | 306 | 438 | 432 |
| Phosphorus | ppm | ASTM D5185m | | 953 | 976 | 1009 |
| Zinc | ppm | ASTM D5185m | | 126 | 148 | 145 |
| Sulfur | ppm | ASTM D5185m | | 25972 | 26612 | 29114 |
| Visc @ 40°C | cSt | ASTM D445 | 139 | 137 | 132 | 133 |

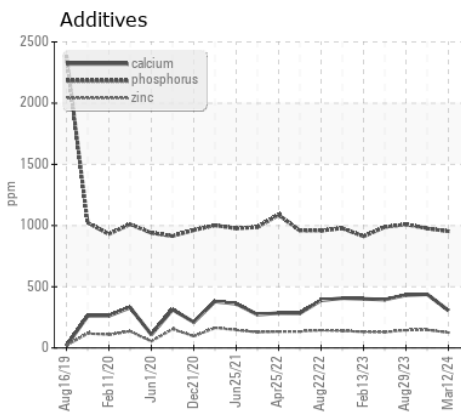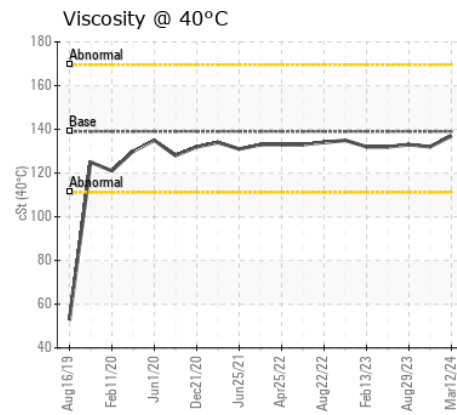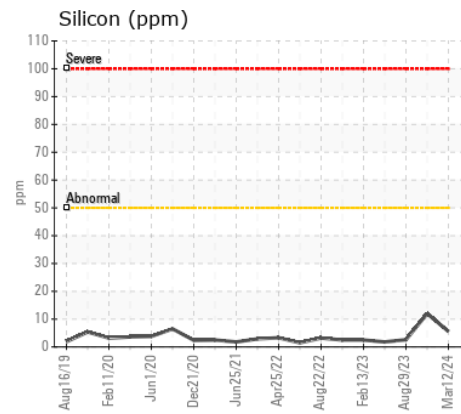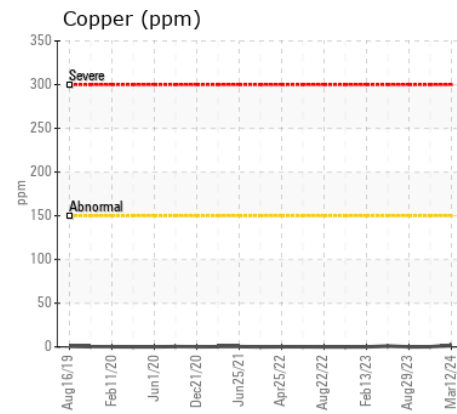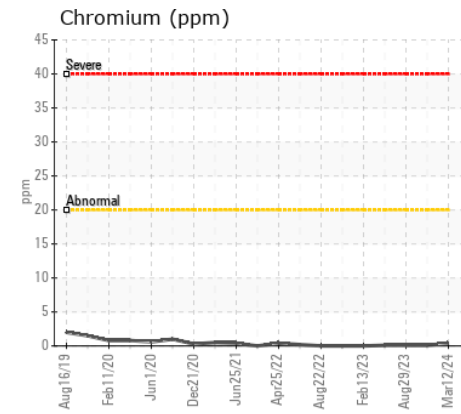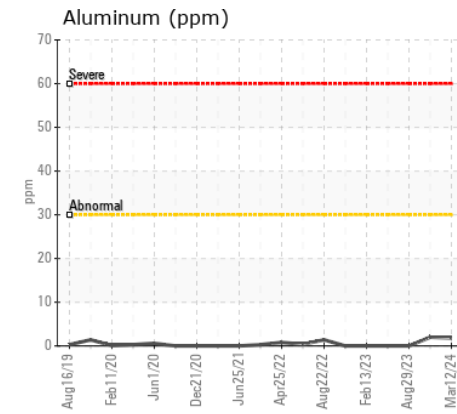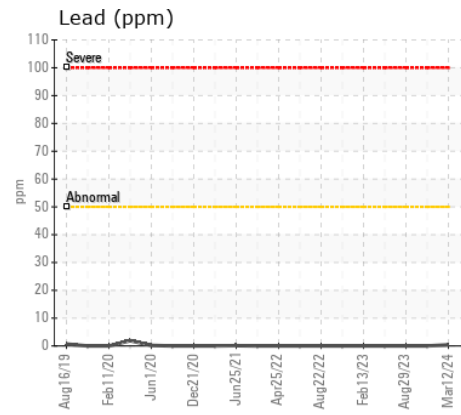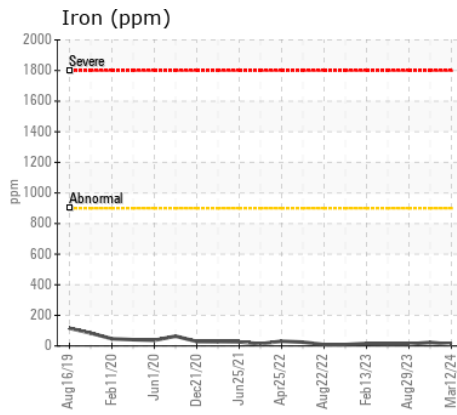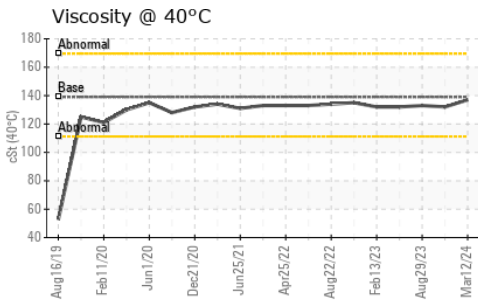

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP399415
Lab Number : 06124063
Unique Number : 10938214
Test Package : MOB 1

Received : 20 Mar 2024
Tested : 21 Mar 2024
Diagnosed : 21 Mar 2024 - Wes Davis

SCHILBERG CONSTRUCTION COMPANY
 PO BOX 358
 GREENFIELD, IA
 US 50849
 Contact: SCOTT ARMSTRONG
 sarmstrong@schildberg.com
 T: (641)743-8237
 F: (641)743-2486

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)