



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[6872]
Machine Id
VOLVO A30 753369
Component
Bogie/Center Axle
Fluid
VOLVO PREMIUM GEAR OIL 85W-140 GL-5 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP444328	VCP437663	VCP432916
Sample Date		Client Info		12 Mar 2024	04 Jan 2024	23 Oct 2023
Machine Age	hrs	Client Info		1941	1486	1052
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	N/A	Changed
Filter Changed		Client Info		Changed	Not Changed	Not Changed
Sample Status				NORMAL	NORMAL	ATTENTION

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>900	178	139	545
Chromium	ppm	ASTM D5185m	>20	3	2	9
Nickel	ppm	ASTM D5185m	>10	2	<1	4
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>30	2	0	<1
Lead	ppm	ASTM D5185m	>50	<1	0	0
Copper	ppm	ASTM D5185m	>150	6	5	21
Tin	ppm	ASTM D5185m	>20	<1	<1	<1
Vanadium	ppm	ASTM D5185m		<1	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	3	2	5
Potassium	ppm	ASTM D5185m	>20	2	0	3
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	<1	0
Boron	ppm	ASTM D5185m	111	176	170	279
Barium	ppm	ASTM D5185m	0.0	0	0	3
Molybdenum	ppm	ASTM D5185m	0.9	3	0	8
Manganese	ppm	ASTM D5185m	0.0	4	4	15
Magnesium	ppm	ASTM D5185m	39	5	4	6
Calcium	ppm	ASTM D5185m	93	101	46	171
Phosphorus	ppm	ASTM D5185m	920	963	1046	1501
Zinc	ppm	ASTM D5185m	104	44	15	78
Sulfur	ppm	ASTM D5185m	20179	28285	26023	24662
Visc @ 40°C	cSt	ASTM D445	333	249	253	98.0

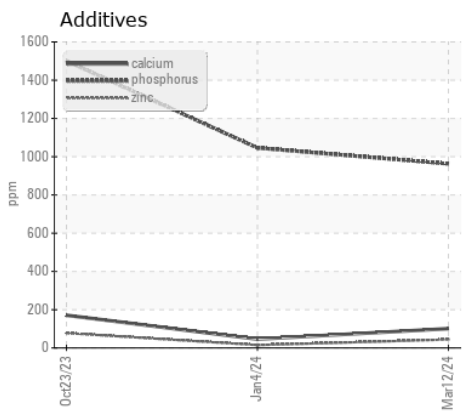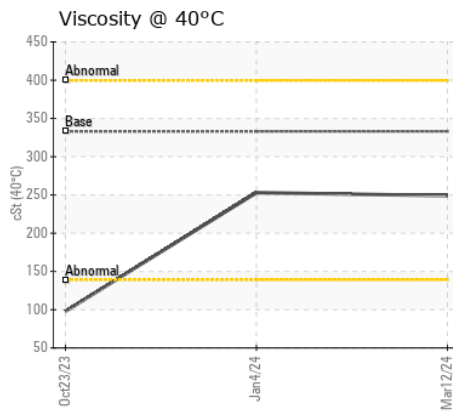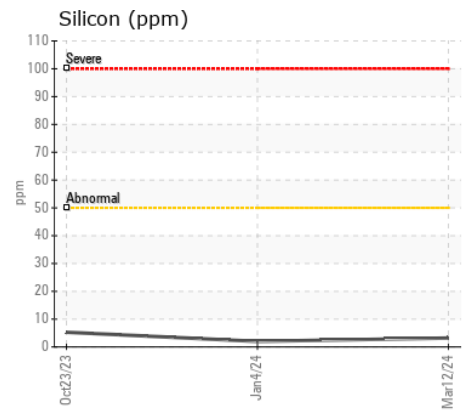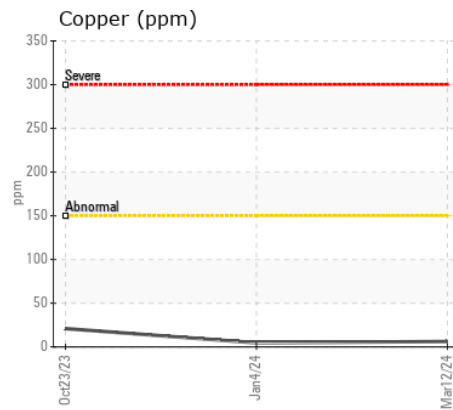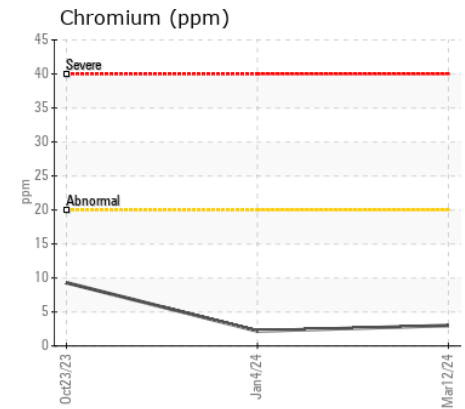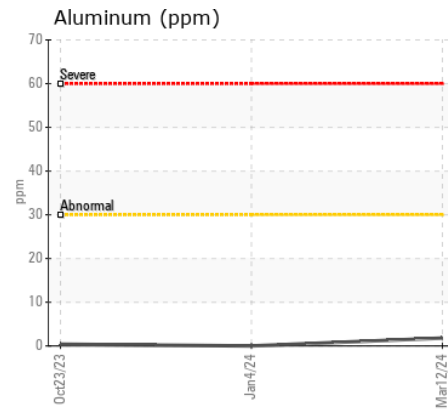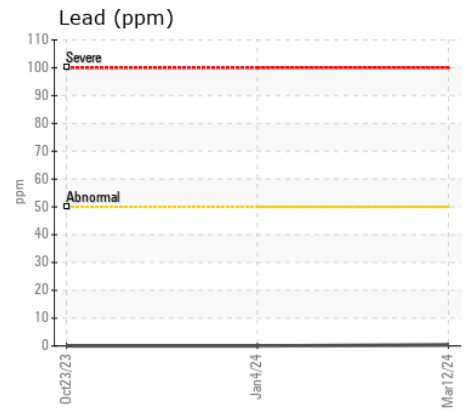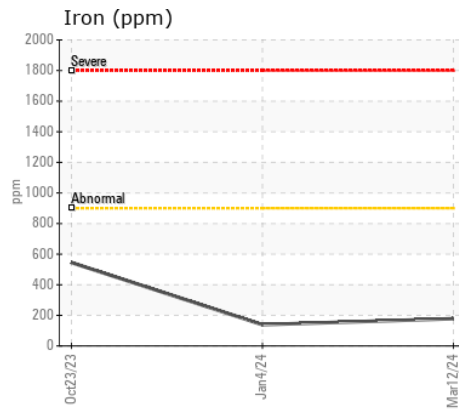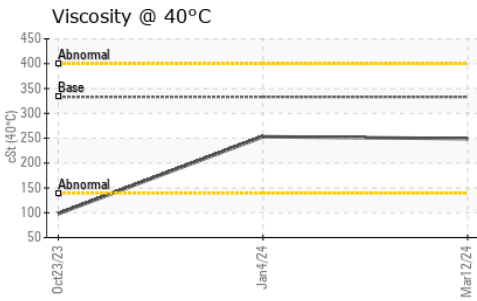

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP444328
Lab Number : 06124082
Unique Number : 10938233
Test Package : MOB 1

Received : 20 Mar 2024
Tested : 21 Mar 2024
Diagnosed : 21 Mar 2024 - Wes Davis

BLUE GOOSE GROWERS
 16059 W ORANGE AVE
 FT PIERCE, FL
 US 34945
 Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (772)461-3020

F: