



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION

Machine Id  
**AT1169**  
Component  
**Front Left Final Drive**  
Fluid  
**SHELL OMALA S4 G (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

## WEAR

All component wear rates are normal.





## CONTAMINATION

There is no indication of any contamination in the oil.

## FLUID CONDITION

The oil viscosity is lower than normal. Confirm oil type.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0921986	---	---
Sample Date		Client Info		14 Mar 2024	---	---
Machine Age	hrs	Client Info		4031	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ATTENTION	---	---
Iron	ppm	ASTM D5185m	>500	326	---	---
Chromium	ppm	ASTM D5185m	>10	4	---	---
Nickel	ppm	ASTM D5185m	>10	2	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	2	---	---
Lead	ppm	ASTM D5185m	>25	<1	---	---
Copper	ppm	ASTM D5185m	>50	9	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Silicon	ppm	ASTM D5185m	>75	13	---	---
Potassium	ppm	ASTM D5185m	>20	1	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	LIGHT	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m		14	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		1	---	---
Manganese	ppm	ASTM D5185m		3	---	---
Magnesium	ppm	ASTM D5185m		3	---	---
Calcium	ppm	ASTM D5185m		69	---	---
Phosphorus	ppm	ASTM D5185m		334	---	---
Zinc	ppm	ASTM D5185m		68	---	---
Sulfur	ppm	ASTM D5185m		4816	---	---
Visc @ 40°C	cSt	ASTM D445		153	---	---

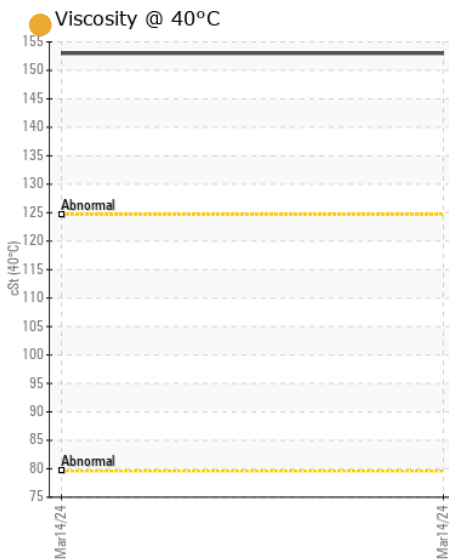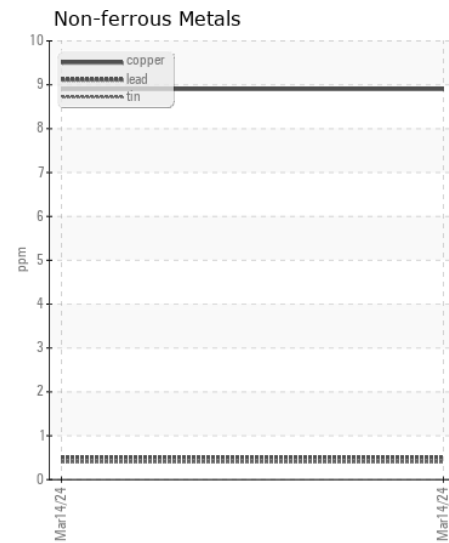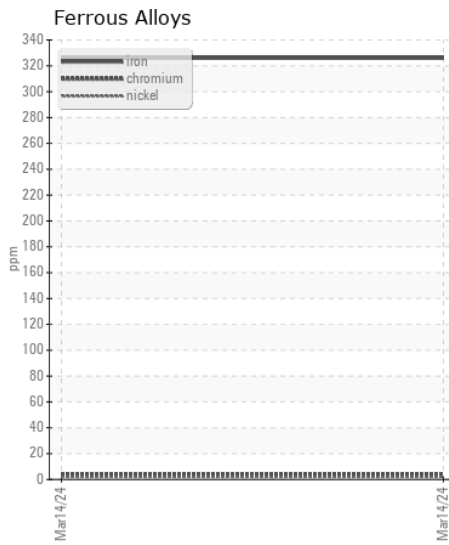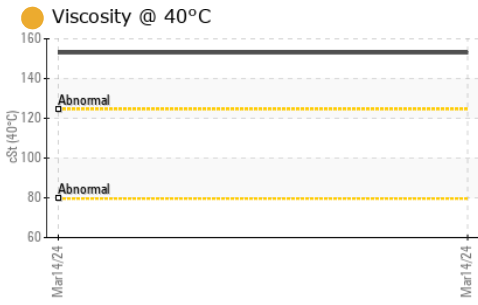

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0921986  
**Lab Number** : 06124098  
**Unique Number** : 10938249  
**Test Package** : CONST

**Received** : 20 Mar 2024  
**Tested** : 21 Mar 2024  
**Diagnosed** : 23 Mar 2024 - Don Baldrige

**MAY HEAVY EQUIPMENT / National Equipment Dealers**  
 555 WISE RD  
 CLAYTON, NC  
 US 27528

Contact: SCOTT WOODY  
 swoody@nedealers.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
 F: (919)773-1425