



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**JOHN DEERE 132**  
 Component  
**Diesel Engine**  
 Fluid  
**MOBIL 15W40 (--- QTS)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0189761</b>	JR0189724	JR0135321
Sample Date		Client Info		<b>08 Mar 2024</b>	09 Jan 2024	26 Sep 2023
Machine Age	hrs	Client Info		<b>3500</b>	3000	2500
Oil Age	hrs	Client Info		<b>500</b>	500	500
Filter Age	hrs	Client Info		<b>500</b>	500	500
Oil Changed		Client Info		<b>Changed</b>	Changed	N/A
Filter Changed		Client Info		<b>Changed</b>	Changed	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	<b>8</b>	8	15
Chromium	ppm	ASTM D5185m	>11	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	<1	2
Titanium	ppm	ASTM D5185m		<b>0</b>	0	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>31	<b>1</b>	2	3
Lead	ppm	ASTM D5185m	>26	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>26	<b>&lt;1</b>	<1	2
Tin	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	<b>4</b>	4	4
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	4	9
Fuel		WC Method	>2.1	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.21	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.2</b>	0.3	0.7
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.3</b>	7.5	8.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.6</b>	21.3	19.8
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>118	<b>2</b>	2	<1
Boron	ppm	ASTM D5185m		<b>40</b>	30	2
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>39</b>	37	55
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m		<b>520</b>	538	831
Calcium	ppm	ASTM D5185m		<b>1653</b>	1530	1274
Phosphorus	ppm	ASTM D5185m		<b>946</b>	949	984
Zinc	ppm	ASTM D5185m		<b>1131</b>	1065	1228
Sulfur	ppm	ASTM D5185m		<b>3429</b>	2840	3874
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>20.0</b>	19.3	14.3
Base Number (BN)	mg KOH/g	ASTM D2896		<b>9.9</b>	8.8	9.2
Visc @ 100°C	cSt	ASTM D445		<b>12.4</b>	12.5	13.3

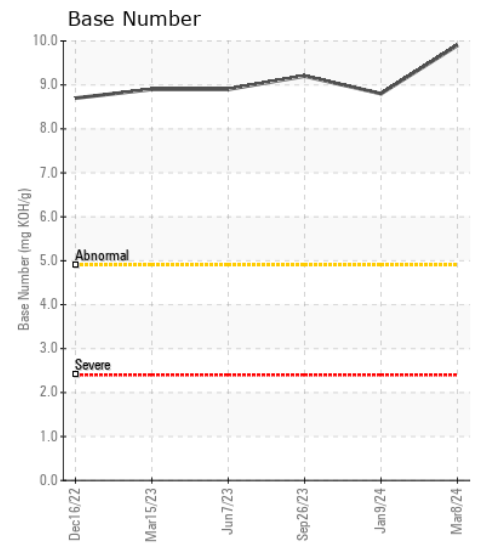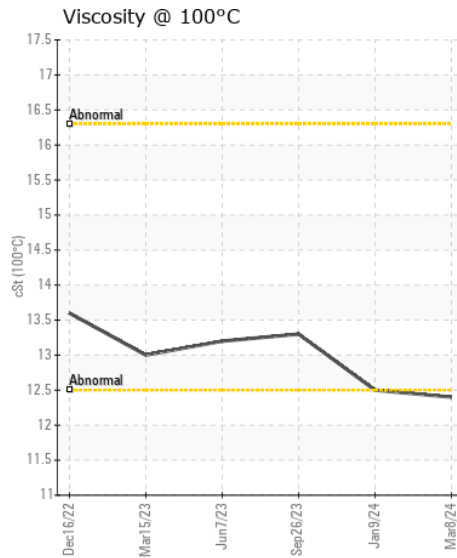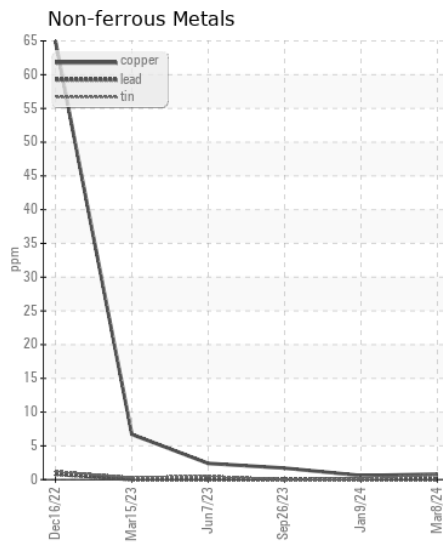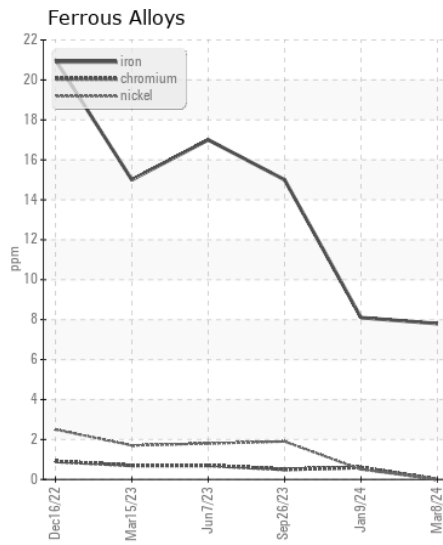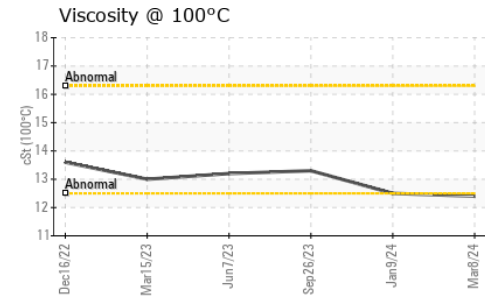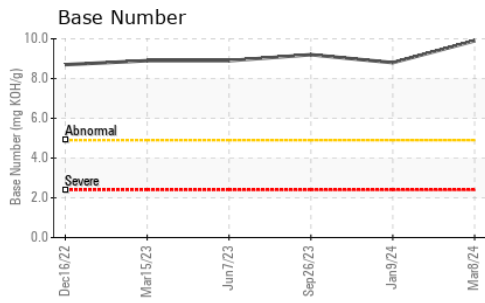

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0189761 **Received** : 20 Mar 2024  
**Lab Number** : 06124139 **Tested** : 21 Mar 2024  
**Unique Number** : 10938290 **Diagnosed** : 21 Mar 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: TBN )

**THE SCOTTS COMPANY**  
 3175 BRIGHT LEAF RD  
 LAWRENCEVILLE, VA  
 US 23868  
 Contact: REX WATSON

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (434)848-2727

F: (434)848-2250