



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
9219639
Component
Diesel Engine
Fluid
{not provided} (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		IL0030994	IL0034830	IL05390497
Sample Date		Client Info		13 Mar 2024	21 Dec 2023	26 Aug 2021
Machine Age	mls	Client Info		192814	177809	37436
Oil Age	mls	Client Info		0	0	37436
Filter Age	mls	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	15	8	16
Chromium	ppm	ASTM D5185m	>20	1	<1	1
Nickel	ppm	ASTM D5185m	>4	0	<1	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>3	0	<1	0
Aluminum	ppm	ASTM D5185m	>20	8	3	14
Lead	ppm	ASTM D5185m	>40	<1	<1	5
Copper	ppm	ASTM D5185m	>330	1	1	15
Tin	ppm	ASTM D5185m	>15	1	<1	2
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	7	7	13
Potassium	ppm	ASTM D5185m	>20	22	7	45
Fuel	%	ASTM D3524	>5	<1.0	<1.0	0.4
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.3	0.2	0.2
Nitration	Abs/cm	*ASTM D7624	>20	8.7	7.2	8.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.1	22.0	19.7
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		3	2	2
Boron	ppm	ASTM D5185m		28	36	38
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		41	39	35
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		503	510	654
Calcium	ppm	ASTM D5185m		1609	1553	1627
Phosphorus	ppm	ASTM D5185m		734	739	839
Zinc	ppm	ASTM D5185m		883	889	949
Sulfur	ppm	ASTM D5185m		2668	2332	2760
Oxidation	Abs/.1mm	*ASTM D7414	>25	21.7	20.4	15.3
Base Number (BN)	mg KOH/g	ASTM D2896		7.7	9.2	8
Visc @ 100°C	cSt	ASTM D445		10.9	10.6	11.3

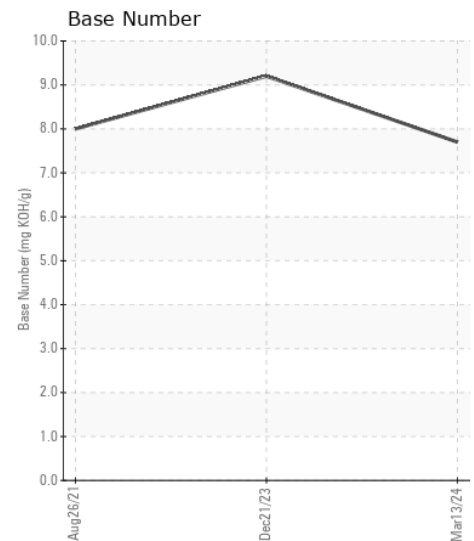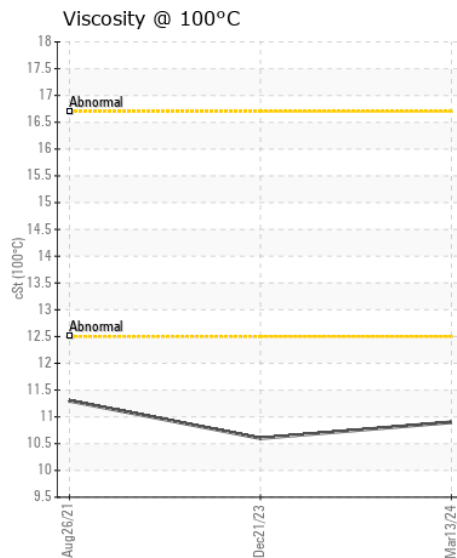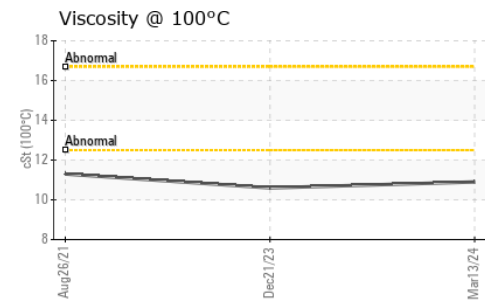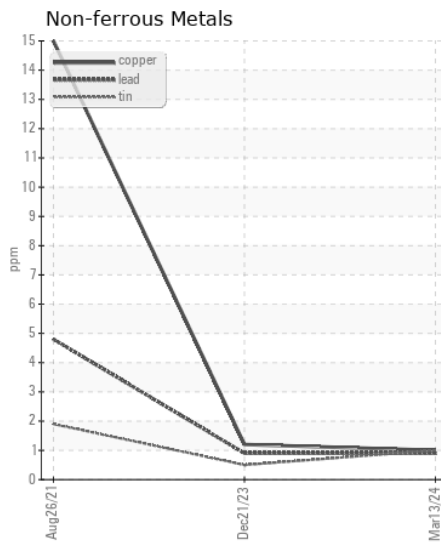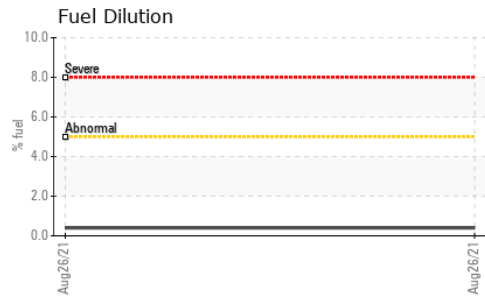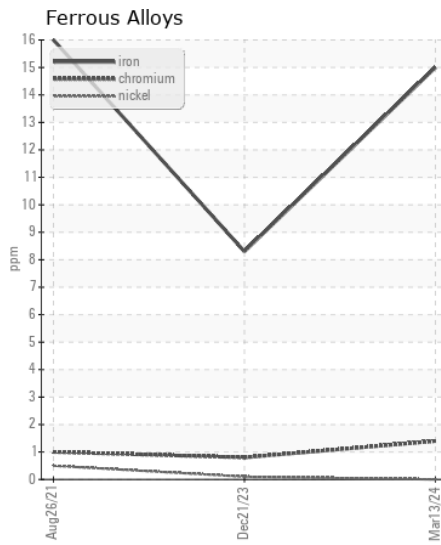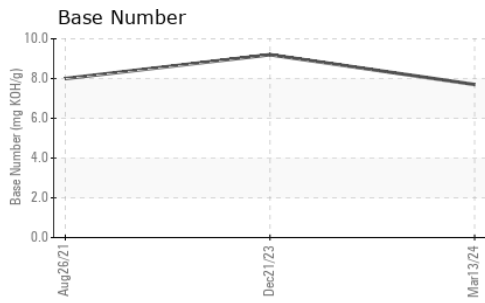

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : IL0030994 **Received** : 20 Mar 2024
Lab Number : 06124148 **Tested** : 21 Mar 2024
Unique Number : 10938299 **Diagnosed** : 21 Mar 2024 - Jonathan Hester
Test Package : FLEET (Additional Tests: FuelDilution)

IDEALRELEASE OF ATLANTA - FULTON
 4675 BAKERS FERRY ROAD
 ATLANTA, GA
 US 30331

Contact: DAVID JOHNS
 davidjohns@idealease.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (404)699-5571
 F: (404)699-7420