



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Machine Id
2021 BG 28 H 4160332
 Component
Hydraulic System
 Fluid
CASTROL HYSPIN DHV 46 (264 GAL)

RECOMMENDATION

The filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0688067	---	---
Sample Date		Client Info		18 Mar 2024	---	---
Machine Age	hrs	Client Info		5003	---	---
Oil Age	hrs	Client Info		5003	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ABNORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>20	7	---	---
Chromium	ppm	ASTM D5185m	>10	0	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>10	0	---	---
Lead	ppm	ASTM D5185m	>10	1	---	---
Copper	ppm	ASTM D5185m	>75	3	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION










There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Silicon	ppm	ASTM D5185m	>20	1	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Water		WC Method	>0.1	NEG	---	---
Particles >4µm		ASTM D7647	>5000	▲ 26819	---	---
Particles >6µm		ASTM D7647	>1300	▲ 3236	---	---
Particles >14µm		ASTM D7647	>160	78	---	---
Particles >21µm		ASTM D7647	>40	18	---	---
Particles >38µm		ASTM D7647	>10	1	---	---
Particles >71µm		ASTM D7647	>3	0	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	▲ 22/19/13	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

Sodium	ppm	ASTM D5185m		4	---	---
Boron	ppm	ASTM D5185m		<1	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		0	---	---
Manganese	ppm	ASTM D5185m		0	---	---
Magnesium	ppm	ASTM D5185m		3	---	---
Calcium	ppm	ASTM D5185m		42	---	---
Phosphorus	ppm	ASTM D5185m		146	---	---
Zinc	ppm	ASTM D5185m		27	---	---
Sulfur	ppm	ASTM D5185m		2928	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045	0.15	0.09	---	---
Visc @ 40°C	cSt	ASTM D445	46.0	42.6	---	---

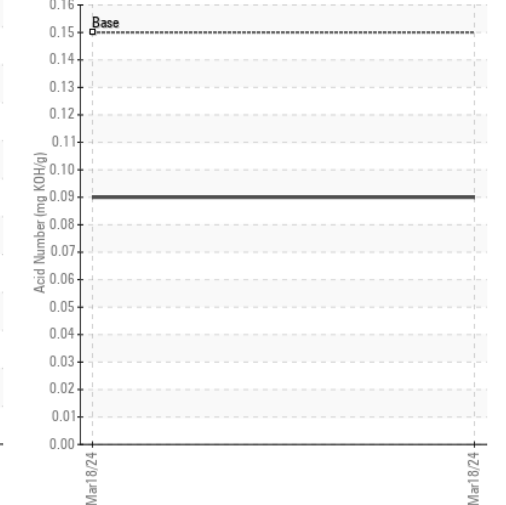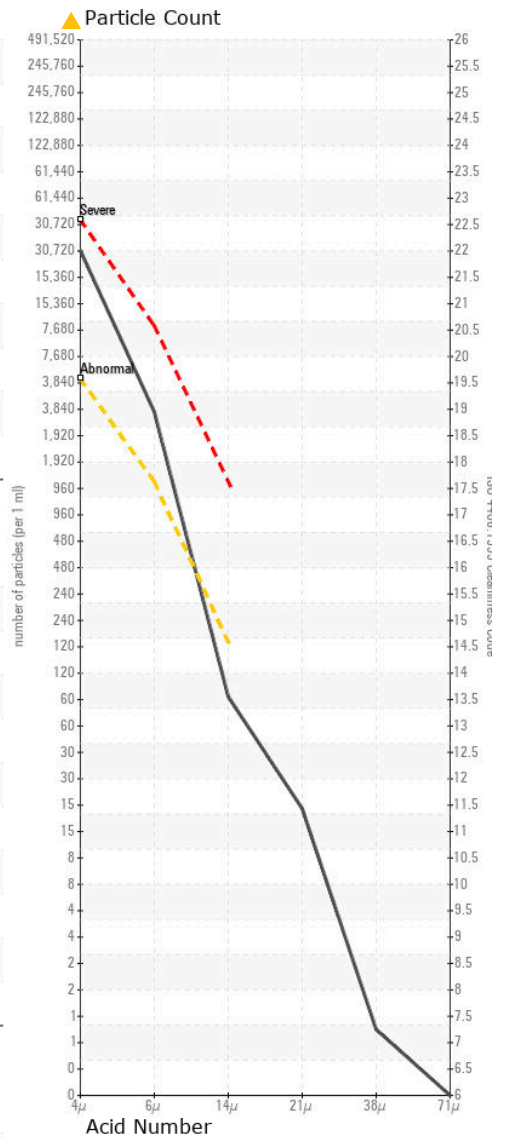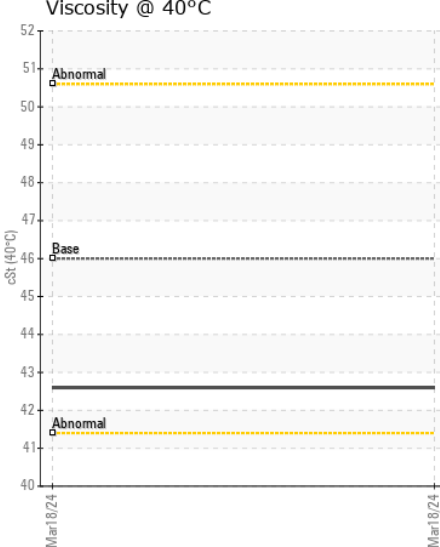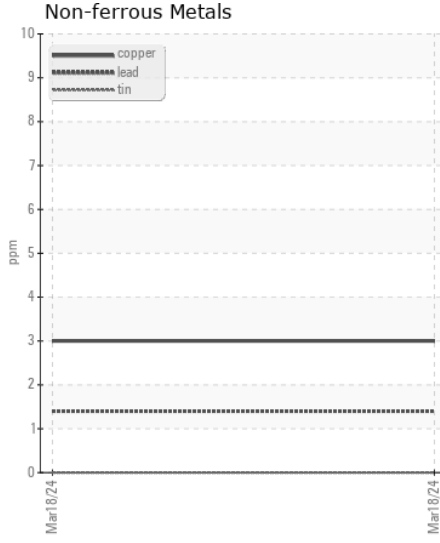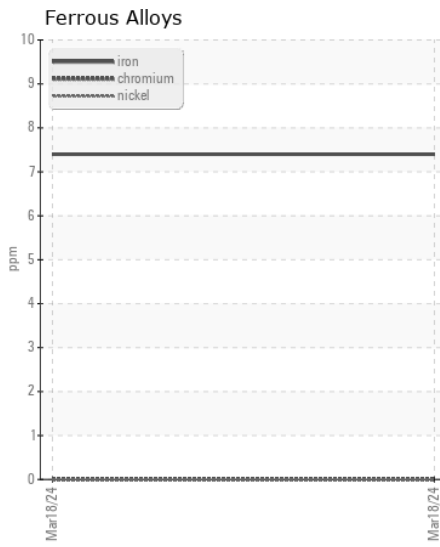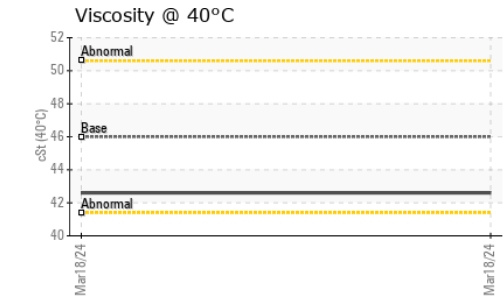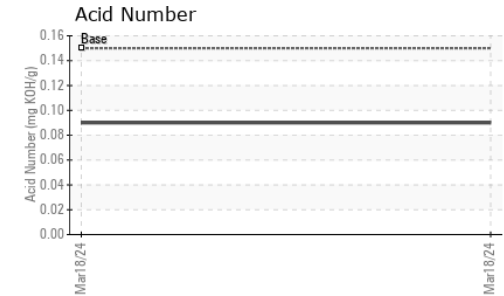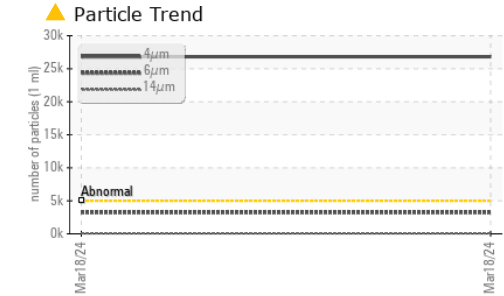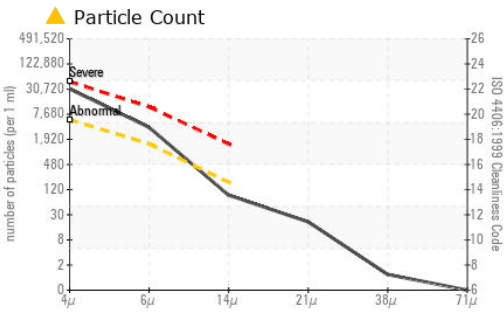

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0688067
Lab Number : 06124280
Unique Number : 10938431
Test Package : CONST

Received : 20 Mar 2024
Tested : 21 Mar 2024
Diagnosed : 21 Mar 2024 - Wes Davis

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

KELLER - NORTH AMERICA
 510 NINE NORTH COURT
 ALPHARETTA, GA
 US 30004-2961
 Contact: SHOP MANAGER
 SRLEWIS@KELLER-NA.COM
 T: (770)442-1801
 F: (770)442-8344