



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION



Area
[W05004101]
 Machine Id
VOLVO A45G 342679
 Component
Rear Axle
 Fluid
GEAR OIL SAE 80W140 (10 GAL)

RECOMMENDATION

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. (Customer Sample Comment: W05004101)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0886330	VCP362960	---
Sample Date		Client Info		19 Mar 2024	09 May 2022	---
Machine Age	hrs	Client Info		8663	4641	---
Oil Age	hrs	Client Info		2000	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				ATTENTION	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>900	69	196	---
Chromium	ppm	ASTM D5185m	>20	0	3	---
Nickel	ppm	ASTM D5185m	>10	0	<1	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>30	0	<1	---
Lead	ppm	ASTM D5185m	>50	0	0	---
Copper	ppm	ASTM D5185m	>150	<1	3	---
Tin	ppm	ASTM D5185m	>20	0	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	<1	4	---
Potassium	ppm	ASTM D5185m	>20	0	0	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The oil viscosity is lower than normal. Confirm oil type.

Sodium	ppm	ASTM D5185m		0	1	---
Boron	ppm	ASTM D5185m	400	272	198	---
Barium	ppm	ASTM D5185m	200	0	0	---
Molybdenum	ppm	ASTM D5185m	12	0	4	---
Manganese	ppm	ASTM D5185m		<1	6	---
Magnesium	ppm	ASTM D5185m	12	<1	0	---
Calcium	ppm	ASTM D5185m	150	30	112	---
Phosphorus	ppm	ASTM D5185m	1650	2348	1123	---
Zinc	ppm	ASTM D5185m	125	10	27	---
Sulfur	ppm	ASTM D5185m	22500	33011	25056	---
Visc @ 40°C	cSt	ASTM D445	263	58.9	290	---

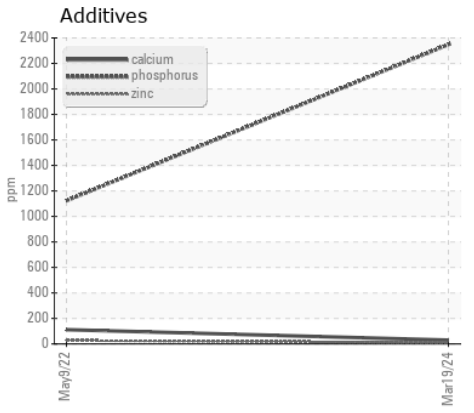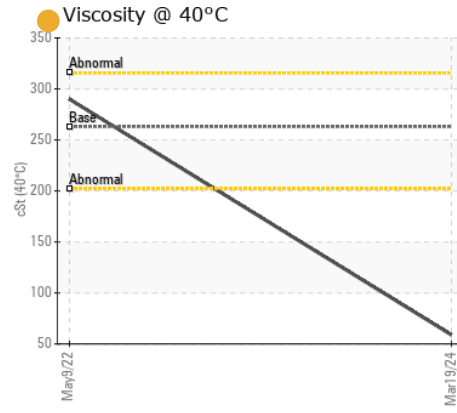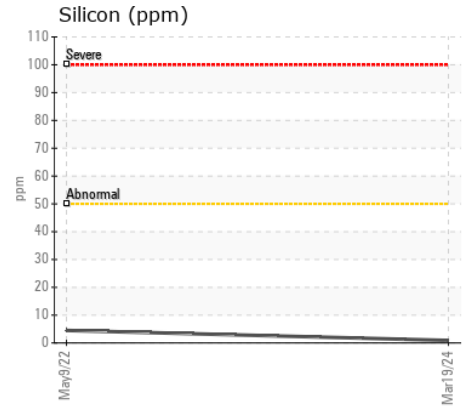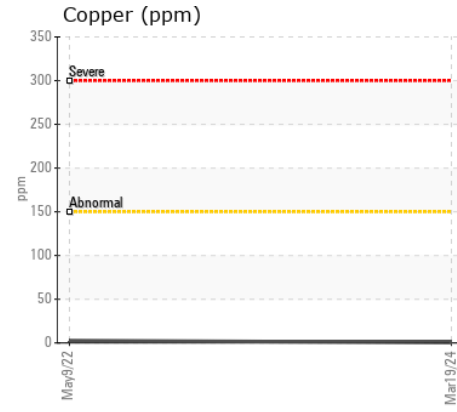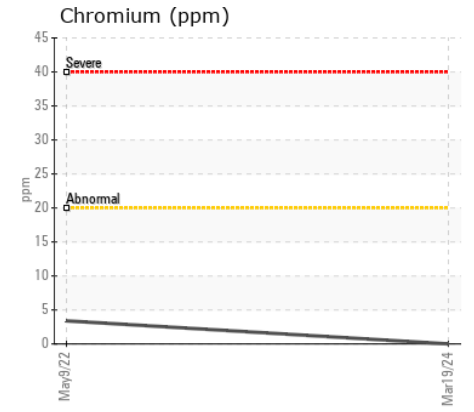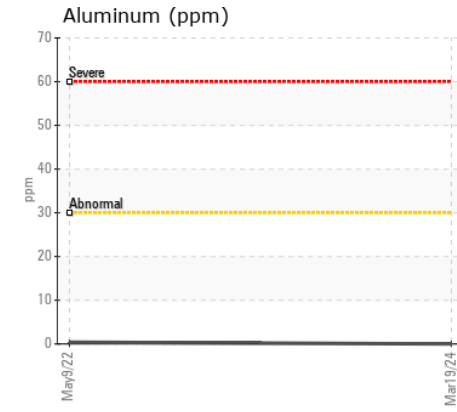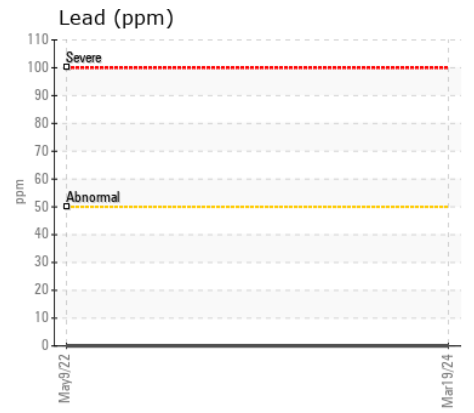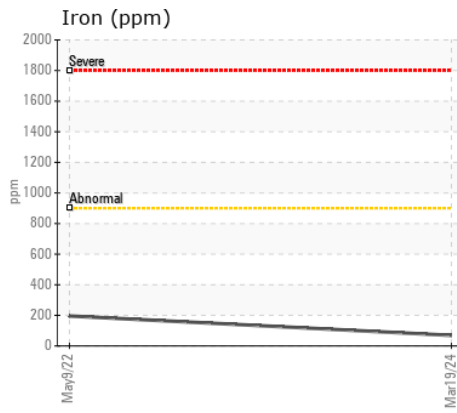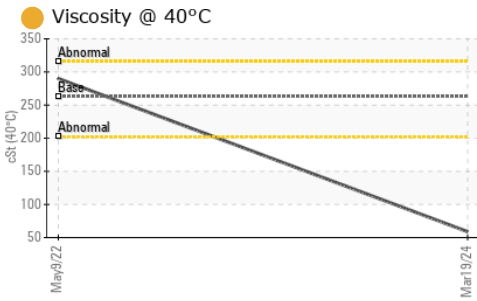

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0886330
Lab Number : 06124426
Unique Number : 10938577
Test Package : MOBCE

Received : 20 Mar 2024
Tested : 21 Mar 2024
Diagnosed : 23 Mar 2024 - Don Baldrige

MCCLUNG-LOGAN EQUIPMENT CO - MANASSAS
 8450 QUARRY ROAD
 MANASSAS, VA
 US 20110
 Contact: MIKE MAYHUGH
 MMAYHUGH@MCCLUNG-LOGAN.COM
 T: (703)393-7344
 F: (703)393-7844

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)