



McCLUNG-LOGAN
EQUIPMENT COMPANY, INC.

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[W05004118]
Machine Id
VOLVO A40G 341427
Component
Transmission (Auto)
Fluid
VOLVO AT 102 (11 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: W05004118)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ML0000397	VCP250112	VCP223508
Sample Date		Client Info		19 Mar 2024	24 Aug 2019	16 Dec 2018
Machine Age	hrs	Client Info		11295	4048	3008
Oil Age	hrs	Client Info		2000	0	0
Filter Age	hrs	Client Info		1000	0	0
Oil Changed		Client Info		Changed	Changed	N/A
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>160	15	47	42
Chromium	ppm	ASTM D5185m	>5	0	<1	0
Nickel	ppm	ASTM D5185m	>5	0	2	1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>5	0	0	0
Aluminum	ppm	ASTM D5185m	>50	2	13	9
Lead	ppm	ASTM D5185m	>50	0	0	0
Copper	ppm	ASTM D5185m	>225	2	12	11
Tin	ppm	ASTM D5185m	>10	0	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	2	4	8
Potassium	ppm	ASTM D5185m	>20	0	0	3
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		1	3	3
Boron	ppm	ASTM D5185m	187	94	81	73
Barium	ppm	ASTM D5185m	0.0	0	0	0
Molybdenum	ppm	ASTM D5185m	0.0	0	0	0
Manganese	ppm	ASTM D5185m	0.0	0	1	2
Magnesium	ppm	ASTM D5185m	6.8	0	<1	0
Calcium	ppm	ASTM D5185m	215	74	94	80
Phosphorus	ppm	ASTM D5185m	445	205	182	148
Zinc	ppm	ASTM D5185m	56	0	6	0
Sulfur	ppm	ASTM D5185m	1336	2471	2654	1812
Visc @ 40°C	cSt	ASTM D445	35.3	29.6	28.2	26.61

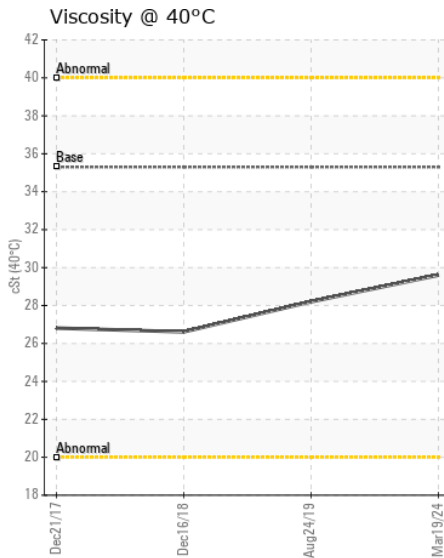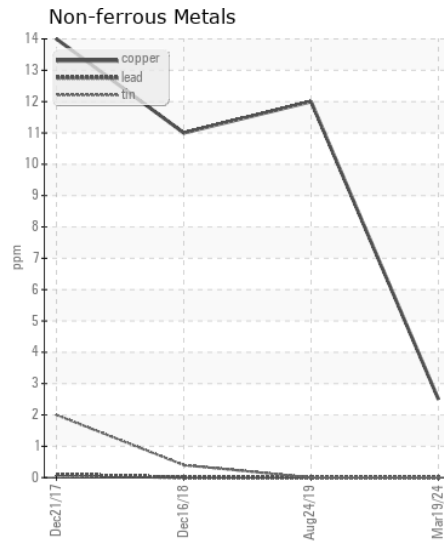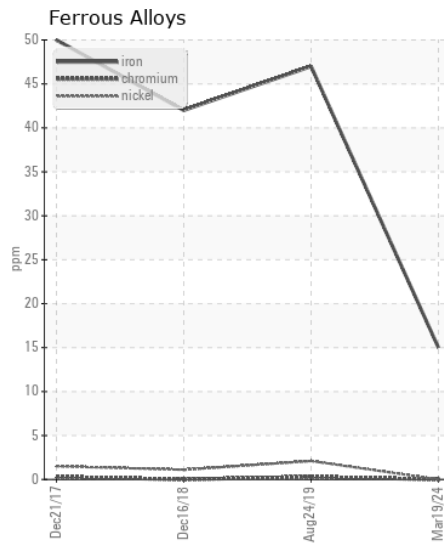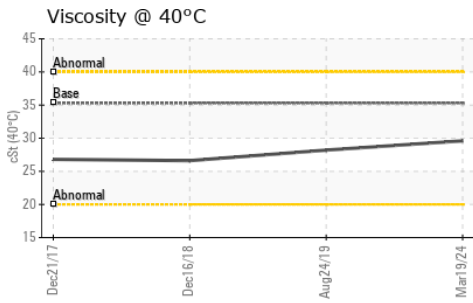

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ML0000397
Lab Number : 06124436
Unique Number : 10938587
Test Package : CONST

Received : 20 Mar 2024
Tested : 21 Mar 2024
Diagnosed : 23 Mar 2024 - Don Baldrige

MCCLUNG-LOGAN EQUIPMENT CO - MANASSAS
 8450 QUARRY ROAD
 MANASSAS, VA
 US 20110
 Contact: MIKE MAYHUGH
 MMAYHUGH@MCCLUNG-LOGAN.COM
 T: (703)393-7344
 F: (703)393-7844

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)