



PacLease

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	ABNORMAL

Machine Id
1XPCD9X2LD730806

Component
Diesel Engine

Fluid
{not provided} (--- LTR)

RECOMMENDATION

We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RPL06124502	---	---
Sample Date		Client Info		04 Mar 2024	---	---
Machine Age	mls	Client Info		49845	---	---
Oil Age	mls	Client Info		0	---	---
Filter Age	mls	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ABNORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	26	---	---
Chromium	ppm	ASTM D5185m	>20	<1	---	---
Nickel	ppm	ASTM D5185m	>4	0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>3	<1	---	---
Aluminum	ppm	ASTM D5185m	>20	5	---	---
Lead	ppm	ASTM D5185m	>40	<1	---	---
Copper	ppm	ASTM D5185m	>330	2	---	---
Tin	ppm	ASTM D5185m	>15	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION








Sodium and/or potassium levels are high.

Silicon	ppm	ASTM D5185m	>25	12	---	---
Potassium	ppm	ASTM D5185m	>20	▲ 78	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol	%	*ASTM D2982		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.7	---	---
Nitration	Abs/cm	*ASTM D7624	>20	11.8	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	28.6	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil.

Sodium	ppm	ASTM D5185m		▲ 132	---	---
Boron	ppm	ASTM D5185m		36	---	---
Barium	ppm	ASTM D5185m		2	---	---
Molybdenum	ppm	ASTM D5185m		149	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		589	---	---
Calcium	ppm	ASTM D5185m		1385	---	---
Phosphorus	ppm	ASTM D5185m		829	---	---
Zinc	ppm	ASTM D5185m		1047	---	---
Sulfur	ppm	ASTM D5185m		2519	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	26.6	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		4.4	---	---
Visc @ 100°C	cSt	ASTM D445		14.8	---	---

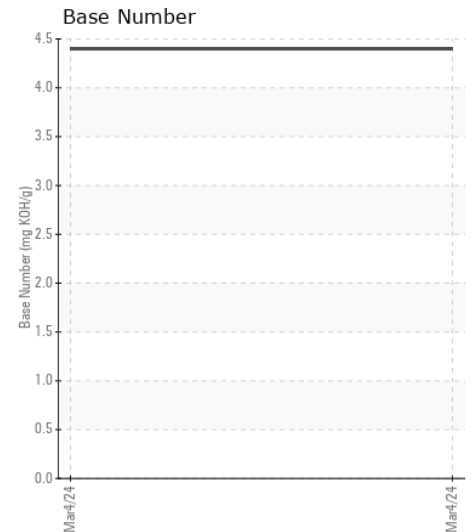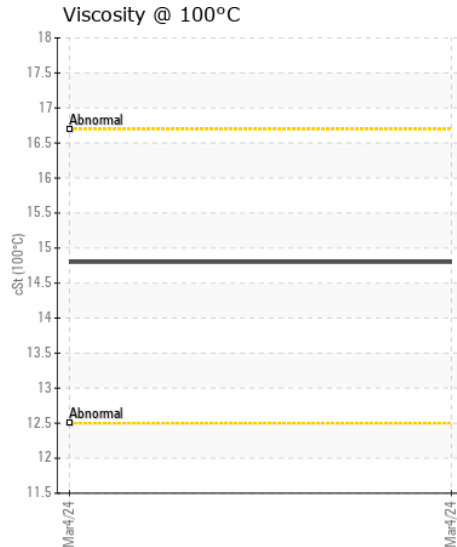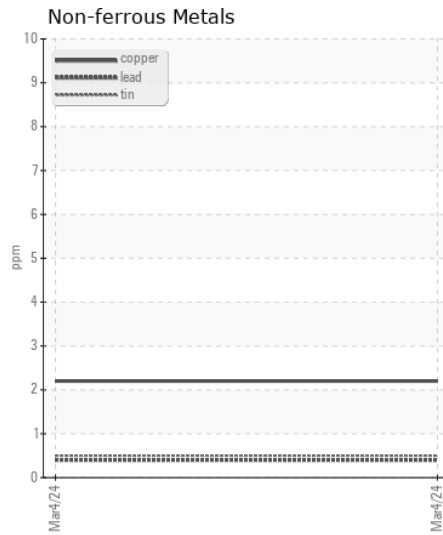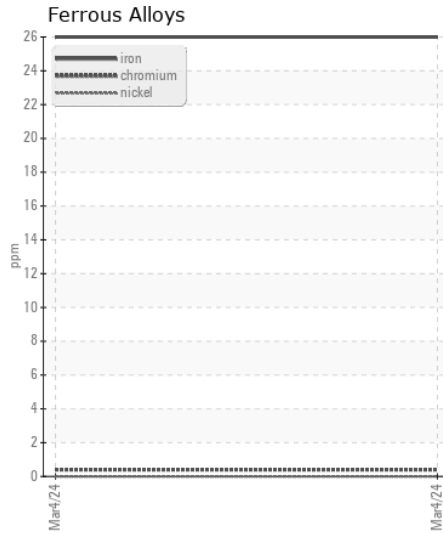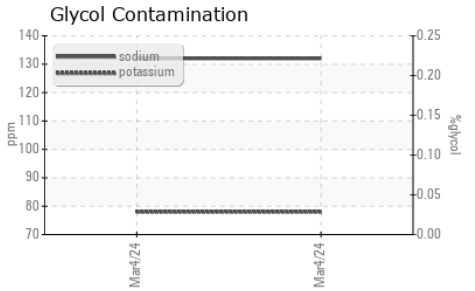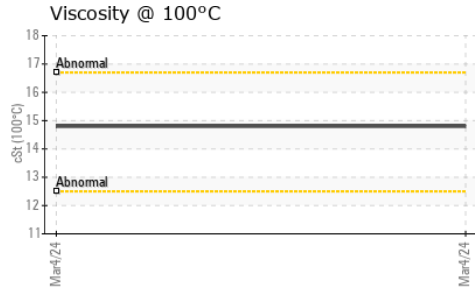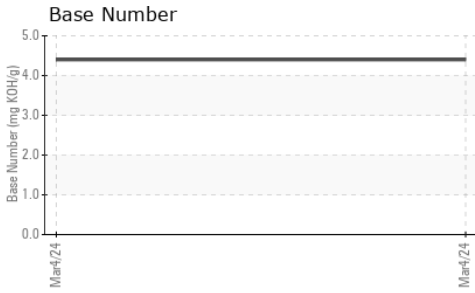

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : RPL06124502

Lab Number : 06124502

Unique Number : 10938653

Test Package : FLEET (Additional Tests: Glycol)

Received : 21 Mar 2024

Tested : 26 Mar 2024

Diagnosed : 26 Mar 2024 - Jonathan Hester

RTL PACLEASE - 7050 -Leasing Tyler

10791 Hwy 69 North

Tyler, TX

US 75706

Contact: Justin Cooper

CooperJ1@RushEnterprises.Com

T: (903)405-3000

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)