



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**JOHN DEERE 250G 1FF250GXKNF611855**

Component  
**Hydraulic System**

Fluid  
**{not provided} (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0203476</b>	JR0193324	---
Sample Date		Client Info		<b>19 Mar 2024</b>	21 Nov 2023	---
Machine Age	hrs	Client Info		<b>993</b>	586	---
Oil Age	hrs	Client Info		<b>993</b>	586	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Changed</b>	Not Changd	---
Filter Changed		Client Info		<b>Changed</b>	Not Changd	---
Sample Status				<b>NORMAL</b>	NORMAL	---

### WEAR

All component wear rates are normal.

PQ		ASTM D8184	>50	<b>15</b>	9	---
Iron	ppm	ASTM D5185m	>32	<b>2</b>	2	---
Chromium	ppm	ASTM D5185m	>9	<b>&lt;1</b>	0	---
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m		<b>0</b>	0	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>9	<b>0</b>	1	---
Lead	ppm	ASTM D5185m	>28	<b>0</b>	0	---
Copper	ppm	ASTM D5185m	>50	<b>2</b>	2	---
Tin	ppm	ASTM D5185m	>5	<b>&lt;1</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

### CONTAMINATION











The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>11	<b>&lt;1</b>	<1	---
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	1	---
Water		WC Method	>0.075	<b>NEG</b>	NEG	---
Particles >4µm		ASTM D7647	>80000	<b>2759</b>	2882	---
Particles >6µm		ASTM D7647	>20000	<b>681</b>	687	---
Particles >14µm		ASTM D7647	>640	<b>119</b>	57	---
Particles >21µm		ASTM D7647	>160	<b>47</b>	15	---
Particles >38µm		ASTM D7647	>40	<b>1</b>	1	---
Particles >71µm		ASTM D7647	>10	<b>0</b>	0	---
Oil Cleanliness		ISO 4406 (c)	>23/21/16	<b>19/17/14</b>	19/17/13	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.075	<b>NEG</b>	NEG	---

### FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>21	<b>1</b>	0	---
Boron	ppm	ASTM D5185m		<b>0</b>	<1	---
Barium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Magnesium	ppm	ASTM D5185m		<b>0</b>	3	---
Calcium	ppm	ASTM D5185m		<b>2</b>	10	---
Phosphorus	ppm	ASTM D5185m		<b>511</b>	471	---
Zinc	ppm	ASTM D5185m		<b>25</b>	19	---
Sulfur	ppm	ASTM D5185m		<b>76</b>	68	---
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.33</b>	0.16	---
Visc @ 40°C	cSt	ASTM D445		<b>47.3</b>	47.4	---

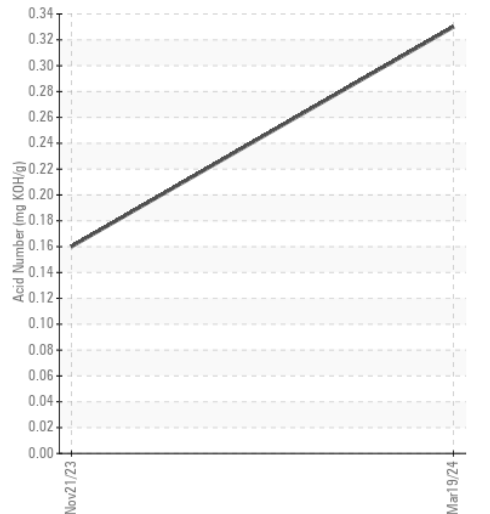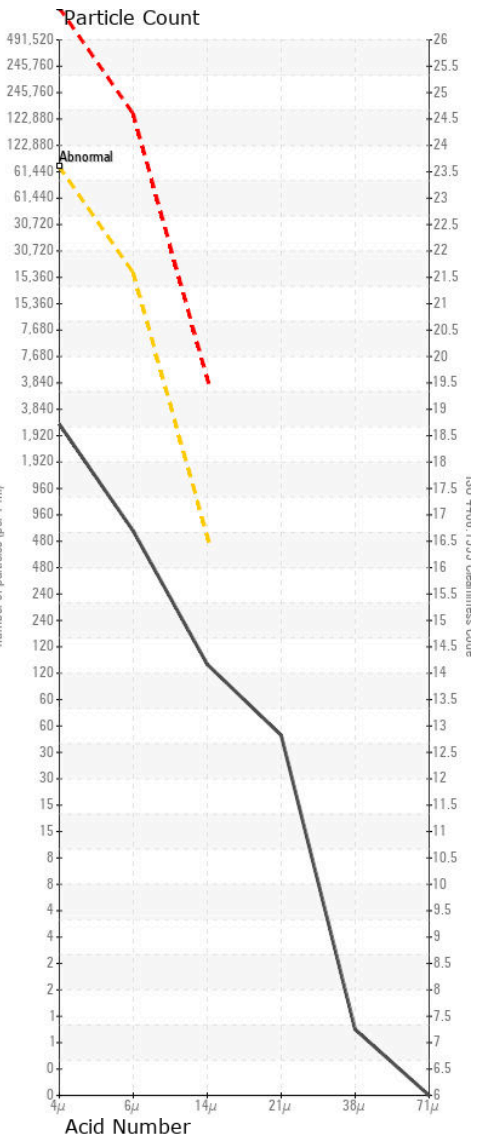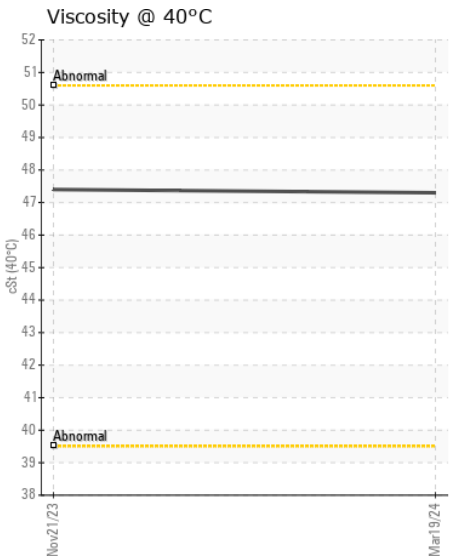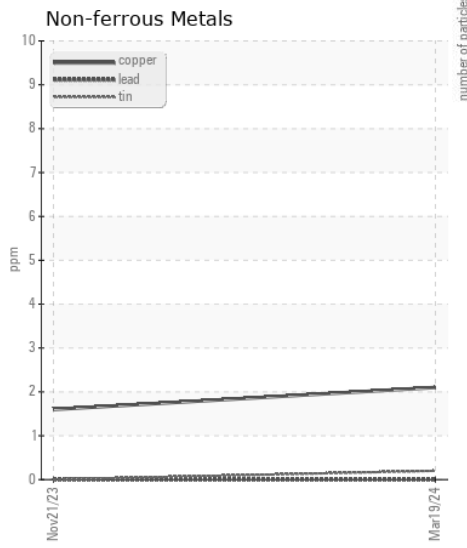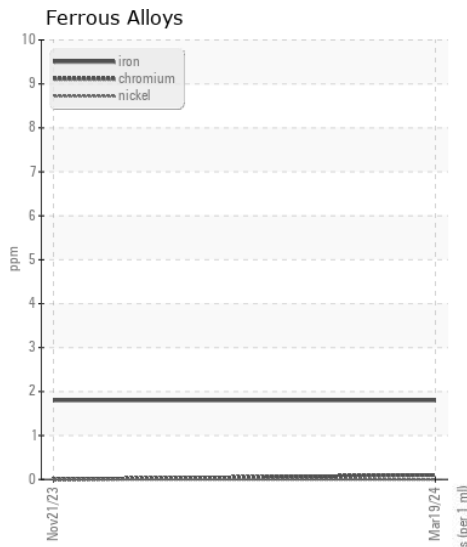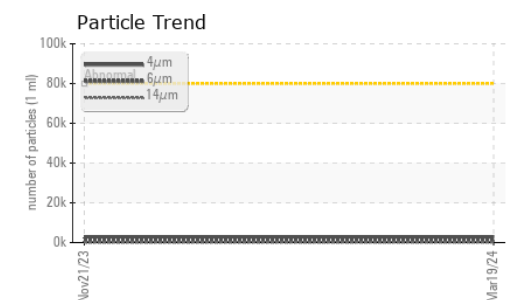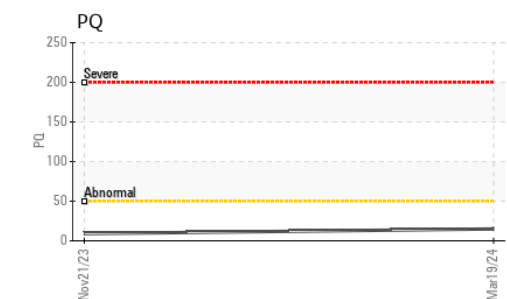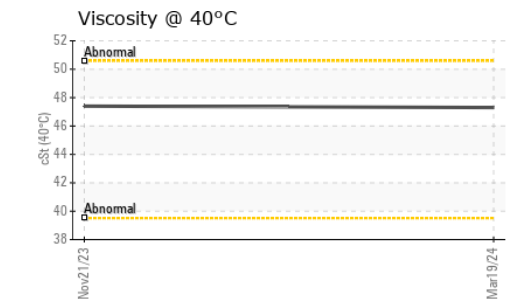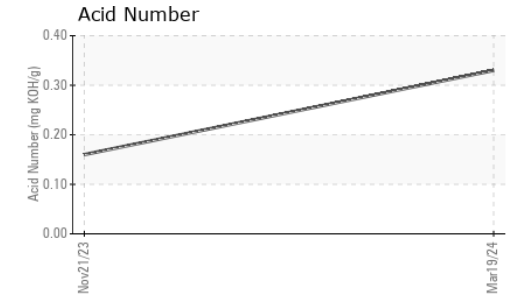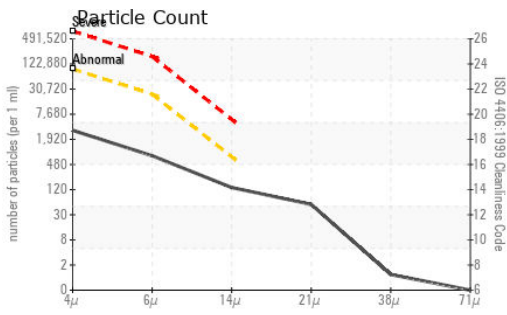

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0203476 **Received** : 21 Mar 2024  
**Lab Number** : 06124783 **Tested** : 22 Mar 2024  
**Unique Number** : 10938934 **Diagnosed** : 22 Mar 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: PQ )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**CARLTON'S BACKHOE**  
 9550 STATESVILLE ROAD  
 CHARLOTTE, NC  
 US 28269  
 Contact: LEO

T: (704)547-0211

F: