



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 250G 1FF250GXKNF611855

Component
Propel Drive Gearbox

Fluid
NOT GIVEN (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0203428	JR0192539	---
Sample Date		Client Info		19 Mar 2024	21 Nov 2023	---
Machine Age	hrs	Client Info		993	586	---
Oil Age	hrs	Client Info		993	586	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Not Changd	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		15	14	---
Iron	ppm	ASTM D5185m	>200	43	34	---
Chromium	ppm	ASTM D5185m	>10	<1	<1	---
Nickel	ppm	ASTM D5185m	>10	0	0	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m		<1	0	---
Aluminum	ppm	ASTM D5185m		3	2	---
Lead	ppm	ASTM D5185m		0	0	---
Copper	ppm	ASTM D5185m		2	1	---
Tin	ppm	ASTM D5185m		<1	<1	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION






There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m		15	12	---
Potassium	ppm	ASTM D5185m	>20	4	1	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<1	4	---
Boron	ppm	ASTM D5185m		58	58	---
Barium	ppm	ASTM D5185m		10	5	---
Molybdenum	ppm	ASTM D5185m		110	100	---
Manganese	ppm	ASTM D5185m		2	2	---
Magnesium	ppm	ASTM D5185m		17	20	---
Calcium	ppm	ASTM D5185m		4257	3931	---
Phosphorus	ppm	ASTM D5185m		1156	1155	---
Zinc	ppm	ASTM D5185m		1361	1338	---
Sulfur	ppm	ASTM D5185m		9746	8357	---
Visc @ 40°C	cSt	ASTM D445		61.3	60.6	---

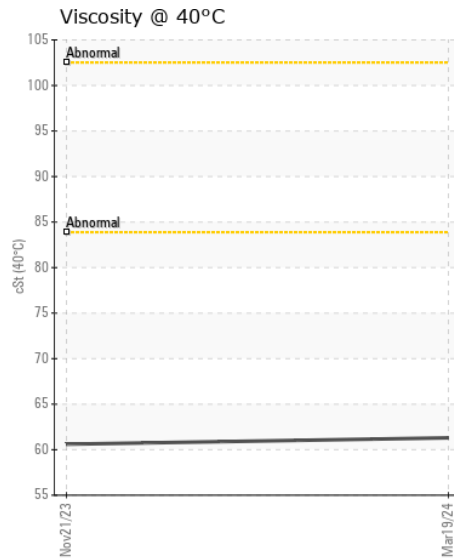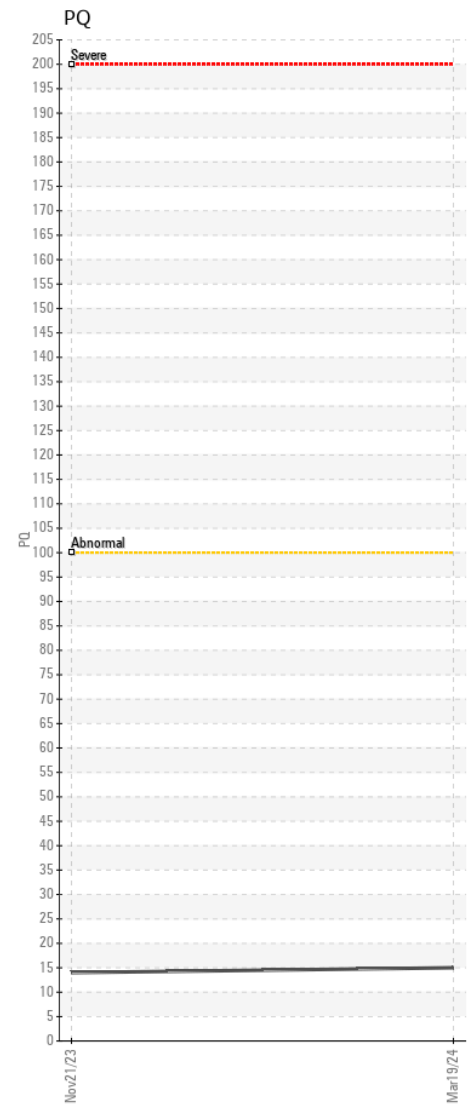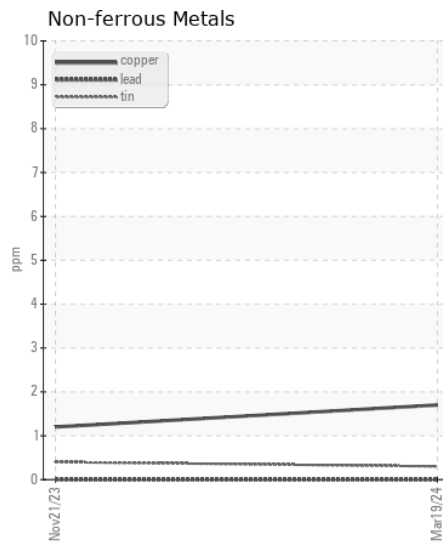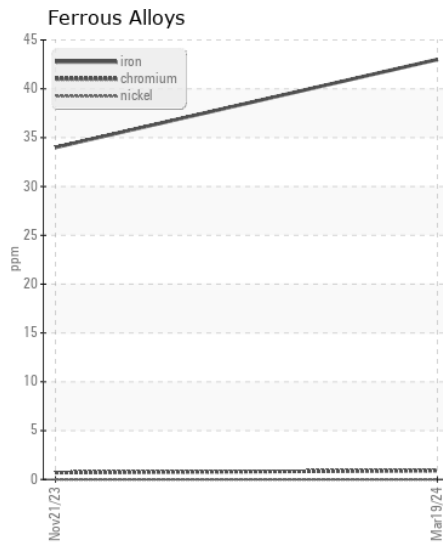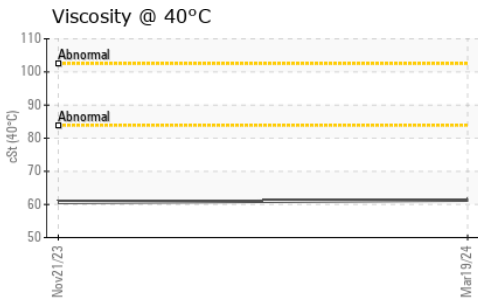

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0203428 **Received** : 21 Mar 2024
Lab Number : 06125158 **Tested** : 24 Mar 2024
Unique Number : 10939309 **Diagnosed** : 24 Mar 2024 - Wes Davis
Test Package : CONST (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

CARLTON'S BACKHOE
 9550 STATESVILLE ROAD
 CHARLOTTE, NC
 US 28269
 Contact: LEO

T: (704)547-0211

F: