



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**AMR-Sedalia**  
 Machine Id  
**567149 LIEBHERR LH50 124549**  
 Component  
**Rear Differential**  
 Fluid  
**LIEBHERR GEAR BASIC 90 LS (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>DJJ0018457</b>	DJJ0018636	DJJ0019058
Sample Date		Client Info		<b>15 Mar 2024</b>	14 Nov 2023	14 Jul 2023
Machine Age	hrs	Client Info		<b>4584</b>	4066	3531
Oil Age	hrs	Client Info		<b>500</b>	1000	500
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Chngd</b>	Changed	Not Chngd
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	<b>27</b>	143	10
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>3</b>	3	0
Lead	ppm	ASTM D5185m	>25	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>100	<b>10</b>	10	9
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	MODER
Yellow Metal	scalar	*Visual	NONE	<b>MODER</b>	NONE	NONE

## CONTAMINATION





There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>75	<b>4</b>	31	2
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	2	0
Water		WC Method	>.2	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>1</b>	0	1
Boron	ppm	ASTM D5185m	0	<b>0</b>	2	3
Barium	ppm	ASTM D5185m	0	<b>1</b>	0	0
Molybdenum	ppm	ASTM D5185m	0	<b>0</b>	<1	0
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	1	<1
Magnesium	ppm	ASTM D5185m	<1	<b>1</b>	<1	<1
Calcium	ppm	ASTM D5185m	<1	<b>17</b>	25	27
Phosphorus	ppm	ASTM D5185m	2143	<b>3307</b>	2289	2273
Zinc	ppm	ASTM D5185m	<1	<b>17</b>	8	18
Sulfur	ppm	ASTM D5185m	23468	<b>45848</b>	30936	32627
Visc @ 40°C	cSt	ASTM D445	170	<b>193</b>	181	179

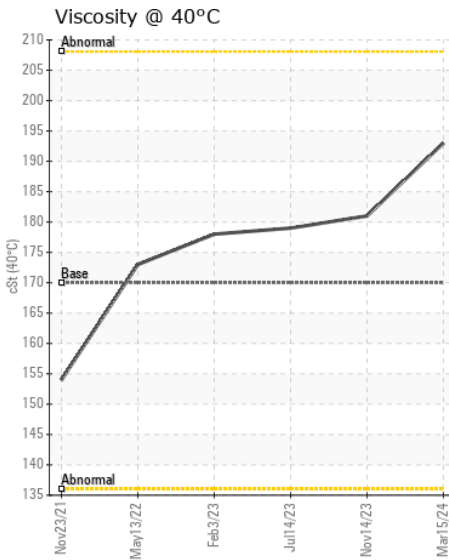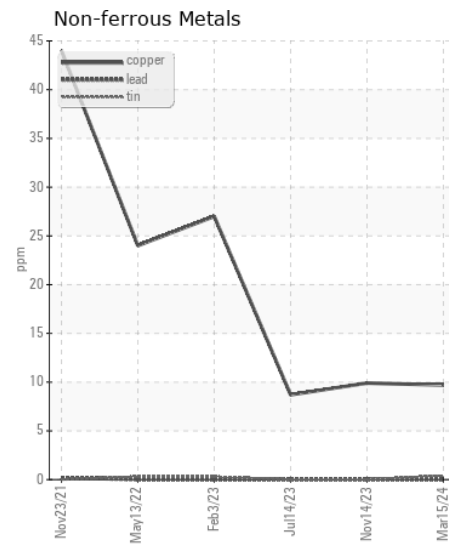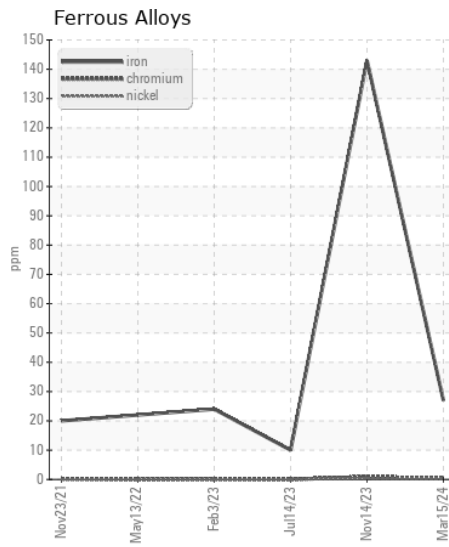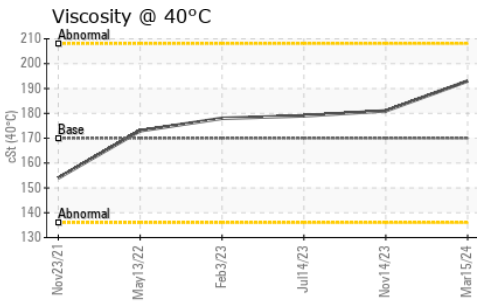

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : DJJ0018457  
**Lab Number** : 06125178  
**Unique Number** : 10939329  
**Test Package** : CONST  
**Received** : 21 Mar 2024  
**Tested** : 25 Mar 2024  
**Diagnosed** : 25 Mar 2024 - Sean Felton

**ADVANTAGE METALS RECYCLING - SEDALIA**  
 300 N IRON AVE  
 SEDALIA, MO  
 US 65301  
 Contact: SCOTT TUTTLE  
 scott.tuttle@advantagerecycling.com  
 T: (660)827-1873  
 F: (660)827-5304

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)