



ASCENDUM

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
Ascendum Machinery
Machine Id
VOLVO EC200E 314279
Component
Right Travel
Fluid
VOLVO PREMIUM GEAR OIL 85W-140 GL-5 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0007608	VCP0006671	---
Sample Date		Client Info		28 Feb 2024	10 Apr 2023	---
Machine Age	hrs	Client Info		962	687	---
Oil Age	hrs	Client Info		275	687	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		None	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>1200	134	282	---
Chromium	ppm	ASTM D5185m	>20	1	3	---
Nickel	ppm	ASTM D5185m	>5	0	0	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>100	0	2	---
Lead	ppm	ASTM D5185m	>50	0	0	---
Copper	ppm	ASTM D5185m	>50	0	0	---
Tin	ppm	ASTM D5185m	>5	0	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	MODER	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>100	6	16	---
Potassium	ppm	ASTM D5185m	>20	1	5	---
Water		WC Method	>0.25	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.25	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	4	---
Boron	ppm	ASTM D5185m	111	77	0	---
Barium	ppm	ASTM D5185m	0.0	0	0	---
Molybdenum	ppm	ASTM D5185m	0.9	0	2	---
Manganese	ppm	ASTM D5185m	0.0	2	6	---
Magnesium	ppm	ASTM D5185m	39	<1	6	---
Calcium	ppm	ASTM D5185m	93	10	10	---
Phosphorus	ppm	ASTM D5185m	920	699	273	---
Zinc	ppm	ASTM D5185m	104	15	6	---
Sulfur	ppm	ASTM D5185m	20179	24477	15556	---
Visc @ 40°C	cSt	ASTM D445	333	208	162	---

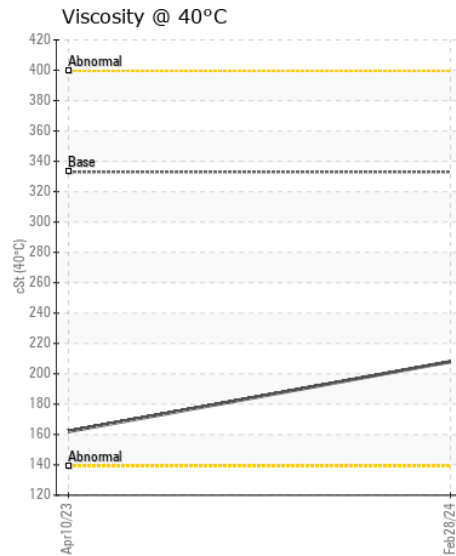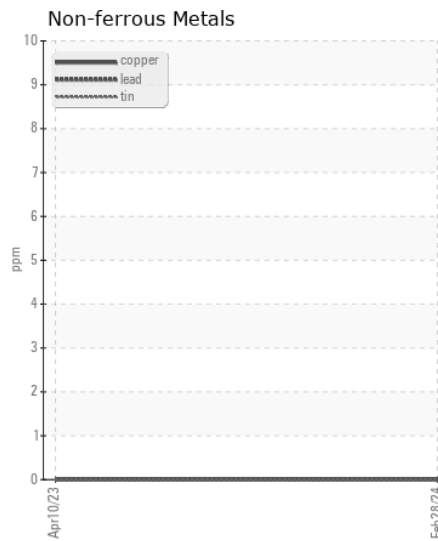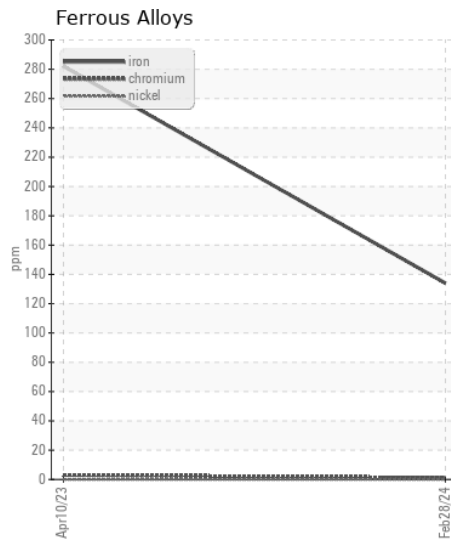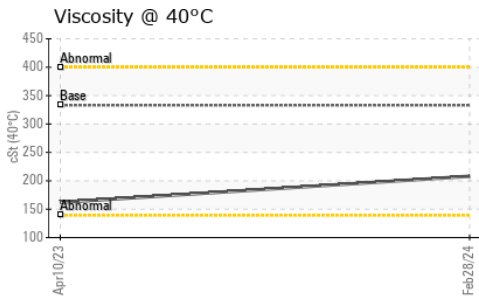

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0007608
Lab Number : 06125215
Unique Number : 10939366
Test Package : CONST
Received : 21 Mar 2024
Tested : 25 Mar 2024
Diagnosed : 25 Mar 2024 - Don Baldrige

NEAL'S PALLET COMPANY INC
 8808 WILKINSON BLVD
 CHARLOTTE, NC
 US 28214
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: