



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
THOMPSON 6 IN VAC PUMP 336

Component
Diesel Engine

Fluid
PETRO CANADA 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0906200	WC0906057	WC0906056
Sample Date		Client Info		11 Mar 2024	28 Feb 2024	09 Feb 2024
Machine Age	hrs	Client Info		28639	28313	28030
Oil Age	hrs	Client Info		326	283	275
Filter Age	hrs	Client Info		326	283	275
Oil Changed		Client Info		N/A	Changed	Changed
Filter Changed		Client Info		N/A	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	5	6	8
Chromium	ppm	ASTM D5185m	>20	<1	0	0
Nickel	ppm	ASTM D5185m	>4	<1	<1	<1
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	3	3	2
Lead	ppm	ASTM D5185m	>40	<1	1	1
Copper	ppm	ASTM D5185m	>330	<1	<1	<1
Tin	ppm	ASTM D5185m	>15	<1	1	1
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	4	2	3
Potassium	ppm	ASTM D5185m	>20	2	0	<1
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	5.7	5.7	5.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	17.6	17.6	17.3
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		1	0	<1
Boron	ppm	ASTM D5185m		4	0	2
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		64	71	72
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m		1066	1243	1232
Calcium	ppm	ASTM D5185m		1254	1227	1239
Phosphorus	ppm	ASTM D5185m		1210	1220	1236
Zinc	ppm	ASTM D5185m		1385	1631	1652
Sulfur	ppm	ASTM D5185m		3637	3821	3872
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.1	14.0	13.7
Base Number (BN)	mg KOH/g	ASTM D2896		9.3	9.1	9.0
Visc @ 100°C	cSt	ASTM D445		14.5	14.3	14.2

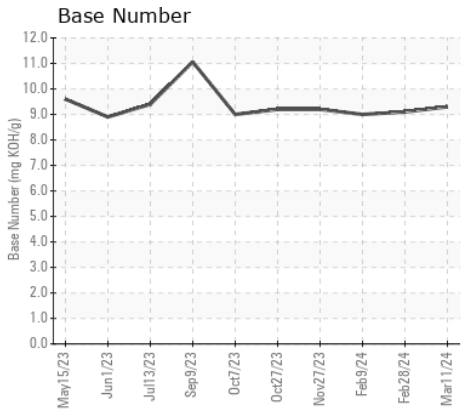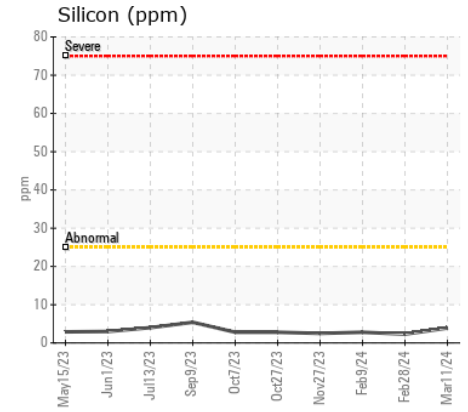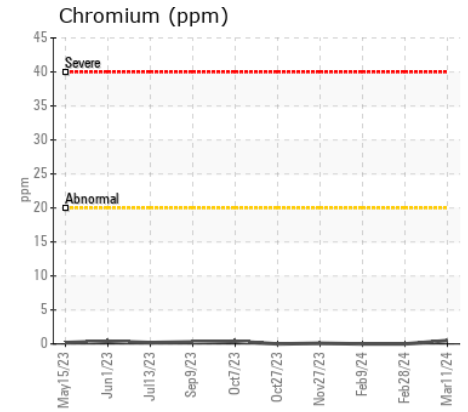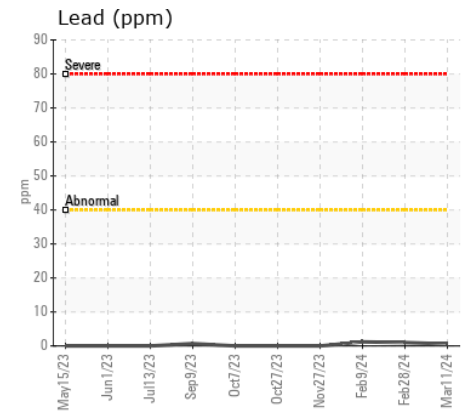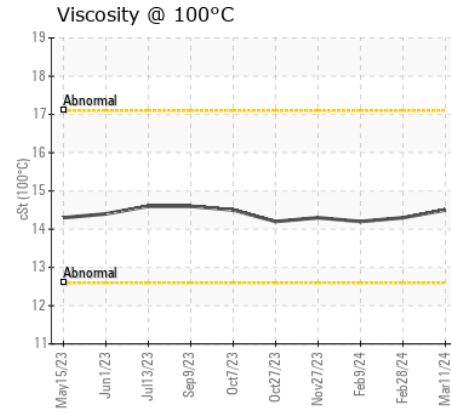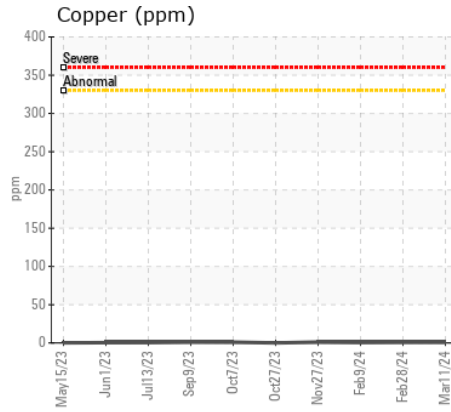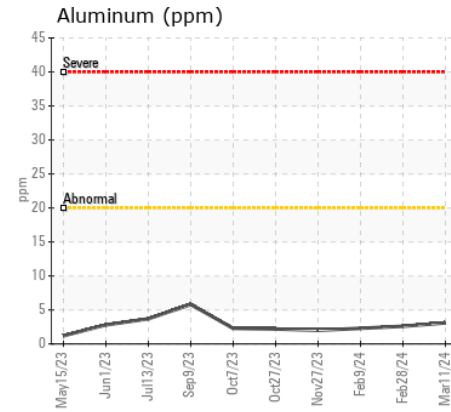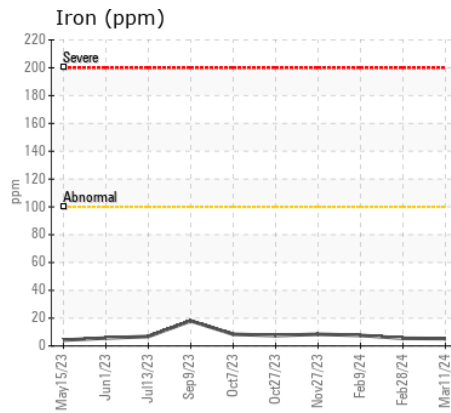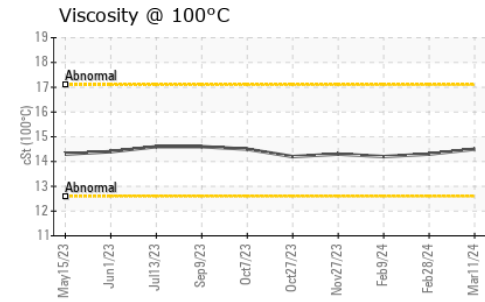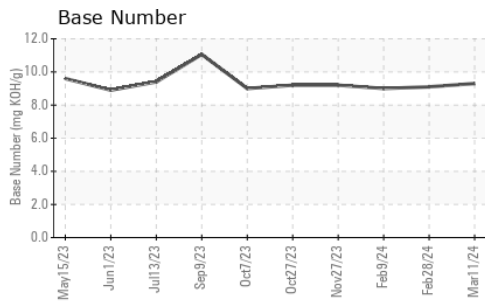

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0906200 **Received** : 21 Mar 2024
Lab Number : 06125422 **Tested** : 22 Mar 2024
Unique Number : 10939573 **Diagnosed** : 22 Mar 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

C.L. BENTON & SONS INC
 706 38TH AVE N
 MYRTLE BEACH, SC
 US 29577
 Contact: NEIL
 neil@clbenton.com

T:
F: