



**LEAHY-WOLF**  
Lubricating specialists since 1946

OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**DODGE 192**  
Component  
**Diesel Engine**  
Fluid  
**DIESEL ENGINE OIL SAE 40 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LW0008590</b>	LW0008631	---
Sample Date		Client Info		<b>21 Feb 2024</b>	27 Jan 2024	---
Machine Age	hrs	Client Info		<b>0</b>	0	---
Oil Age	hrs	Client Info		<b>0</b>	0	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>N/A</b>	N/A	---
Filter Changed		Client Info		<b>N/A</b>	N/A	---
Sample Status				<b>NORMAL</b>	NORMAL	---

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>20</b>	10	---
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>20	<b>3</b>	2	---
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	0	---
Copper	ppm	ASTM D5185m	>330	<b>1</b>	1	---
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

**CONTAMINATION**











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>9</b>	1	---
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	2	---
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol		WC Method		<b>NEG</b>	NEG	---
Soot %	%	*ASTM D7844	>3	<b>0.3</b>	0.2	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.5</b>	8.2	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.2</b>	18.7	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>216	<b>&lt;1</b>	0	---
Boron	ppm	ASTM D5185m	250	<b>7</b>	2	---
Barium	ppm	ASTM D5185m	10	<b>0</b>	<1	---
Molybdenum	ppm	ASTM D5185m	100	<b>65</b>	60	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Magnesium	ppm	ASTM D5185m	450	<b>997</b>	900	---
Calcium	ppm	ASTM D5185m	3000	<b>1131</b>	1010	---
Phosphorus	ppm	ASTM D5185m	1150	<b>1184</b>	942	---
Zinc	ppm	ASTM D5185m	1350	<b>1316</b>	1167	---
Sulfur	ppm	ASTM D5185m	4250	<b>3364</b>	2856	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>18.0</b>	15.8	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>8.2</b>	8.4	---
Visc @ 100°C	cSt	ASTM D445	14.4	<b>14.0</b>	13.9	---

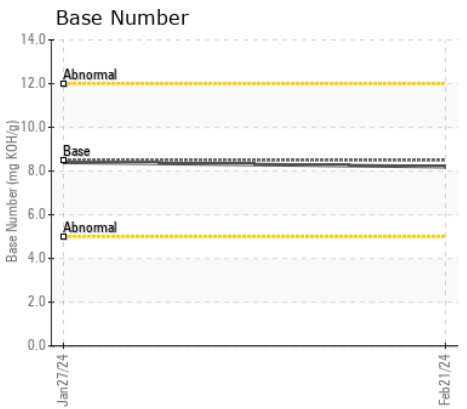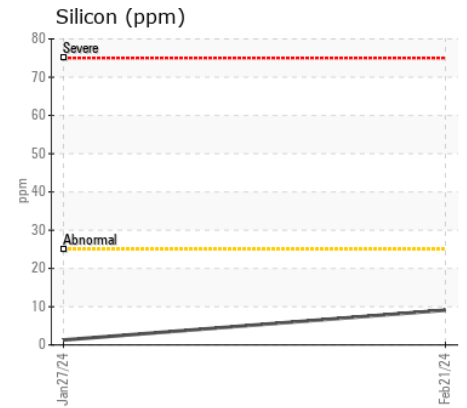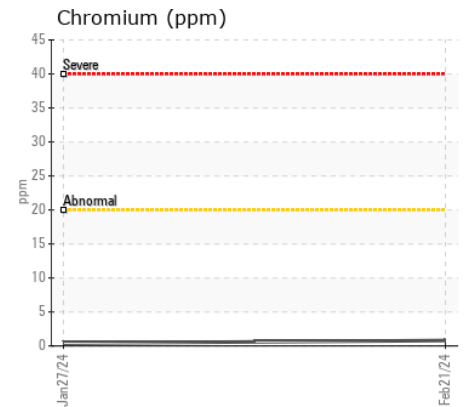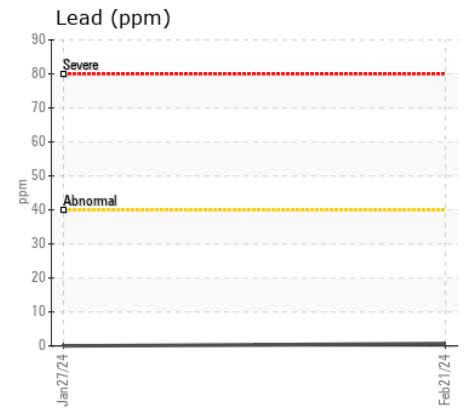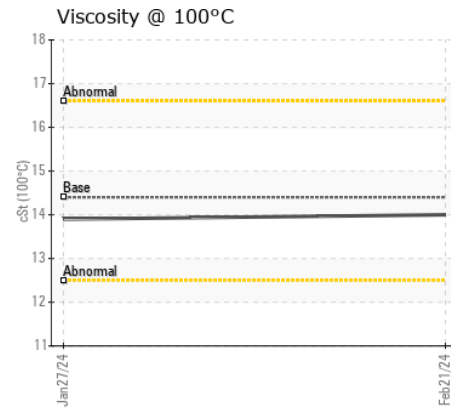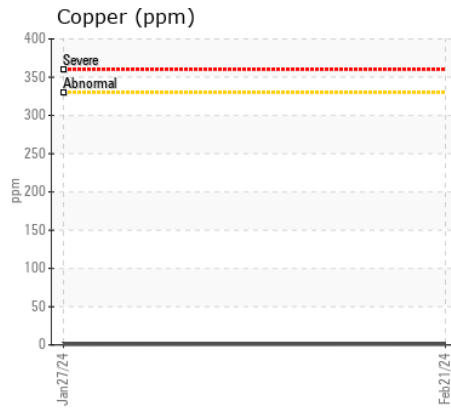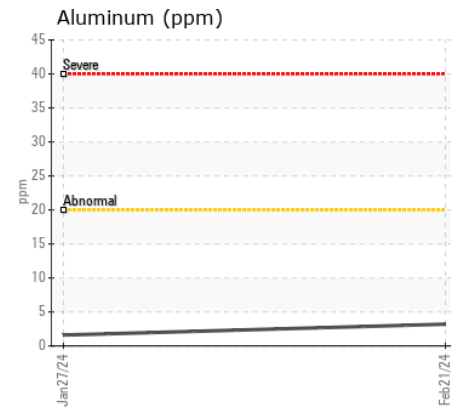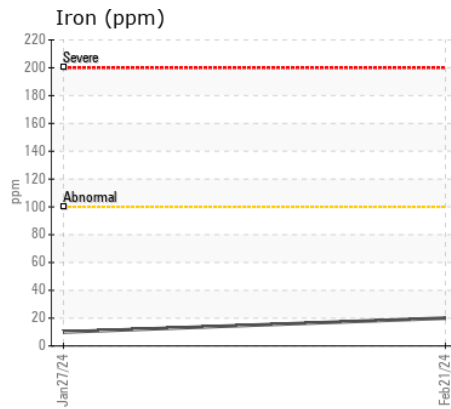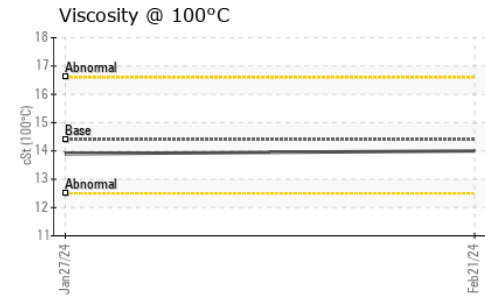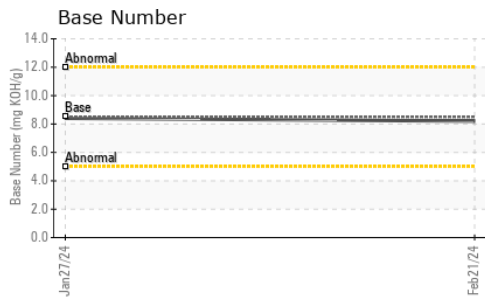

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : LW0008590

**Lab Number** : 06125449

**Unique Number** : 10939600

**Test Package** : MOB 1 ( Additional Tests: TBN )

**Received** : 21 Mar 2024

**Tested** : 22 Mar 2024

**Diagnosed** : 22 Mar 2024 - Wes Davis

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**LRS - NILES**

33541 REUM RD

NILES, MI

US 49120

Contact: JOHN HUGHES

johnh@michianarecyclinganddisposal.com

T: (269)684-0900 X:124

F: