



LEAHY-WOLF
Lubricating specialists since 1946

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
FORD 04
Component
Gasoline Engine
Fluid
NOT GIVEN (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LW0007903	LW0007841	---
Sample Date		Client Info		14 Mar 2024	06 Nov 2023	---
Machine Age	hrs	Client Info		0	0	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		N/A	N/A	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	65	82	---
Chromium	ppm	ASTM D5185m	>20	2	1	---
Nickel	ppm	ASTM D5185m	>5	2	2	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m	>2	0	0	---
Aluminum	ppm	ASTM D5185m	>40	7	8	---
Lead	ppm	ASTM D5185m	>50	<1	0	---
Copper	ppm	ASTM D5185m	>155	10	13	---
Tin	ppm	ASTM D5185m	>10	<1	<1	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>30	15	12	---
Potassium	ppm	ASTM D5185m	>20	2	1	---
Fuel	%	ASTM D3524	>4.0	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844		0.1	0.1	---
Nitration	Abs/cm	*ASTM D7624	>20	11.1	16.3	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.1	29.5	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>400	4	3	---
Boron	ppm	ASTM D5185m		44	12	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		107	61	---
Manganese	ppm	ASTM D5185m		<1	1	---
Magnesium	ppm	ASTM D5185m		714	431	---
Calcium	ppm	ASTM D5185m		1448	1183	---
Phosphorus	ppm	ASTM D5185m		933	600	---
Zinc	ppm	ASTM D5185m		991	743	---
Sulfur	ppm	ASTM D5185m		3730	2027	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.4	30.9	---
Base Number (BN)	mg KOH/g	ASTM D2896		3.8	3.2	---
Visc @ 100°C	cSt	ASTM D445		9.1	10.1	---

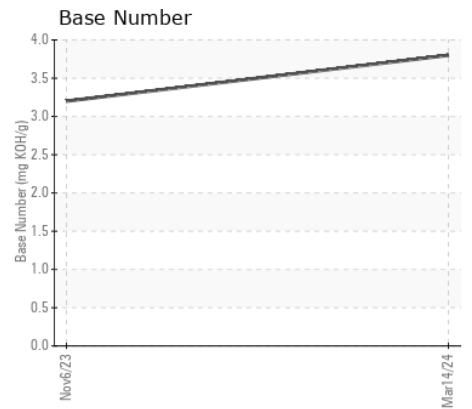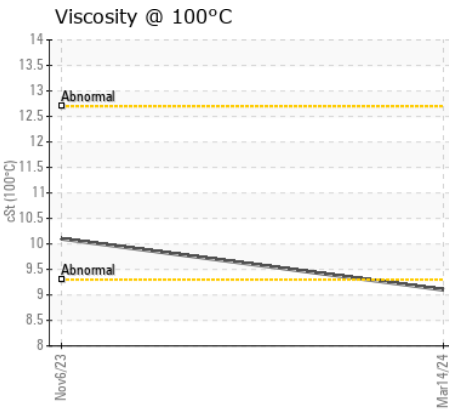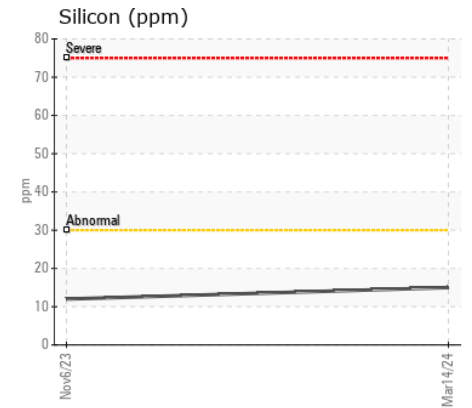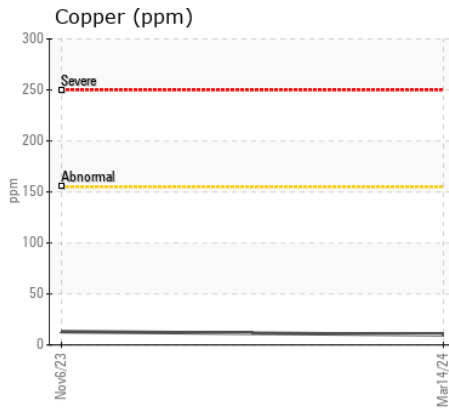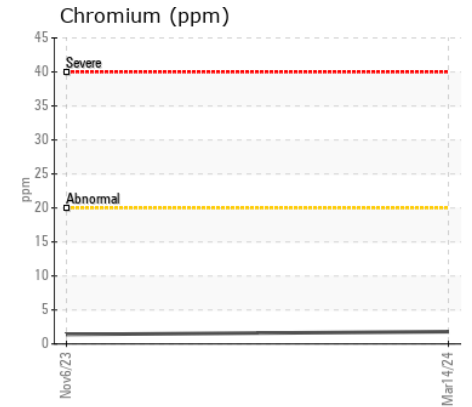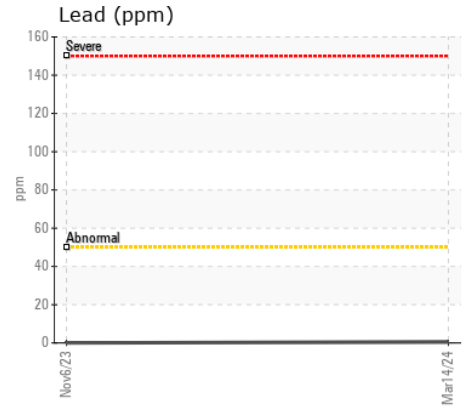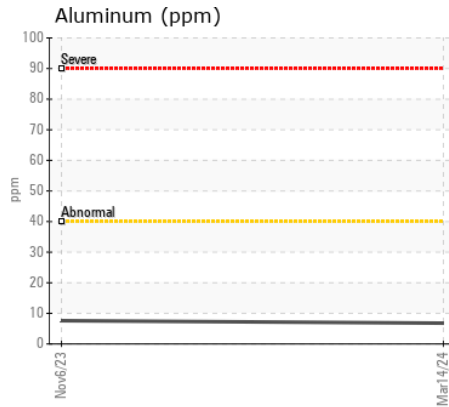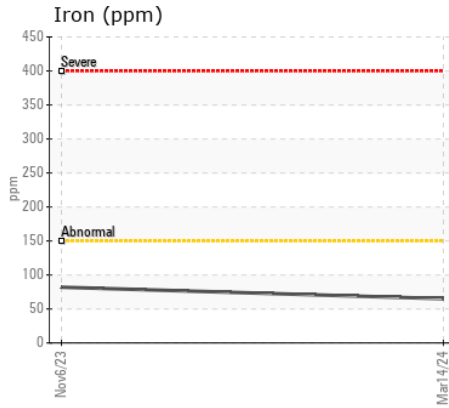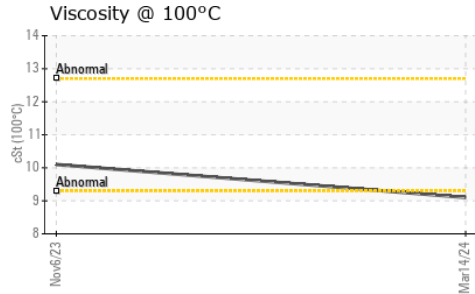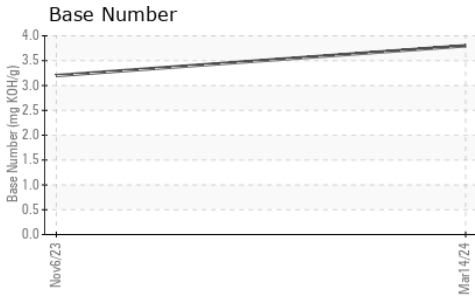

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LW0007903 **Received** : 21 Mar 2024
Lab Number : 06125461 **Tested** : 22 Mar 2024
Unique Number : 10939612 **Diagnosed** : 22 Mar 2024 - Jonathan Hester
Test Package : MOB 1 (Additional Tests: FuelDilution, TBN)

LRS - NILES
 33541 REUM RD
 NILES, MI
 US 49120

Contact: JOHN HUGHES
 johnh@michianarecyclinganddisposal.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

T: (269)684-0900 X:124

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: