



LEAHY-WOLF
Lubricating specialists since 1946

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
DODGE 52
Component
Diesel Engine
Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LW0009030	LW0008632	LW0002121
Sample Date		Client Info		14 Mar 2024	27 Jan 2024	20 Jul 2021
Machine Age	mls	Client Info		0	0	0
Oil Age	mls	Client Info		0	0	0
Filter Age	mls	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	ABNORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	23	15	11
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>4	<1	<1	0
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	3	2	0
Lead	ppm	ASTM D5185m	>40	<1	0	<1
Copper	ppm	ASTM D5185m	>330	41	48	12
Tin	ppm	ASTM D5185m	>15	<1	0	<1
Vanadium	ppm	ASTM D5185m		<1	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	14	10	13
Potassium	ppm	ASTM D5185m	>20	4	5	<1
Fuel	%	ASTM D3524	>5	<1.0	0.9	0.6
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0	0	0.1
Nitration	Abs/cm	*ASTM D7624	>20	9.3	9.0	10.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.7	20.2	21
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		4	0	2
Boron	ppm	ASTM D5185m		54	46	99
Barium	ppm	ASTM D5185m		0	<1	<1
Molybdenum	ppm	ASTM D5185m		79	66	269
Manganese	ppm	ASTM D5185m		1	1	<1
Magnesium	ppm	ASTM D5185m		537	432	495
Calcium	ppm	ASTM D5185m		1029	951	1472
Phosphorus	ppm	ASTM D5185m		667	523	674
Zinc	ppm	ASTM D5185m		724	641	780
Sulfur	ppm	ASTM D5185m		2462	1898	1857
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.9	13.3	15.5
Base Number (BN)	mg KOH/g	ASTM D2896		3.6	▲ 2.8	---
Visc @ 100°C	cSt	ASTM D445		9.5	8.4	8.7

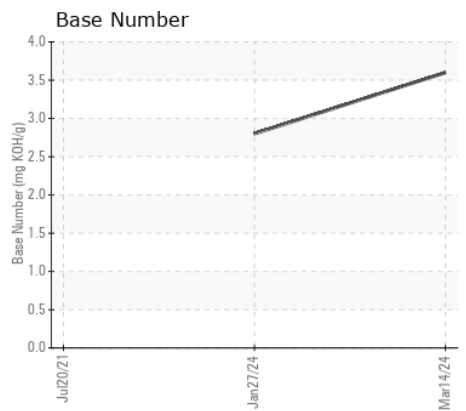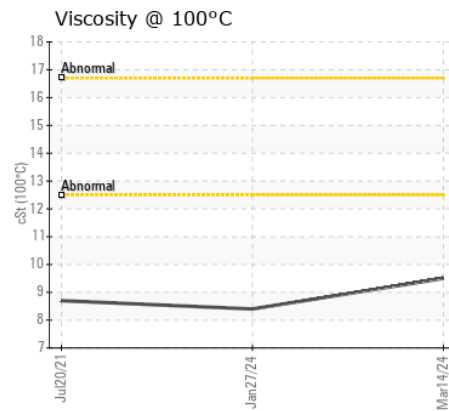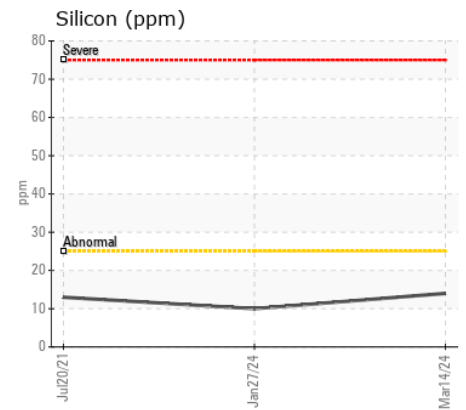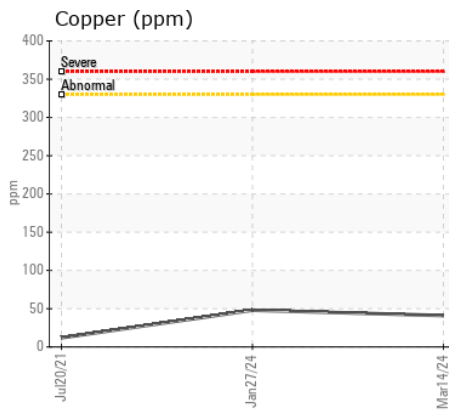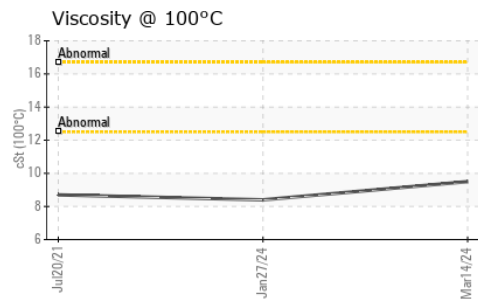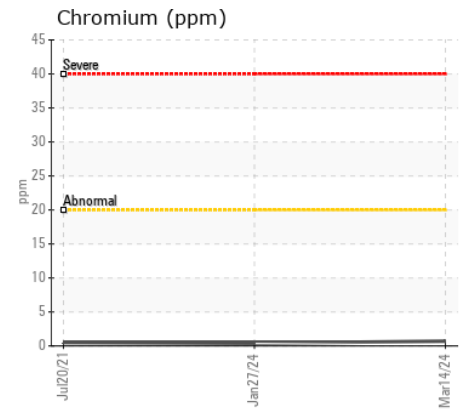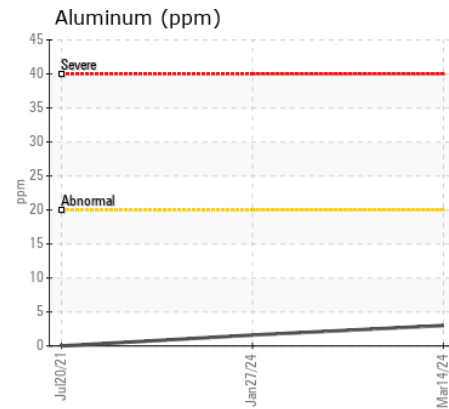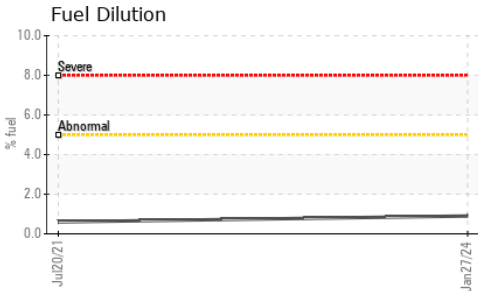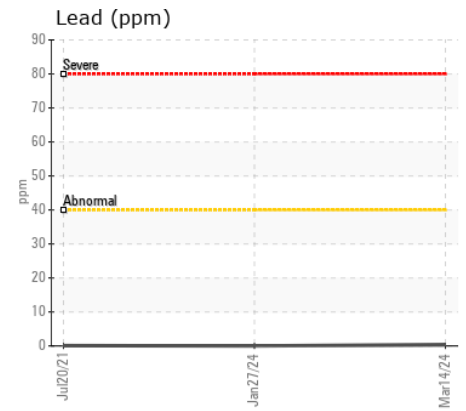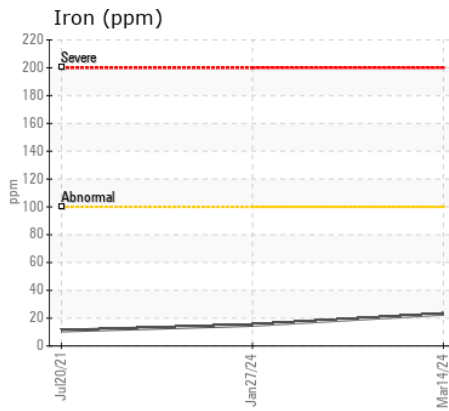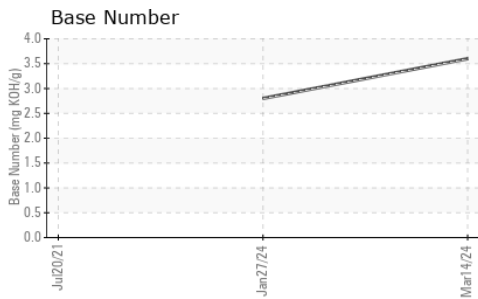

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LW0009030 **Received** : 21 Mar 2024
Lab Number : 06125464 **Tested** : 22 Mar 2024
Unique Number : 10939615 **Diagnosed** : 22 Mar 2024 - Jonathan Hester
Test Package : MOB 1 (Additional Tests: FuelDilution, TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

LRs - NILES
 33541 REUM RD
 NILES, MI
 US 49120

Contact: JEDI ATCHISON
 josepha@michianarecyclinganddisposal.com

T: (269)845-3153

F: