



LEAHY-WOLF
Lubricating specialists since 1946

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
4017
Component
Diesel Engine
Fluid
NOT GIVEN (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LW0008592	LW0007886	LW0005556
Sample Date		Client Info		21 Feb 2024	14 Sep 2023	06 Jan 2023
Machine Age	mls	Client Info		0	0	0
Oil Age	mls	Client Info		0	0	0
Filter Age	mls	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>120	12	15	13
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>5	1	1	5
Titanium	ppm	ASTM D5185m	>2	<1	<1	1
Silver	ppm	ASTM D5185m	>2	0	0	1
Aluminum	ppm	ASTM D5185m	>20	2	<1	2
Lead	ppm	ASTM D5185m	>40	<1	0	1
Copper	ppm	ASTM D5185m	>330	<1	8	57
Tin	ppm	ASTM D5185m	>15	<1	2	1
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	4	4	9
Potassium	ppm	ASTM D5185m	>20	2	2	0
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>4	0.8	0.7	0.4
Nitration	Abs/cm	*ASTM D7624	>20	8.4	8.7	9.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.6	18.9	19.6
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	4	2
Boron	ppm	ASTM D5185m		<1	2	48
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		60	58	64
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		988	1083	352
Calcium	ppm	ASTM D5185m		1116	1280	1761
Phosphorus	ppm	ASTM D5185m		1128	1081	956
Zinc	ppm	ASTM D5185m		1307	1399	1162
Sulfur	ppm	ASTM D5185m		3099	3725	3654
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.5	13.6	14.7
Base Number (BN)	mg KOH/g	ASTM D2896		7.8	7.7	7.6
Visc @ 100°C	cSt	ASTM D445		14.0	14.1	13.6

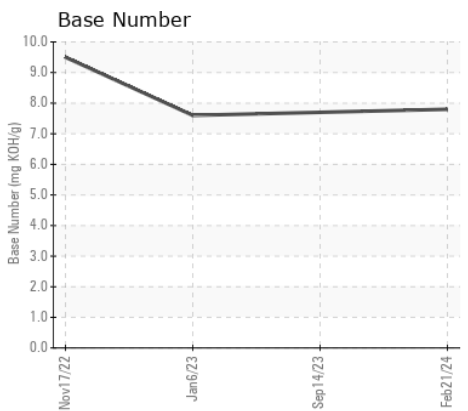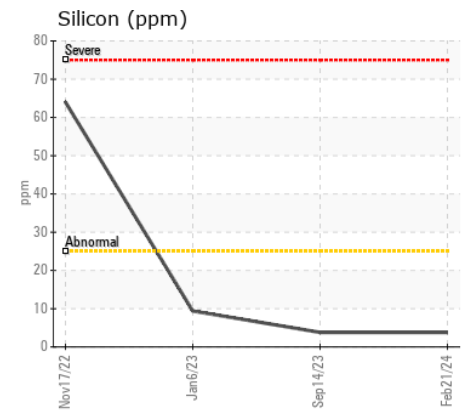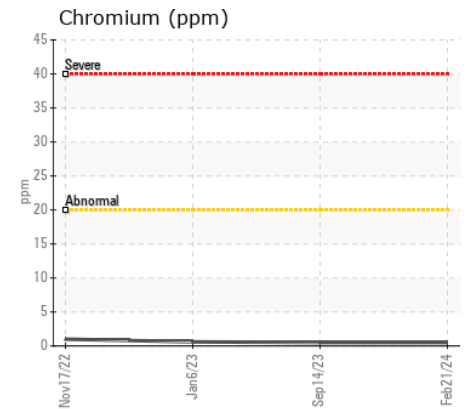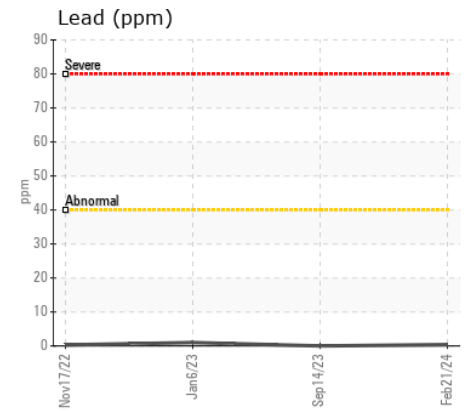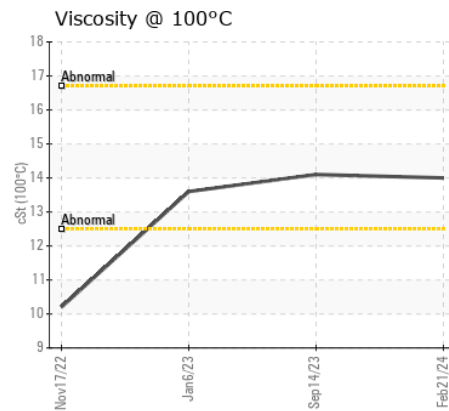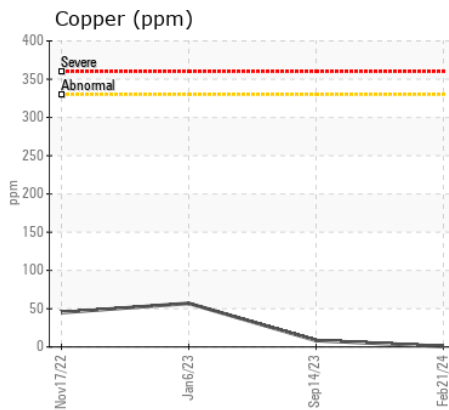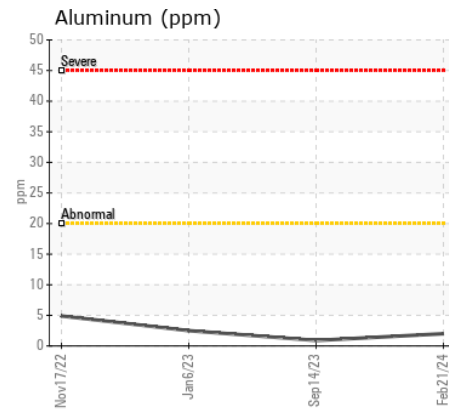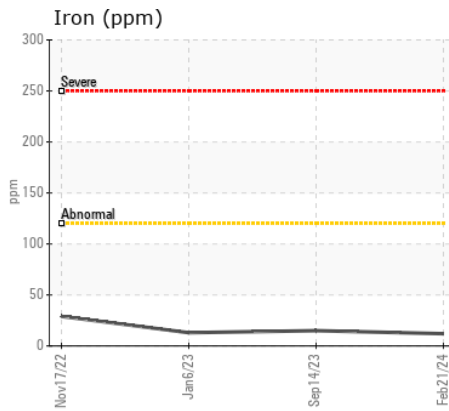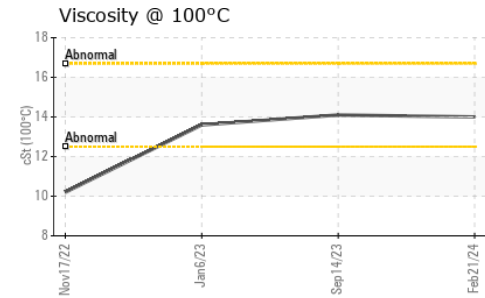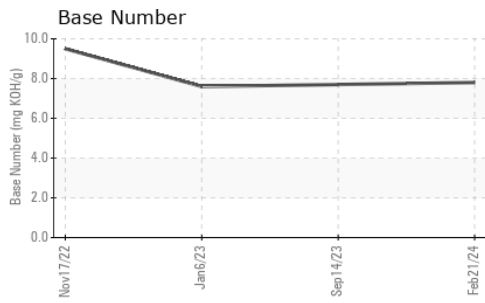

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : LW0008592

Lab Number : 06125471

Unique Number : 10939622

Test Package : MOB 1 (Additional Tests: TBN)

Received : 21 Mar 2024

Tested : 22 Mar 2024

Diagnosed : 22 Mar 2024 - Wes Davis

LRS - NILES

33541 REUM RD

NILES, MI

US 49120

Contact: JOHN HUGHES

johnh@michianarecyclinganddisposal.com

T: (269)684-0900 X:124

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)