



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**(BD49631)**  
Machine Id  
**913186**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (10 GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0104542</b>	GFL0041816	---
Sample Date		Client Info		<b>22 Jan 2024</b>	01 Nov 2023	---
Machine Age	mls	Client Info		<b>0</b>	0	---
Oil Age	mls	Client Info		<b>600</b>	600	---
Filter Age	mls	Client Info		<b>600</b>	600	---
Oil Changed		Client Info		<b>Changed</b>	Changed	---
Filter Changed		Client Info		<b>Changed</b>	Changed	---
Sample Status				<b>NORMAL</b>	ABNORMAL	---

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>120	<b>12</b>	43	---
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	1	---
Nickel	ppm	ASTM D5185m	>5	<b>4</b>	▲ 16	---
Titanium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	---
Silver	ppm	ASTM D5185m	>2	<b>0</b>	<1	---
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	6	---
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	<1	---
Copper	ppm	ASTM D5185m	>330	<b>17</b>	96	---
Tin	ppm	ASTM D5185m	>15	<b>1</b>	4	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

**CONTAMINATION**







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>9</b>	▲ 75	---
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	15	---
Fuel		WC Method	>3.0	<b>&lt;1.0</b>	0.3	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol		WC Method		<b>NEG</b>	NEG	---
Soot %	%	*ASTM D7844	>4	<b>0.5</b>	0.9	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.5</b>	10.8	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.4</b>	24.5	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>2</b>	2	---
Boron	ppm	ASTM D5185m	0	<b>10</b>	137	---
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	60	<b>56</b>	112	---
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	5	---
Magnesium	ppm	ASTM D5185m	1010	<b>800</b>	750	---
Calcium	ppm	ASTM D5185m	1070	<b>976</b>	1363	---
Phosphorus	ppm	ASTM D5185m	1150	<b>926</b>	777	---
Zinc	ppm	ASTM D5185m	1270	<b>1084</b>	894	---
Sulfur	ppm	ASTM D5185m	2060	<b>2674</b>	2316	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>15.3</b>	21.2	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>8.3</b>	7.9	---
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.4</b>	● 10.6	---

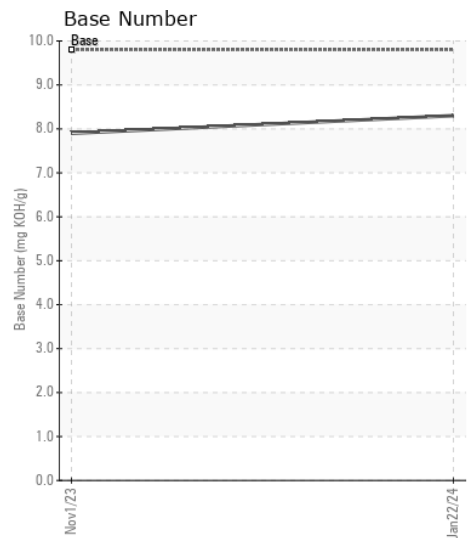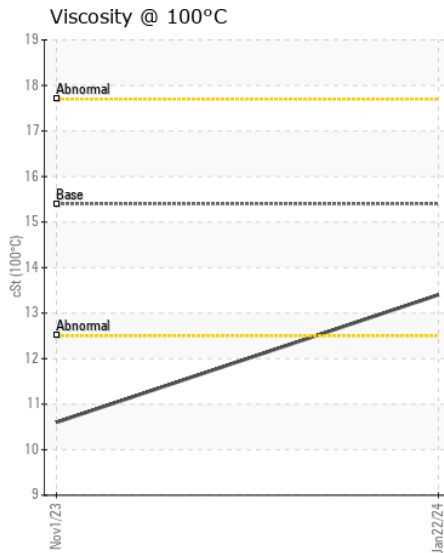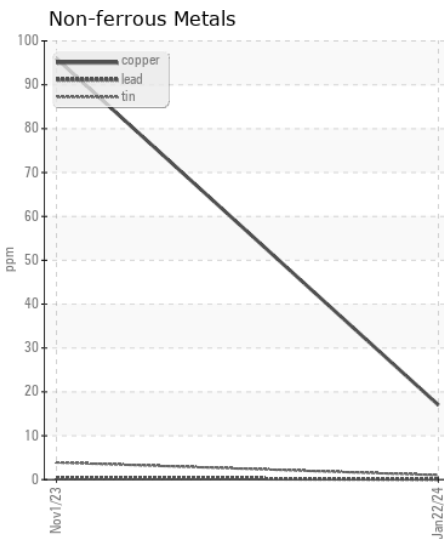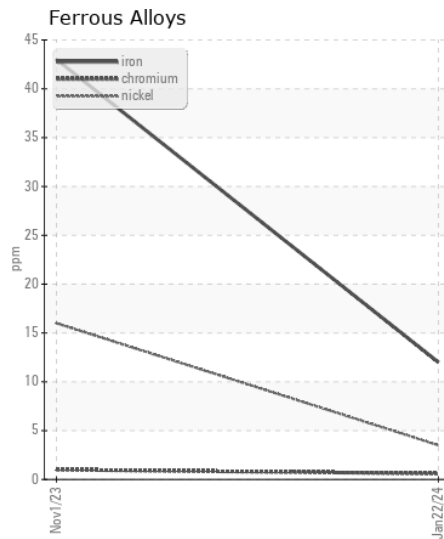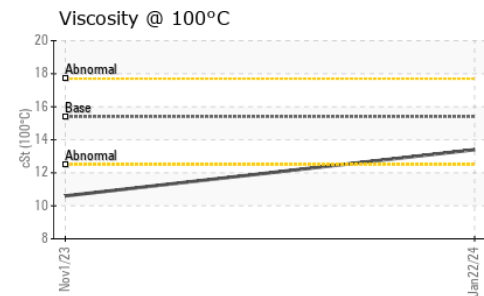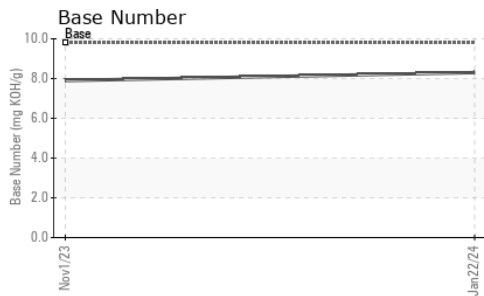

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0104542  
**Lab Number** : 06125476  
**Unique Number** : 10939627  
**Test Package** : FLEET

**Received** : 21 Mar 2024  
**Tested** : 22 Mar 2024  
**Diagnosed** : 25 Mar 2024 - Don Baldrige

**GFL Environmental - 461 - Smith Hauling**  
 3239 W. M 28  
 Brimley, MI  
 US 49715

Contact: Jim Smith  
 jim.smith@gflenv.com  
 T: (906)635-3380

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: