



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ATTENTION
FLUID CONDITION	NORMAL

Area

Mobile Fleet

Machine Id

8113 8113

Component

Transmission (Auto)

Fluid

MOBIL DELVAC SYNTHETIC ATF (8 GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0918601	WC0835052	WC0770947
Sample Date		Client Info		19 Mar 2024	14 Aug 2023	16 Mar 2023
Machine Age	hrs	Client Info		13357	12173	11117
Oil Age	hrs	Client Info		1196	6063	1247
Filter Age	hrs	Client Info		1196	6063	1247
Oil Changed		Client Info		Not Changd	Changed	Not Changd
Filter Changed		Client Info		Not Changd	Changed	Not Changd
Sample Status				ATTENTION	NORMAL	ATTENTION

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>300	29	60	75
Chromium	ppm	ASTM D5185m	>2	<1	0	0
Nickel	ppm	ASTM D5185m	>4	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	<1
Silver	ppm	ASTM D5185m	>5	0	0	0
Aluminum	ppm	ASTM D5185m	>70	6	13	19
Lead	ppm	ASTM D5185m	>85	<1	5	6
Copper	ppm	ASTM D5185m	>90	7	11	9
Tin	ppm	ASTM D5185m	>10	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is a moderate amount of silt (particulates < 14 microns in size) present in the fluid.

Silicon	ppm	ASTM D5185m	>20	2	5	6
Potassium	ppm	ASTM D5185m	>20	0	2	<1
Water		WC Method	>0.1	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>10000	14510	5913	12472
Particles >6µm		ASTM D7647	>2500	1880	933	2465
Particles >14µm		ASTM D7647	>320	56	30	80
Particles >21µm		ASTM D7647	>80	12	7	17
Particles >38µm		ASTM D7647	>20	0	0	1
Particles >71µm		ASTM D7647	>4	0	0	0
Oil Cleanliness		ISO 4406 (c)	>20/18/15	21/18/13	20/17/12	21/18/13
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	0	4
Boron	ppm	ASTM D5185m		143	137	119
Barium	ppm	ASTM D5185m		0	<1	0
Molybdenum	ppm	ASTM D5185m		2	0	<1
Manganese	ppm	ASTM D5185m		<1	<1	1
Magnesium	ppm	ASTM D5185m		9	4	3
Calcium	ppm	ASTM D5185m		96	67	92
Phosphorus	ppm	ASTM D5185m		314	289	292
Zinc	ppm	ASTM D5185m		25	19	18
Sulfur	ppm	ASTM D5185m		1194	1076	949
Visc @ 40°C	cSt	ASTM D445	39	31.9	36.4	36.6

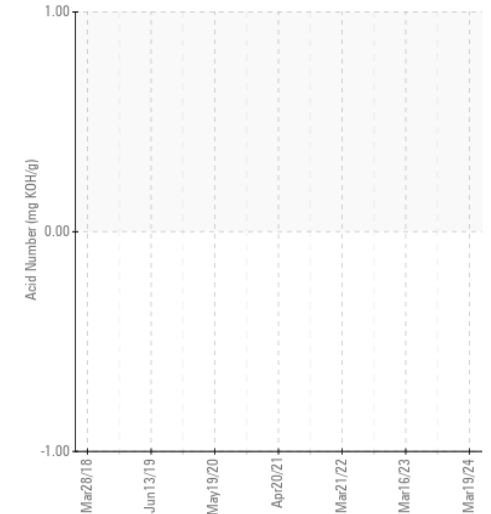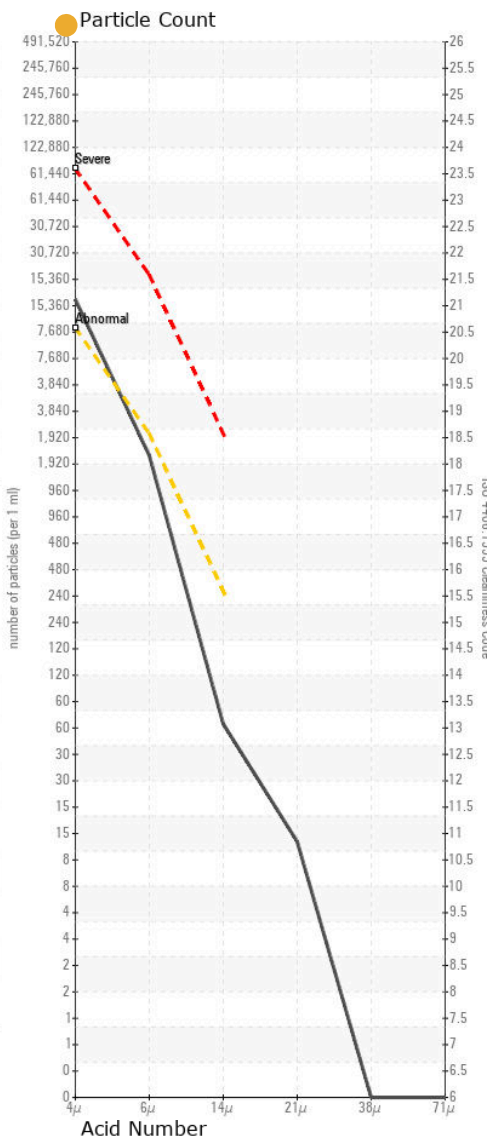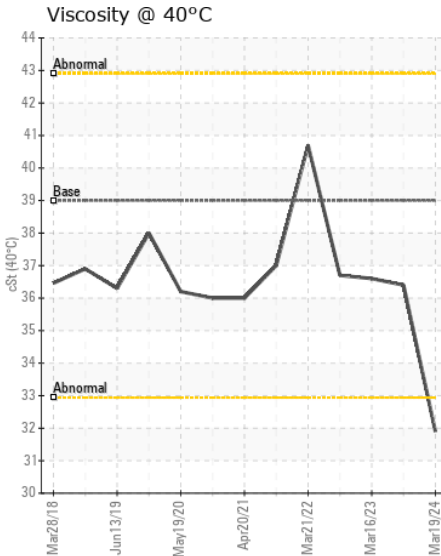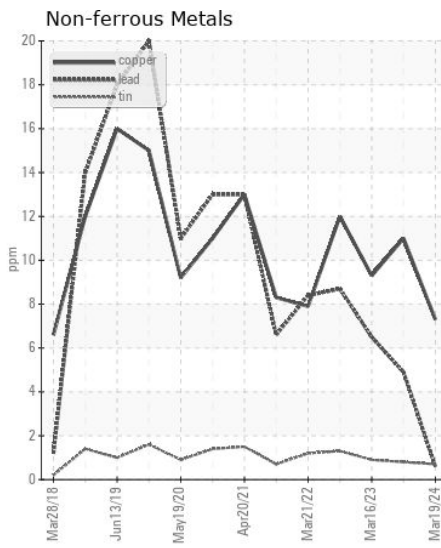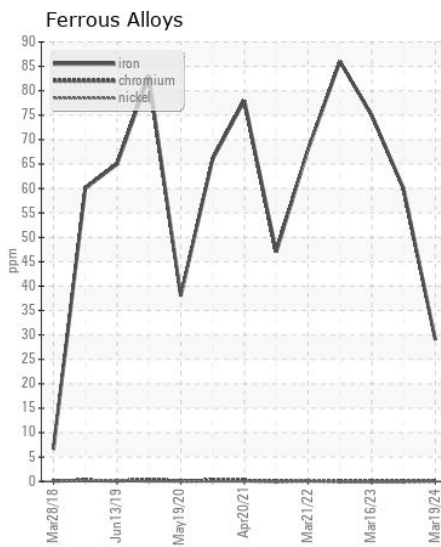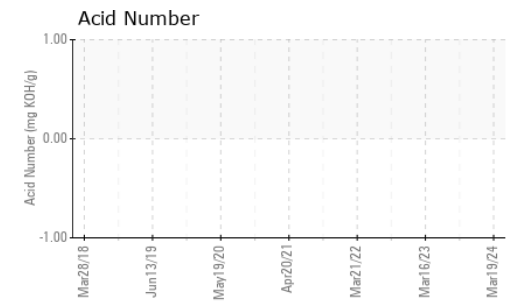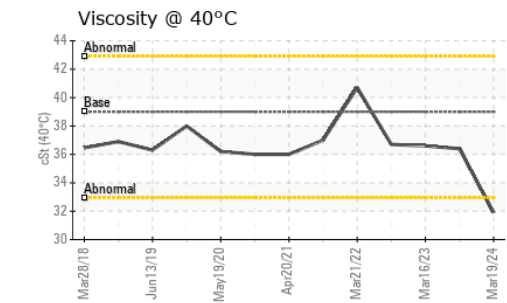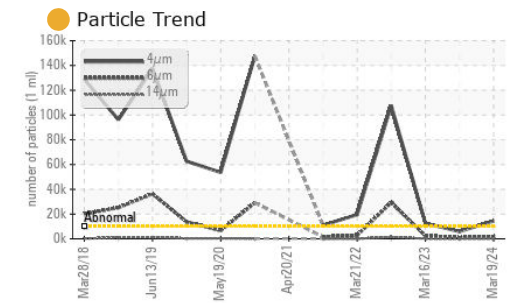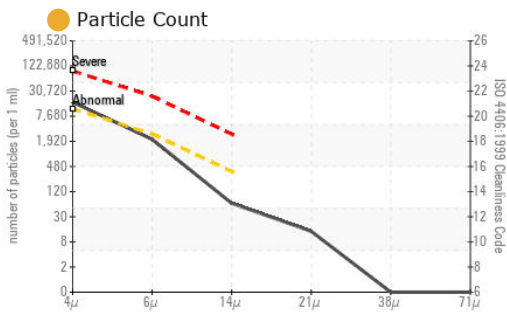

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0918601 **Received** : 21 Mar 2024
Lab Number : 06125570 **Tested** : 25 Mar 2024
Unique Number : 10939721 **Diagnosed** : 25 Mar 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PrtCount)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

CAROLINA SUNROCK
 PO BOX 25
 BUTNER, NC
 US 27509

Contact: Leigh Dennis
 rdennis@thesunrockgroup.com
 T: (919)575-4505
 F: (919)575-0162