



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
JOHN DEERE 755K 1T0755KXTPF438589
Component
Hydrostatic
Fluid
JOHN DEERE HYDRAU (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0208046	JR0199191	JR0190366
Sample Date		Client Info		19 Mar 2024	10 Jan 2024	18 Oct 2023
Machine Age	hrs	Client Info		1463	987	488
Oil Age	hrs	Client Info		1463	987	488
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	N/A
Filter Changed		Client Info		Not Changd	Not Changd	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184		11	15	14
Iron	ppm	ASTM D5185m	>31	21	19	13
Chromium	ppm	ASTM D5185m	>9	0	<1	<1
Nickel	ppm	ASTM D5185m	>5	<1	<1	<1
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	2	2
Lead	ppm	ASTM D5185m	>11	0	1	1
Copper	ppm	ASTM D5185m	>41	6	6	5
Tin	ppm	ASTM D5185m	>5	0	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>31	<1	4	1
Potassium	ppm	ASTM D5185m	>20	0	2	2
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>21	2	0	0
Boron	ppm	ASTM D5185m		<1	0	0
Barium	ppm	ASTM D5185m		<1	3	0
Molybdenum	ppm	ASTM D5185m		0	<1	<1
Manganese	ppm	ASTM D5185m		0	<1	0
Magnesium	ppm	ASTM D5185m		0	1	2
Calcium	ppm	ASTM D5185m	87	108	97	105
Phosphorus	ppm	ASTM D5185m	727	649	743	736
Zinc	ppm	ASTM D5185m	900	818	878	912
Sulfur	ppm	ASTM D5185m	1500	1835	2343	2176
Visc @ 40°C	cSt	ASTM D445	65	59.1	57.2	58.4

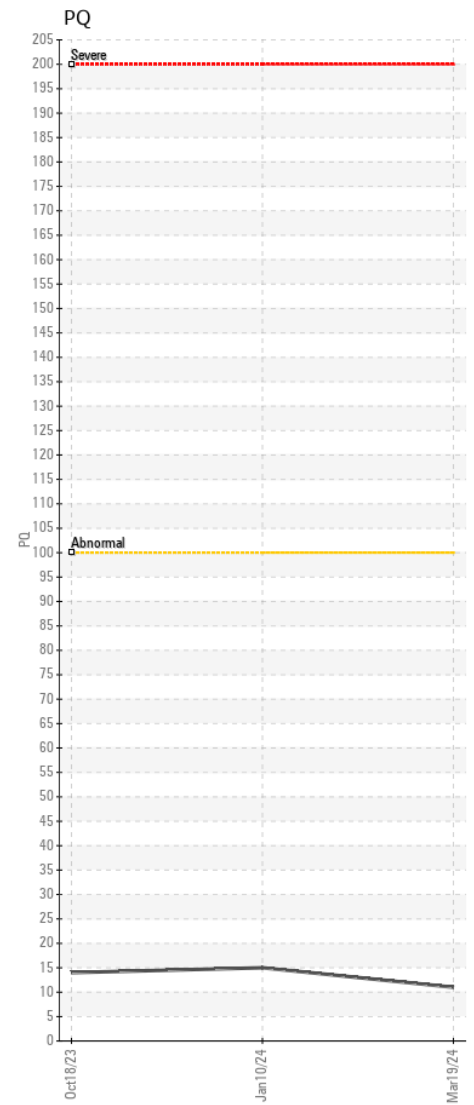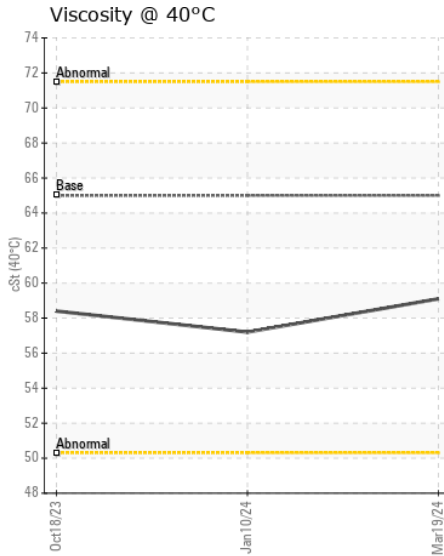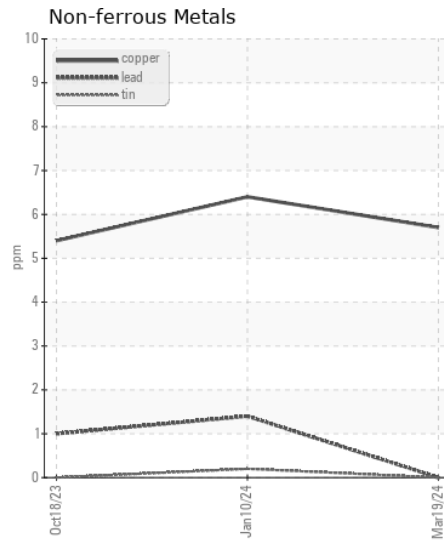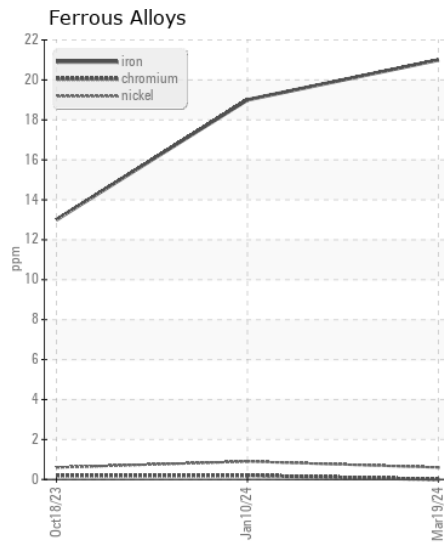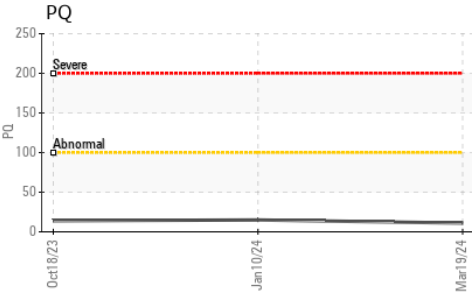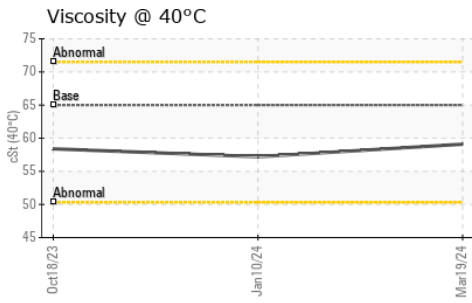

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0208046 **Received** : 21 Mar 2024
Lab Number : 06125828 **Tested** : 24 Mar 2024
Unique Number : 10939979 **Diagnosed** : 24 Mar 2024 - Wes Davis
Test Package : CONST (Additional Tests: PQ)

JRE - MANASSAS PARK
 9107 OWENS DRIVE
 MANASSAS PARK, VA
 US 20111

Contact: DON VEST
 dvest@jamesriverequipment.com
 T: (703)631-8500
 F: (703)631-4715

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)