



# OIL ANALYSIS REPORT

|                 |               |
|-----------------|---------------|
| WEAR            | <b>NORMAL</b> |
| CONTAMINATION   | <b>NORMAL</b> |
| FLUID CONDITION | <b>NORMAL</b> |

Area  
**FINISHING**  
Machine Id  
**Book Saw Outfeed Lift Table Hydraulic Unit (S/N TR110K13)**  
Component  
**Hydraulic System**  
Fluid  
**AW HYDRAULIC OIL ISO 68 (--- GAL)**

## RECOMMENDATION

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

## WEAR

All component wear rates are normal.










## CONTAMINATION

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

## FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| Test             | UOM      | Method       | Limit/Abn | Current            | History1    | History2    |
|------------------|----------|--------------|-----------|--------------------|-------------|-------------|
| Sample Number    |          | Client Info  |           | <b>WC0895069</b>   | WC0895041   | WC0834704   |
| Sample Date      |          | Client Info  |           | <b>08 Apr 2024</b> | 11 Mar 2024 | 15 Feb 2024 |
| Machine Age      | hrs      | Client Info  |           | <b>0</b>           | 0           | 0           |
| Oil Age          | hrs      | Client Info  |           | <b>0</b>           | 0           | 0           |
| Filter Age       | hrs      | Client Info  |           | <b>0</b>           | 0           | 0           |
| Oil Changed      |          | Client Info  |           | <b>N/A</b>         | N/A         | N/A         |
| Filter Changed   |          | Client Info  |           | <b>N/A</b>         | N/A         | N/A         |
| Sample Status    |          |              |           | <b>NORMAL</b>      | NORMAL      | NORMAL      |
| Iron             | ppm      | ASTM D5185m  | >20       | <b>6</b>           | 1           | 1           |
| Chromium         | ppm      | ASTM D5185m  | >20       | <b>0</b>           | <1          | 0           |
| Nickel           | ppm      | ASTM D5185m  | >20       | <b>0</b>           | 0           | 0           |
| Titanium         | ppm      | ASTM D5185m  |           | <b>&lt;1</b>       | <1          | 0           |
| Silver           | ppm      | ASTM D5185m  |           | <b>0</b>           | 0           | 0           |
| Aluminum         | ppm      | ASTM D5185m  | >20       | <b>2</b>           | 2           | 0           |
| Lead             | ppm      | ASTM D5185m  | >20       | <b>0</b>           | <1          | <1          |
| Copper           | ppm      | ASTM D5185m  | >20       | <b>3</b>           | 1           | 2           |
| Tin              | ppm      | ASTM D5185m  | >20       | <b>0</b>           | <1          | 0           |
| Vanadium         | ppm      | ASTM D5185m  |           | <b>0</b>           | <1          | 0           |
| White Metal      | scalar   | *Visual      | NONE      | <b>NONE</b>        | NONE        | NONE        |
| Yellow Metal     | scalar   | *Visual      | NONE      | <b>NONE</b>        | NONE        | NONE        |
| Silicon          | ppm      | ASTM D5185m  | >15       | <b>0</b>           | 0           | <1          |
| Potassium        | ppm      | ASTM D5185m  | >20       | <b>2</b>           | 1           | <1          |
| Water            |          | WC Method    | >0.05     | <b>NEG</b>         | NEG         | NEG         |
| Particles >4µm   |          | ASTM D7647   | >2500     | <b>1493</b>        | 249         | 554         |
| Particles >6µm   |          | ASTM D7647   | >640      | <b>283</b>         | 86          | 198         |
| Particles >14µm  |          | ASTM D7647   | >80       | <b>28</b>          | 10          | 15          |
| Particles >21µm  |          | ASTM D7647   | >20       | <b>11</b>          | 4           | 3           |
| Particles >38µm  |          | ASTM D7647   | >4        | <b>1</b>           | 0           | 0           |
| Particles >71µm  |          | ASTM D7647   | >3        | <b>0</b>           | 0           | 0           |
| Oil Cleanliness  |          | ISO 4406 (c) | >18/16/13 | <b>18/15/12</b>    | 15/14/10    | 16/15/11    |
| Silt             | scalar   | *Visual      | NONE      | <b>NONE</b>        | NONE        | NONE        |
| Debris           | scalar   | *Visual      | NONE      | <b>NONE</b>        | NONE        | NONE        |
| Sand/Dirt        | scalar   | *Visual      | NONE      | <b>NONE</b>        | NONE        | NONE        |
| Appearance       | scalar   | *Visual      | NORML     | <b>NORML</b>       | NORML       | NORML       |
| Odor             | scalar   | *Visual      | NORML     | <b>NORML</b>       | NORML       | NORML       |
| Emulsified Water | scalar   | *Visual      | >0.05     | <b>NEG</b>         | NEG         | NEG         |
| Sodium           | ppm      | ASTM D5185m  |           | <b>0</b>           | 0           | 2           |
| Boron            | ppm      | ASTM D5185m  | 5         | <b>1</b>           | 0           | 2           |
| Barium           | ppm      | ASTM D5185m  | 5         | <b>0</b>           | 0           | 0           |
| Molybdenum       | ppm      | ASTM D5185m  | 5         | <b>8</b>           | 2           | 1           |
| Manganese        | ppm      | ASTM D5185m  |           | <b>0</b>           | 0           | <1          |
| Magnesium        | ppm      | ASTM D5185m  | 25        | <b>11</b>          | 11          | 12          |
| Calcium          | ppm      | ASTM D5185m  | 200       | <b>84</b>          | 77          | 77          |
| Phosphorus       | ppm      | ASTM D5185m  | 300       | <b>367</b>         | 308         | 307         |
| Zinc             | ppm      | ASTM D5185m  | 370       | <b>437</b>         | 430         | 426         |
| Sulfur           | ppm      | ASTM D5185m  | 2500      | <b>1098</b>        | 805         | 822         |
| Acid Number (AN) | mg KOH/g | ASTM D8045   | 0.57      | <b>0.23</b>        | 0.23        | 0.24        |
| Visc @ 40°C      | cSt      | ASTM D445    | 68        | <b>70.2</b>        | 66.8        | 66.7        |

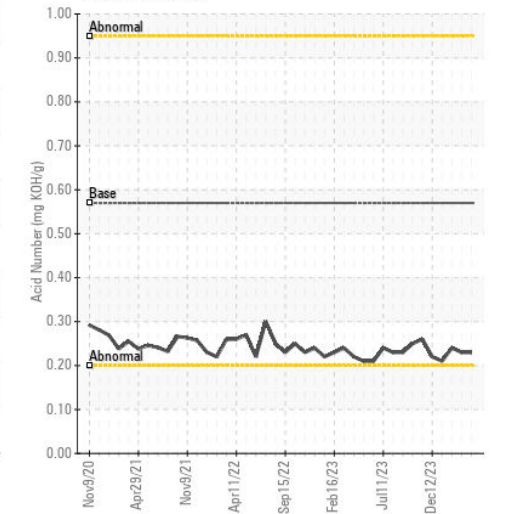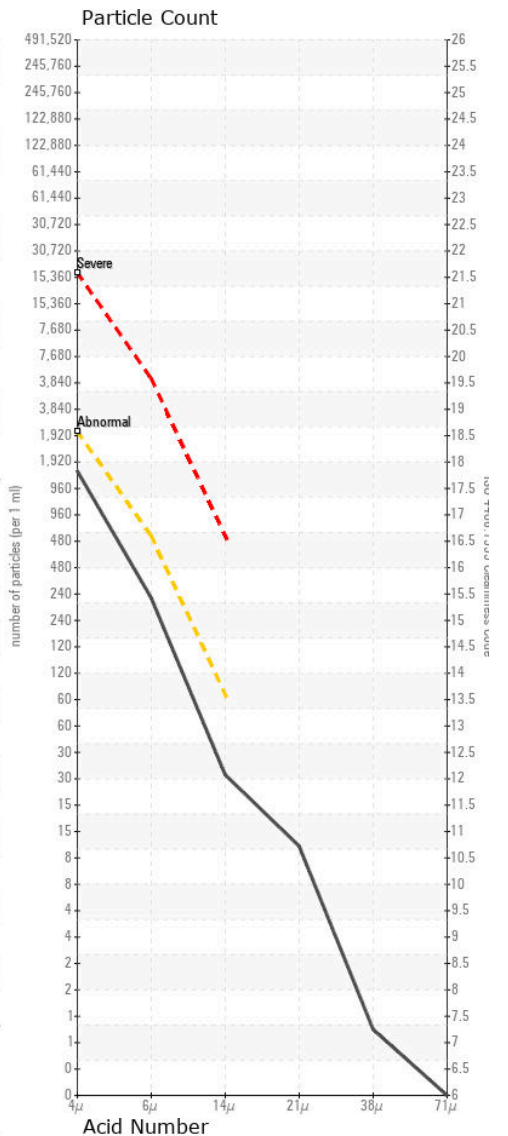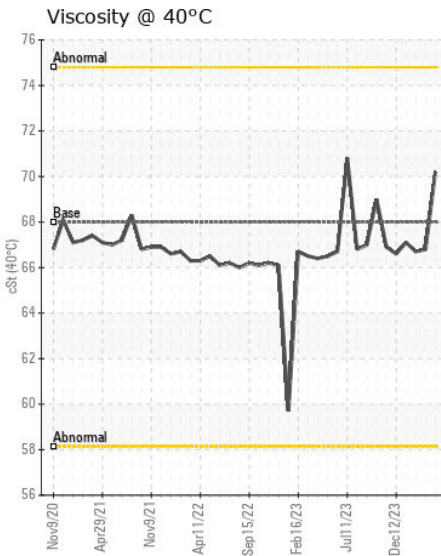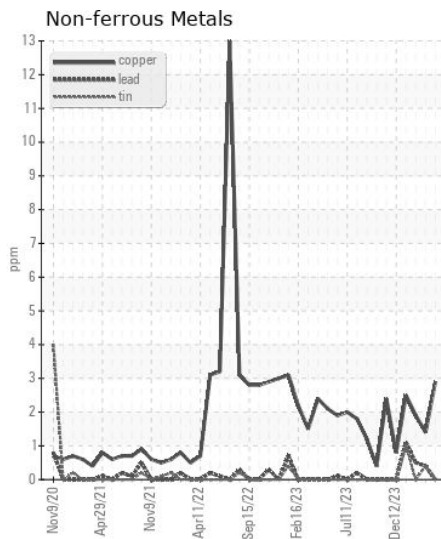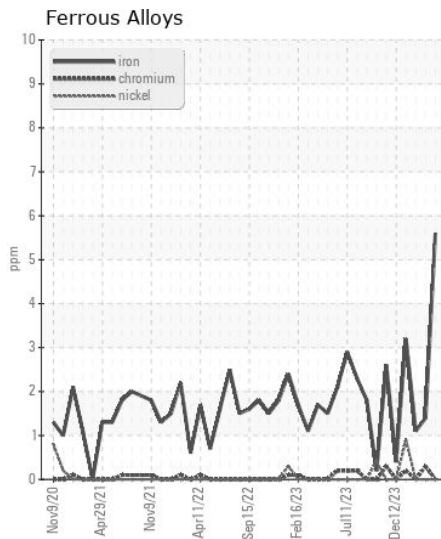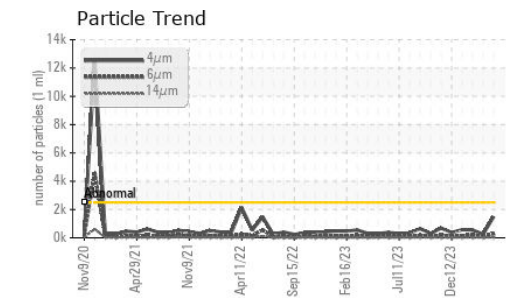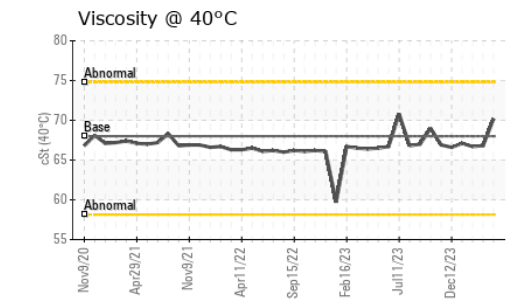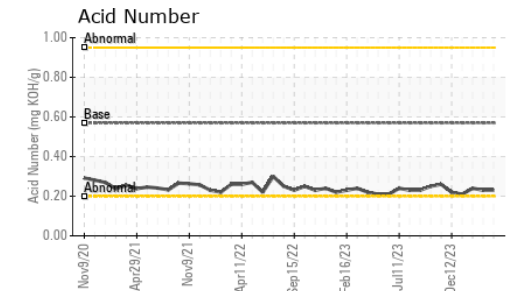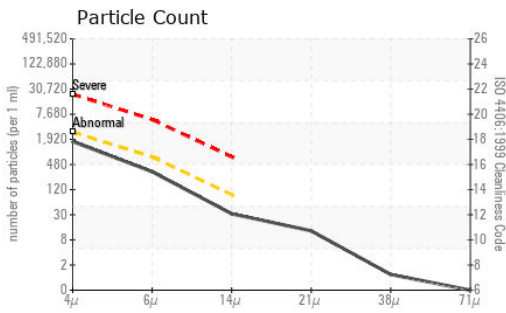

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0895069  
**Lab Number** : 06145282  
**Unique Number** : 10970090  
**Test Package** : IND 2  
**Received** : 10 Apr 2024  
**Tested** : 12 Apr 2024  
**Diagnosed** : 12 Apr 2024 - Wes Davis

**J.M. Huber Corporation**  
 PO BOX 38  
 CRYSTAL HILL, VA  
 US 24539  
 Contact: Ted Hudson  
 ted.hudson@huber.com  
 T: (434)476-6628  
 F: (434)476-8133

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)