



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO 12710
Component
Rear Differential
Fluid
SHELL SPIRAX HD 75W90 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0888377	WC0760377	WC0567189
Sample Date		Client Info		01 Apr 2024	18 Apr 2023	12 Apr 2022
Machine Age	mls	Client Info		575960	553350	509390
Oil Age	mls	Client Info		277660	255050	211090
Filter Age	mls	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	106	100	99
Chromium	ppm	ASTM D5185m	>10	<1	<1	<1
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		<1	0	<1
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m	>25	2	2	2
Lead	ppm	ASTM D5185m	>25	0	0	0
Copper	ppm	ASTM D5185m	>100	1	1	1
Tin	ppm	ASTM D5185m	>10	<1	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>75	44	45	38
Potassium	ppm	ASTM D5185m	>20	2	<1	2
Water		WC Method	>.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	NEG

FLUID CONDITION


The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		3	3	<1
Boron	ppm	ASTM D5185m		263	247	258
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	<1
Manganese	ppm	ASTM D5185m		4	4	4
Magnesium	ppm	ASTM D5185m		1	2	0
Calcium	ppm	ASTM D5185m		12	6	6
Phosphorus	ppm	ASTM D5185m		1463	1427	1485
Zinc	ppm	ASTM D5185m		7	8	2
Sulfur	ppm	ASTM D5185m		25044	28493	23681
Visc @ 40°C	cSt	ASTM D445	100	102	101	100


Viscosity @ 40°C

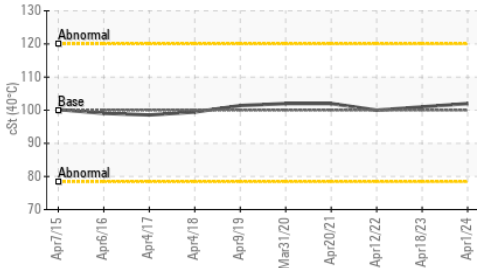


Ferrous Alloys

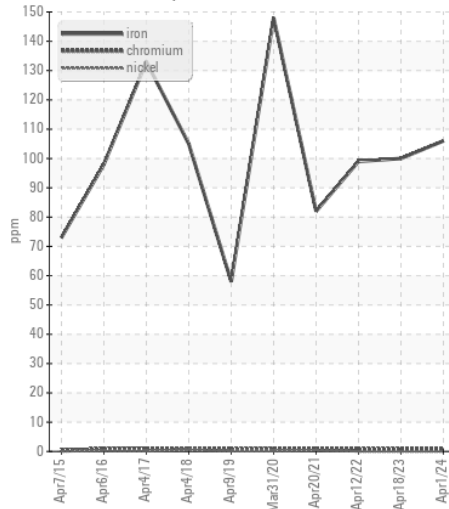

Non-ferrous Metals

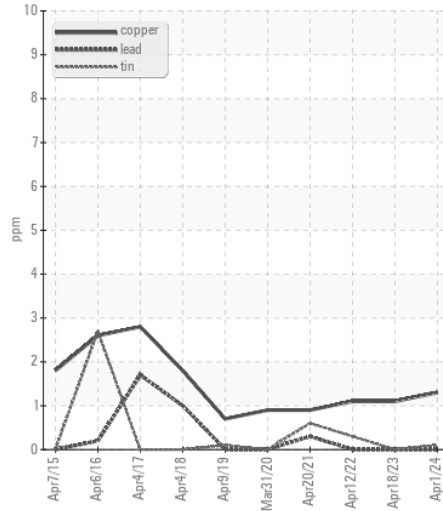

Viscosity @ 40°C

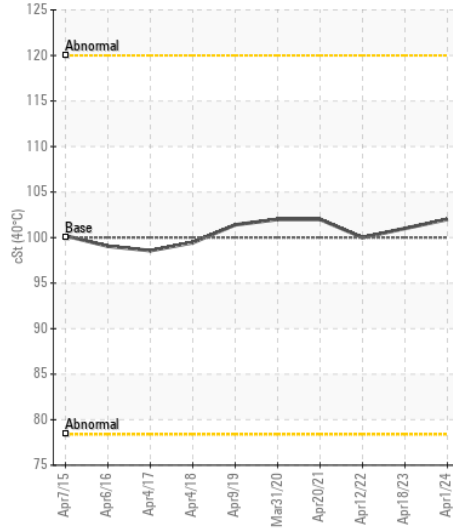

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0888377
Lab Number : 06145449
Unique Number : 10970257
Test Package : FLEET
Received : 10 Apr 2024
Tested : 11 Apr 2024
Diagnosed : 14 Apr 2024 - Don Baldrige

NOKOMIS - PGT INDUSTRIES INC
 1044 ENDEAVOR CT
 NOKOMIS, FL
 US 34275
 Contact: BILL SCHULER
 wschuler@pgtindustries.com
 T: (800)282-6019
 F: (941)484-1833

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)