



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR LH30M 151954-1253
Component
Swing Drive
Fluid
LIEBHERR GEAR BASIC 90 LS (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0244722	---	---
Sample Date		Client Info		01 Apr 2024	---	---
Machine Age	hrs	Client Info		595	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>1450	234	---	---
Chromium	ppm	ASTM D5185m	>11	2	---	---
Nickel	ppm	ASTM D5185m	>3	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>4	2	---	---
Lead	ppm	ASTM D5185m	>4	<1	---	---
Copper	ppm	ASTM D5185m	>542	85	---	---
Tin	ppm	ASTM D5185m	>38	7	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>15	11	---	---
Potassium	ppm	ASTM D5185m	>20	3	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		3	---	---
Boron	ppm	ASTM D5185m	0	9	---	---
Barium	ppm	ASTM D5185m	0	11	---	---
Molybdenum	ppm	ASTM D5185m	0	0	---	---
Manganese	ppm	ASTM D5185m	0	3	---	---
Magnesium	ppm	ASTM D5185m	<1	2	---	---
Calcium	ppm	ASTM D5185m	<1	30	---	---
Phosphorus	ppm	ASTM D5185m	2143	2319	---	---
Zinc	ppm	ASTM D5185m	<1	27	---	---
Sulfur	ppm	ASTM D5185m	23468	26625	---	---
Visc @ 40°C	cSt	ASTM D445	170	189	---	---

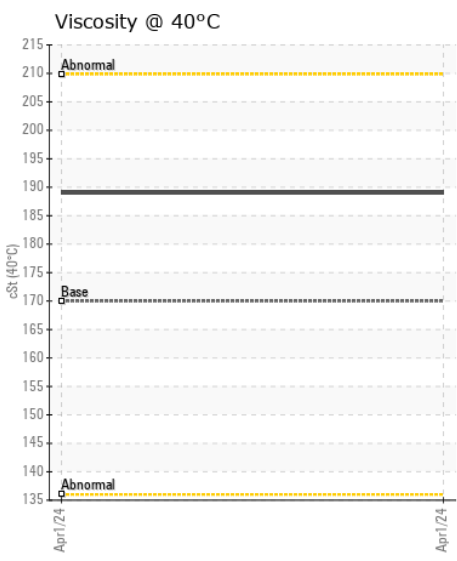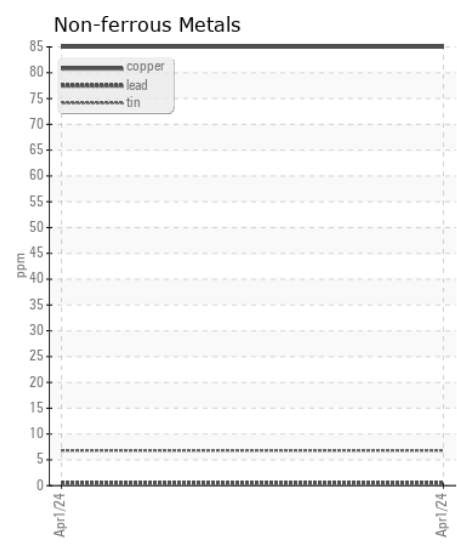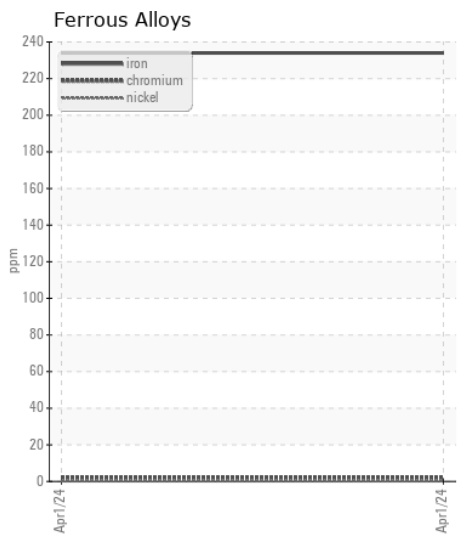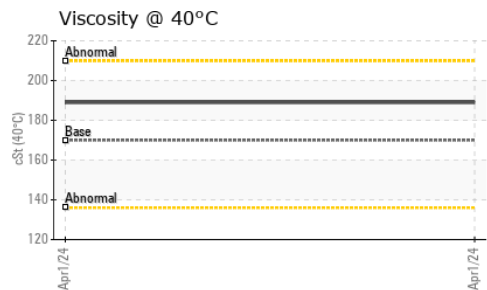

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LH0244722
Lab Number : 06145478
Unique Number : 10970286
Test Package : CONST
Received : 10 Apr 2024
Tested : 12 Apr 2024
Diagnosed : 14 Apr 2024 - Don Baldrige

RECO EQUIPMENT INC
 8075 PRODUCTION DRIVE
 FLORENCE, KY
 US 41042
 Contact: TRACEY EDGERTON
 tedgerton@recoequip.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)