



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**BUS 754**  
 Component  
**Diesel Engine**  
 Fluid  
**CHEVRON DELO 400 LE 15W40 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>DC0031947</b>	DC0028367	---
Sample Date		Client Info		<b>01 Apr 2024</b>	23 Jun 2023	---
Machine Age	mls	Client Info		<b>39855</b>	11666	---
Oil Age	mls	Client Info		<b>0</b>	0	---
Filter Age	mls	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Changed</b>	Changed	---
Filter Changed		Client Info		<b>Changed</b>	Changed	---
Sample Status				<b>NORMAL</b>	ATTENTION	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>20</b>	49	---
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	2	---
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	3	---
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	<1	---
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	5	---
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

## CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>7</b>	16	---
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	4	---
Fuel		WC Method	>5	<b>&lt;1.0</b>	0.5	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol		WC Method		<b>NEG</b>	NEG	---
Soot %	%	*ASTM D7844	>3	<b>0.3</b>	0.5	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.5</b>	9.6	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.4</b>	22.5	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>6</b>	4	---
Boron	ppm	ASTM D5185m		<b>308</b>	60	---
Barium	ppm	ASTM D5185m		<b>&lt;1</b>	7	---
Molybdenum	ppm	ASTM D5185m		<b>83</b>	44	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	2	---
Magnesium	ppm	ASTM D5185m		<b>409</b>	522	---
Calcium	ppm	ASTM D5185m		<b>1495</b>	1646	---
Phosphorus	ppm	ASTM D5185m	1200	<b>1035</b>	752	---
Zinc	ppm	ASTM D5185m	1300	<b>1290</b>	944	---
Sulfur	ppm	ASTM D5185m	3200	<b>3757</b>	2824	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>15.2</b>	20.9	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.6	<b>6.6</b>	9.1	---
Visc @ 100°C	cSt	ASTM D445	15.7	<b>13.3</b>	11.8	---

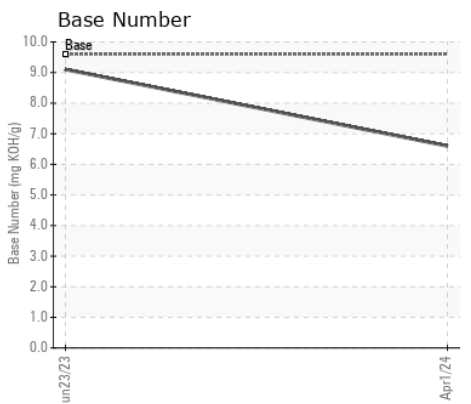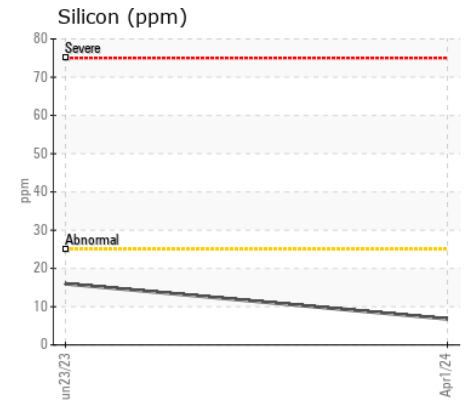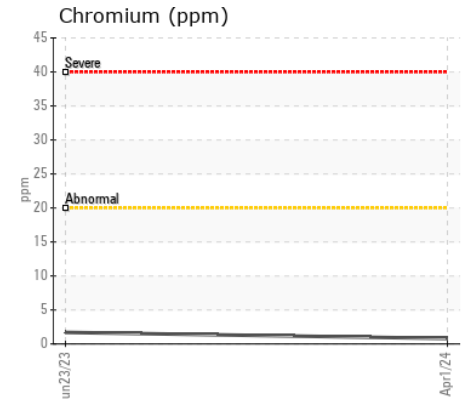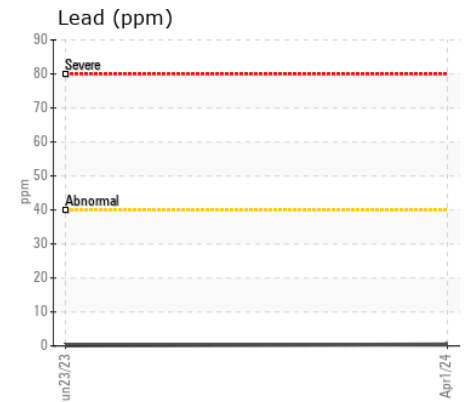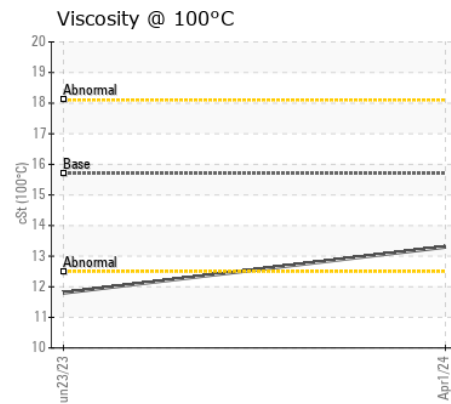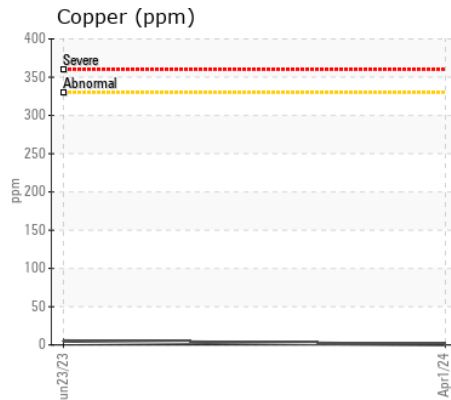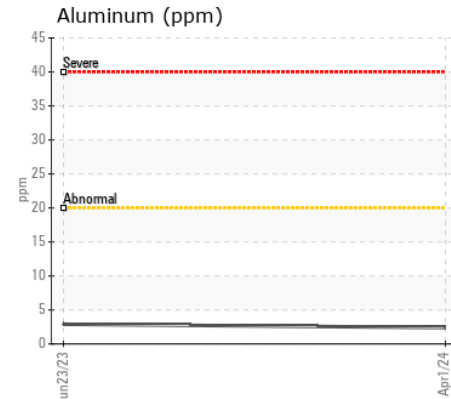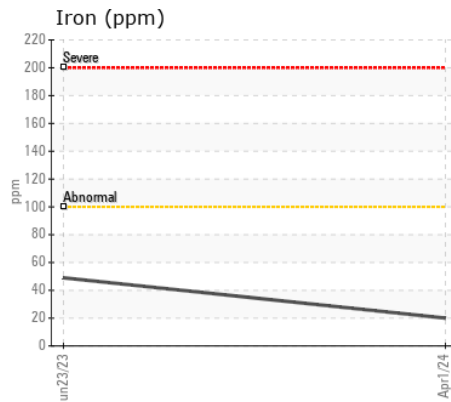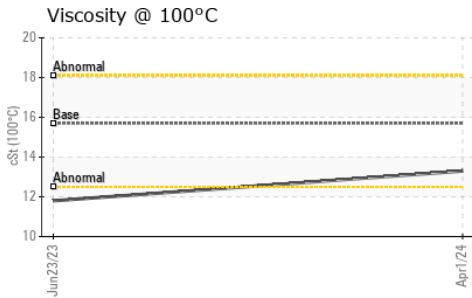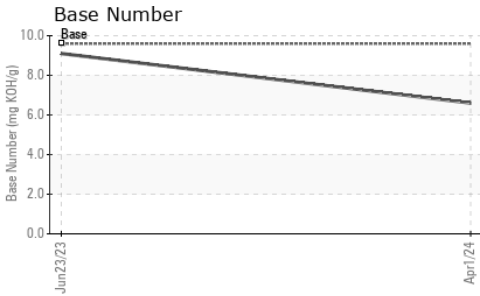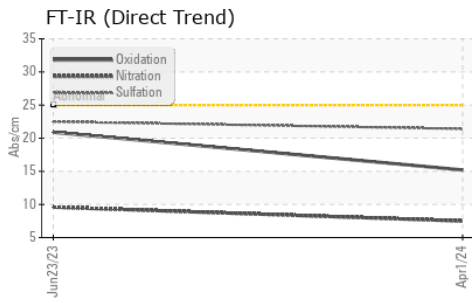

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : DC0031947 **Received** : 11 Apr 2024  
**Lab Number** : 06145628 **Tested** : 12 Apr 2024  
**Unique Number** : 10970436 **Diagnosed** : 14 Apr 2024 - Don Baldrige  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**KELLER BUS**  
 4472 GALLANT GREEN RD  
 WALDORF, MD  
 US 20601  
 Contact: Paul Or Larry  
 Lking@kellerbus.com  
 T: (301)645-5734  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)