



PacLease

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
846-4944
 Component
Diesel Engine
 Fluid
MOBIL DELVAC 1300 SUPER15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RPL0018125	RPL0016904	RPL0015122
Sample Date		Client Info		02 Apr 2024	04 Jan 2024	26 Sep 2023
Machine Age	mls	Client Info		0	52078	40280
Oil Age	mls	Client Info		20582	11798	40280
Filter Age	mls	Client Info		20582	11798	40280
Oil Changed		Client Info		Not Changd	Not Changd	Changed
Filter Changed		Client Info		Not Changd	Not Changd	Changed
Sample Status				NORMAL	NORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	19	11	59
Chromium	ppm	ASTM D5185m	>20	1	<1	4
Nickel	ppm	ASTM D5185m	>4	<1	<1	1
Titanium	ppm	ASTM D5185m		<1	0	<1
Silver	ppm	ASTM D5185m	>3	0	<1	<1
Aluminum	ppm	ASTM D5185m	>20	11	7	27
Lead	ppm	ASTM D5185m	>40	4	2	13
Copper	ppm	ASTM D5185m	>330	4	3	26
Tin	ppm	ASTM D5185m	>15	2	1	5
Vanadium	ppm	ASTM D5185m		<1	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	9	8	▲ 35
Potassium	ppm	ASTM D5185m	>20	26	15	96
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.3	0.2	0.5
Nitration	Abs/cm	*ASTM D7624	>20	10.0	8.5	11.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.9	21.2	25.1
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	2	7
Boron	ppm	ASTM D5185m	0	46	60	24
Barium	ppm	ASTM D5185m	0	<1	0	5
Molybdenum	ppm	ASTM D5185m	0	78	69	16
Manganese	ppm	ASTM D5185m		1	<1	6
Magnesium	ppm	ASTM D5185m	0	671	603	707
Calcium	ppm	ASTM D5185m		1645	1399	1320
Phosphorus	ppm	ASTM D5185m		810	776	714
Zinc	ppm	ASTM D5185m		989	885	860
Sulfur	ppm	ASTM D5185m		3381	2697	2620
Oxidation	Abs/.1mm	*ASTM D7414	>25	21.8	19.5	23.3
Base Number (BN)	mg KOH/g	ASTM D2896	9.4	6.8	8.1	5.1
Visc @ 100°C	cSt	ASTM D445	14	12.7	12.7	● 11.6

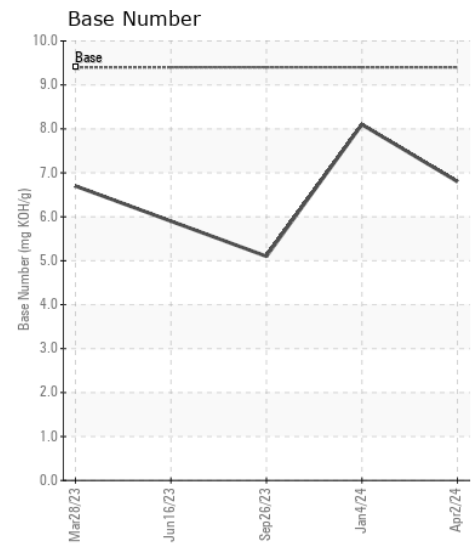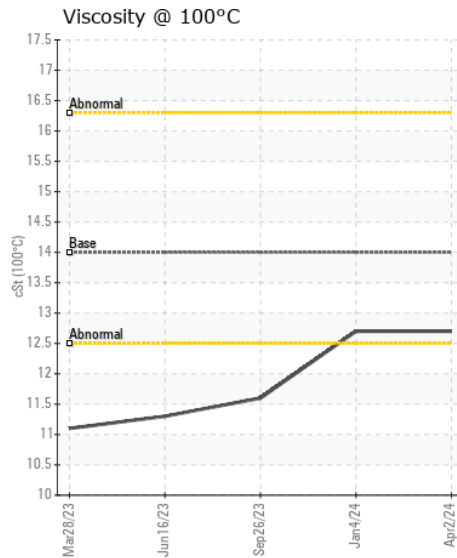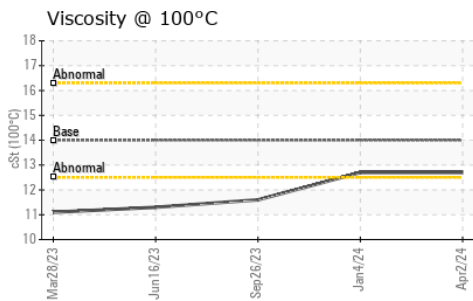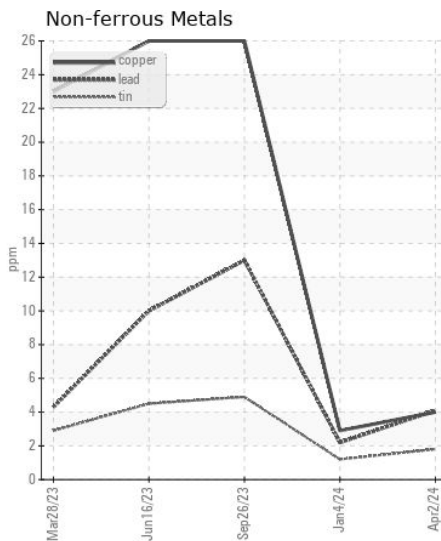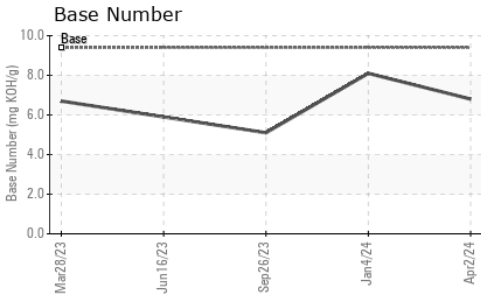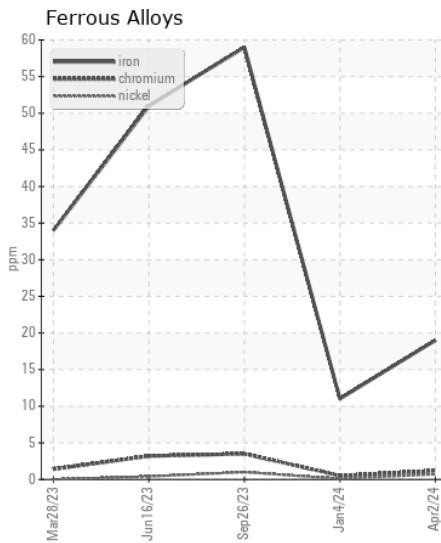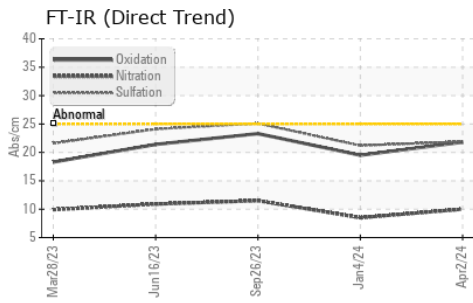

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : RPL0018125
 Lab Number : 06145649
 Unique Number : 10970457
 Test Package : FLEET

Received : 11 Apr 2024
 Tested : 12 Apr 2024
 Diagnosed : 12 Apr 2024 - Wes Davis

RTL PACLEASE - 7007 - Fontana
 3121 South Riverside
 Bloomington, CA
 US 92316
 Contact: Rudy Trevizo
 TrevizoR@RushEnterprises.Com
 T: (909)829-1044
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)