



WEAR	NORMAL
CONTAMINATION	SEVERE
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 5205 1LV5205C821046

Component
Hydraulic System

Fluid
TDH FLUID SAE 75W80 (--- QTS)

RECOMMENDATION

Check seals and/or filters for points of contaminant entry. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. We recommend you service the filters on this component. Resample in 30-45 days to monitor this situation. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) TDH FLUID SAE 75W80. Please confirm.

WEAR

All component wear rates are normal.










CONTAMINATION

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

FLUID CONDITION

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0183561	---	---
Sample Date		Client Info		01 Apr 2024	---	---
Machine Age	hrs	Client Info		611	---	---
Oil Age	hrs	Client Info		38	---	---
Filter Age	hrs	Client Info		38	---	---
Oil Changed		Client Info		Not Chngd	---	---
Filter Changed		Client Info		Not Chngd	---	---
Sample Status				SEVERE	---	---
PQ		ASTM D8184		33	---	---
Iron	ppm	ASTM D5185m	>20	15	---	---
Chromium	ppm	ASTM D5185m	>10	1	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m	>10	<1	---	---
Lead	ppm	ASTM D5185m	>10	0	---	---
Copper	ppm	ASTM D5185m	>75	6	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Silicon	ppm	ASTM D5185m	>20	9	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Water		WC Method	>0.1	NEG	---	---
Particles >4µm		ASTM D7647	>5000	▲ 92501	---	---
Particles >6µm		ASTM D7647	>1300	▲ 12053	---	---
Particles >14µm		ASTM D7647	>160	31	---	---
Particles >21µm		ASTM D7647	>40	6	---	---
Particles >38µm		ASTM D7647	>10	0	---	---
Particles >71µm		ASTM D7647	>3	0	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	▲ 24/21/12	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---
Sodium	ppm	ASTM D5185m		3	---	---
Boron	ppm	ASTM D5185m	10	9	---	---
Barium	ppm	ASTM D5185m	10	0	---	---
Molybdenum	ppm	ASTM D5185m	10	1	---	---
Manganese	ppm	ASTM D5185m		1	---	---
Magnesium	ppm	ASTM D5185m	100	104	---	---
Calcium	ppm	ASTM D5185m	3500	3121	---	---
Phosphorus	ppm	ASTM D5185m	1150	943	---	---
Zinc	ppm	ASTM D5185m	1150	1096	---	---
Sulfur	ppm	ASTM D5185m	5000	3741	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045	2.25	1.26	---	---
Visc @ 40°C	cSt	ASTM D445	48	54.1	---	---

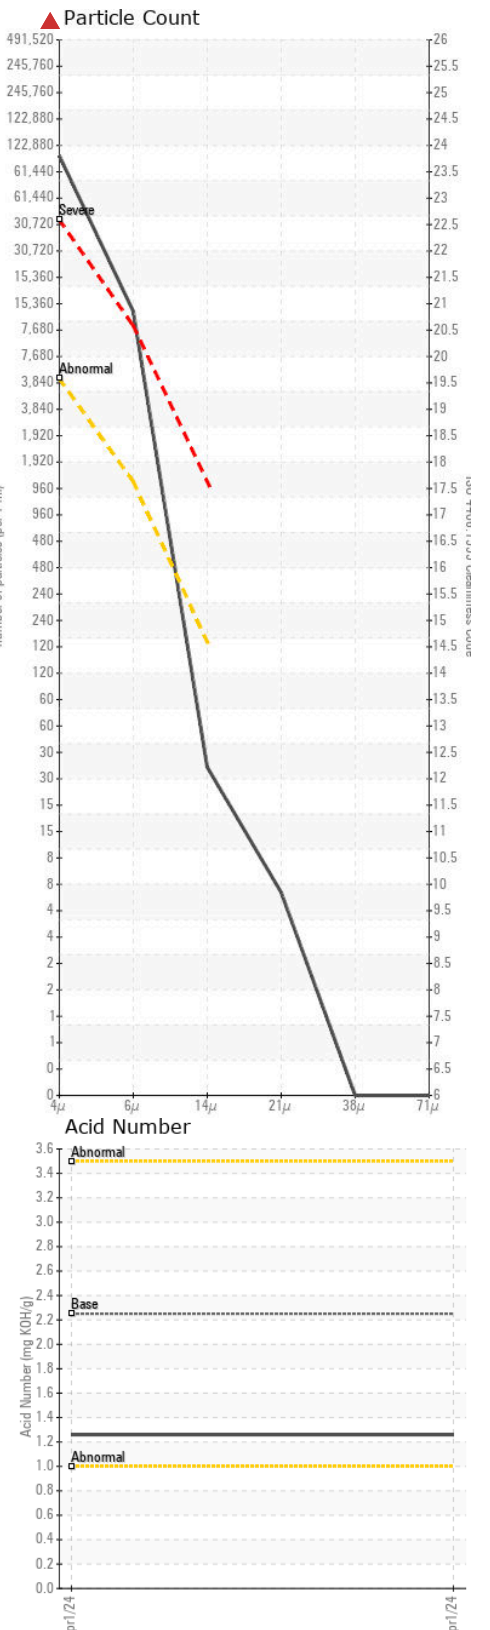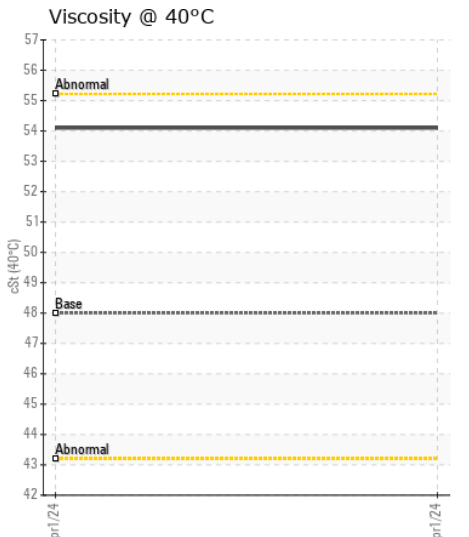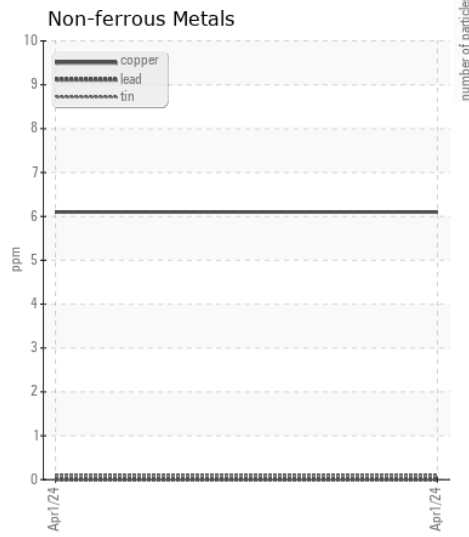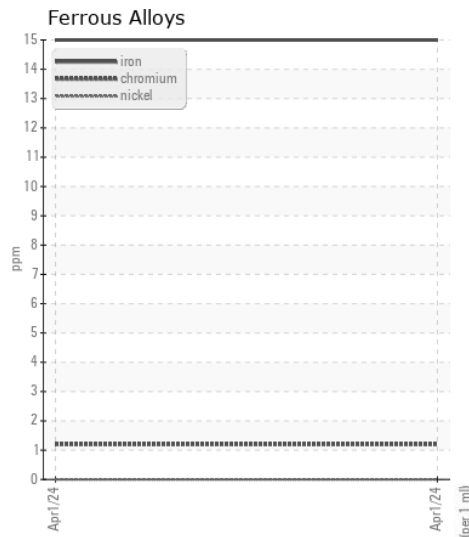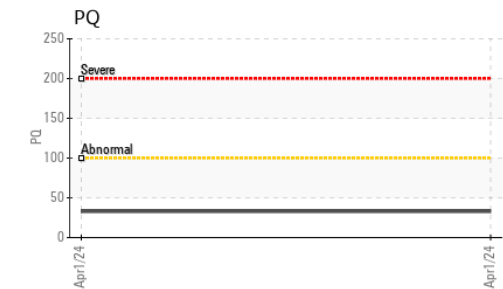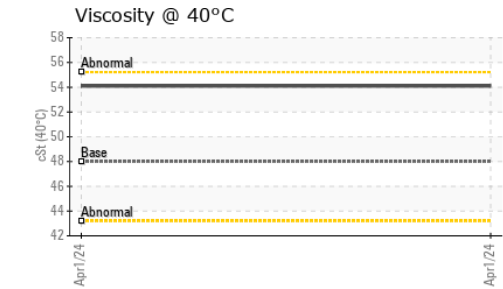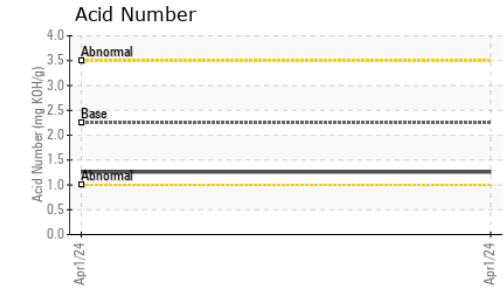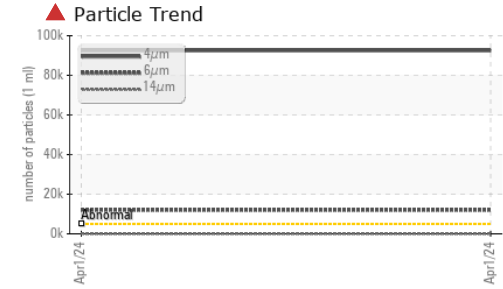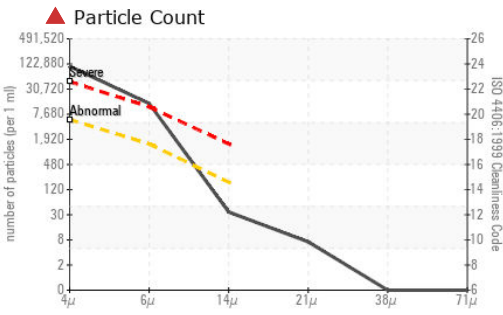

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0183561 **Received** : 11 Apr 2024
Lab Number : 06145762 **Tested** : 12 Apr 2024
Unique Number : 10975840 **Diagnosed** : 12 Apr 2024 - Wes Davis
Test Package : CONST (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - HARRISONBURG
 1332 GARBERS CHURCH RD
 HARRISONBURG, VA
 US 22801

Contact: ETHAN SHEETS
 ETHAN.SHEETS@JAMESRIVEREQUIPMENT.COM

T:
 F: