



# VOLVO

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**[675838 HERC RENTALS]**  
 Machine Id  
**VOLVO EC350EL 314592**  
 Component  
**Hydraulic System**  
 Fluid  
**VOLVO SUPER HYDRAULIC OIL 46 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>VCP437919</b>	---	---
Sample Date		Client Info		<b>08 Mar 2024</b>	---	---
Machine Age	hrs	Client Info		<b>1584</b>	---	---
Oil Age	hrs	Client Info		<b>1584</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Not Chngd</b>	---	---
Filter Changed		Client Info		<b>Changed</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>25	<b>5</b>	---	---
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	---	---
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>20	<b>0</b>	---	---
Lead	ppm	ASTM D5185m	>20	<b>0</b>	---	---
Copper	ppm	ASTM D5185m	>150	<b>35</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

### CONTAMINATION











The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>50	<b>3</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	---	---
Water		WC Method	>0.1	<b>NEG</b>	---	---
Particles >4µm		ASTM D7647	>40000	<b>8455</b>	---	---
Particles >6µm		ASTM D7647	>10000	<b>465</b>	---	---
Particles >14µm		ASTM D7647	>2500	<b>34</b>	---	---
Particles >21µm		ASTM D7647	>640	<b>9</b>	---	---
Particles >38µm		ASTM D7647	>160	<b>1</b>	---	---
Particles >71µm		ASTM D7647	>40	<b>0</b>	---	---
Oil Cleanliness		ISO 4406 (c)	>22/20/18	<b>20/16/12</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	---	---

### FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Boron	ppm	ASTM D5185m	14	<b>0</b>	---	---
Barium	ppm	ASTM D5185m	0.0	<b>&lt;1</b>	---	---
Molybdenum	ppm	ASTM D5185m	0.0	<b>0</b>	---	---
Manganese	ppm	ASTM D5185m	0.0	<b>0</b>	---	---
Magnesium	ppm	ASTM D5185m	2.6	<b>6</b>	---	---
Calcium	ppm	ASTM D5185m	49	<b>494</b>	---	---
Phosphorus	ppm	ASTM D5185m	354	<b>503</b>	---	---
Zinc	ppm	ASTM D5185m	419	<b>612</b>	---	---
Sulfur	ppm	ASTM D5185m	3719	<b>1674</b>	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.86</b>	---	---
Visc @ 40°C	cSt	ASTM D445	46	<b>44.2</b>	---	---

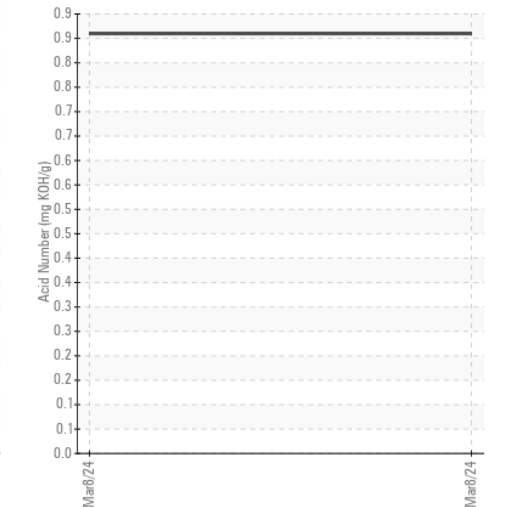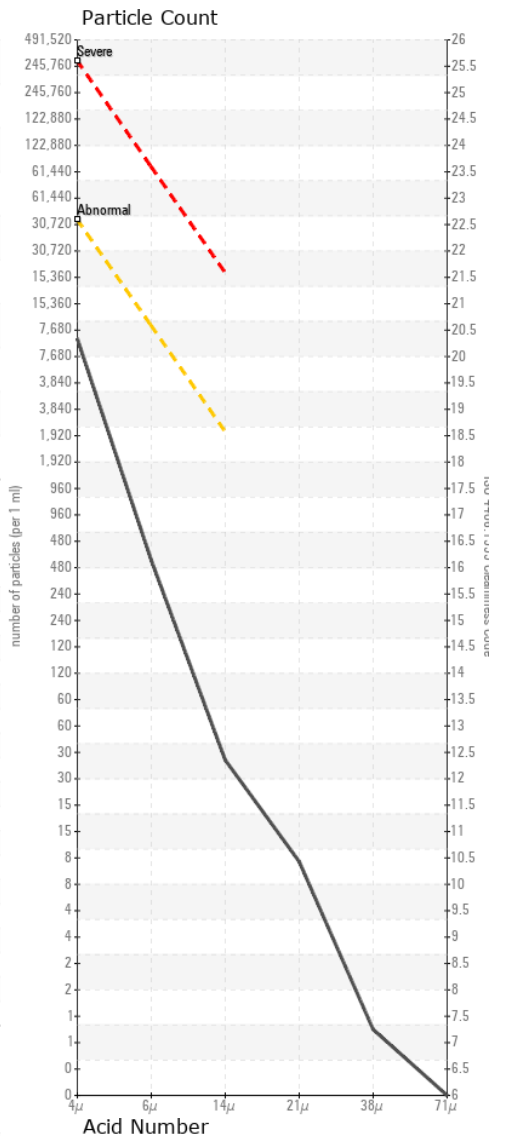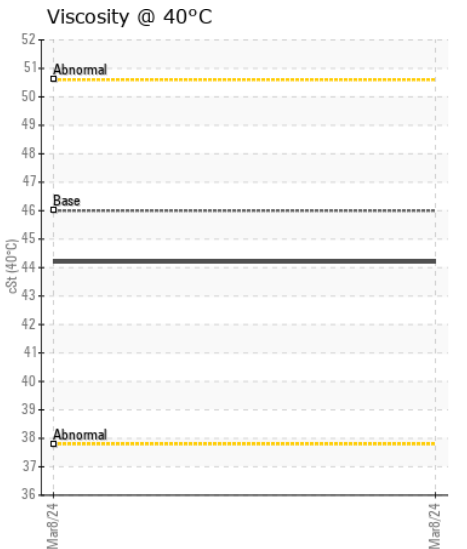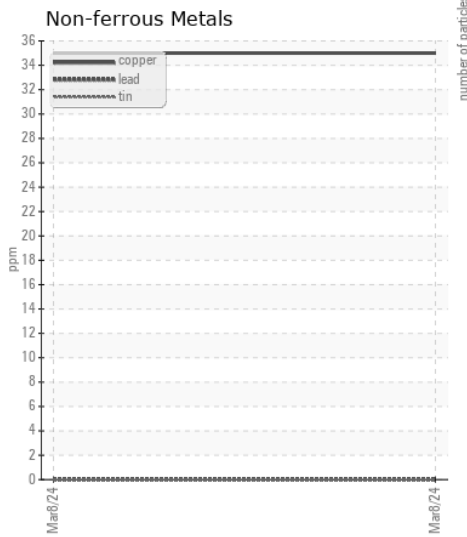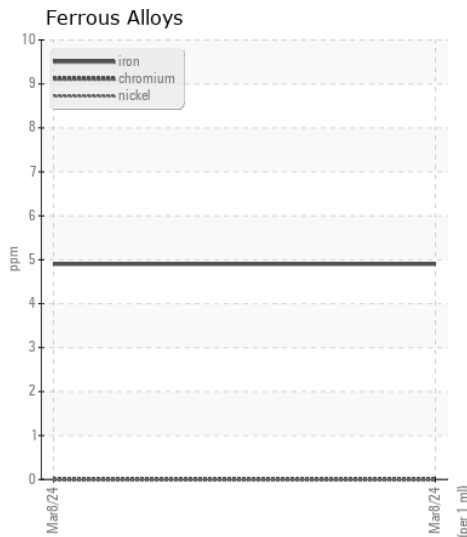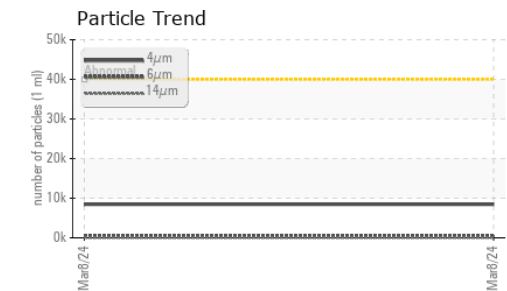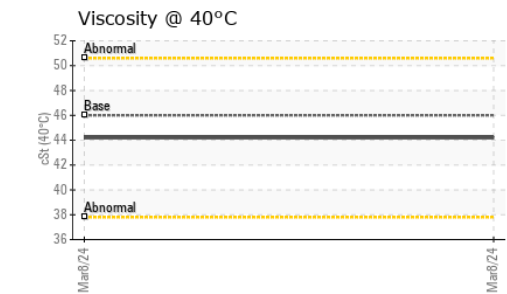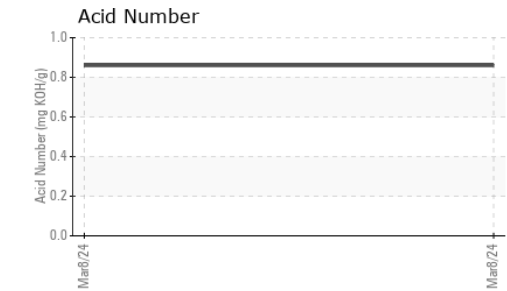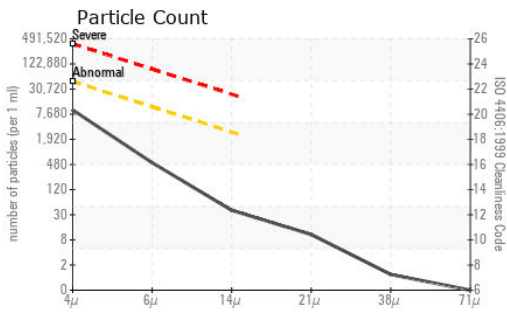

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP437919  
**Lab Number** : 06145797  
**Unique Number** : 10975875  
**Test Package** : MOB 2

**Received** : 11 Apr 2024  
**Tested** : 12 Apr 2024  
**Diagnosed** : 12 Apr 2024 - Wes Davis

ALTA EQUIPMENT/FLAGLER CONSTRUCTION EQUIPMENT LLC  
 8418 PALM RIVER ROAD  
 TAMPA, FL  
 US 33619  
 Contact: JOHN FARDELLA  
 john.fardella@altg.com  
 T: (813)630-0077  
 F: (813)630-2233

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)