



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area

[687484]

Machine Id

VOLVO A30G 752866

Component

Hydraulic System

Fluid

VOLVO SUPER HYDRAULIC OIL 46 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP445394	VCP396907	---
Sample Date		Client Info		15 Mar 2024	05 Jul 2023	---
Machine Age	hrs	Client Info		2208	1096	---
Oil Age	hrs	Client Info		2208	1096	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Not Changed	Not Changed	---
Filter Changed		Client Info		Changed	Not Changed	---
Sample Status				NORMAL	ATTENTION	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	4	4	---
Chromium	ppm	ASTM D5185m	>20	0	0	---
Nickel	ppm	ASTM D5185m	>10	0	0	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>20	0	<1	---
Lead	ppm	ASTM D5185m	>20	<1	2	---
Copper	ppm	ASTM D5185m	>150	2	3	---
Tin	ppm	ASTM D5185m	>20	0	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION










The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>20	3	4	---
Potassium	ppm	ASTM D5185m	>20	0	<1	---
Water		WC Method	>0.1	NEG	NEG	---
Particles >4µm		ASTM D7647		3620	6416	---
Particles >6µm		ASTM D7647	>5000	1093	2294	---
Particles >14µm		ASTM D7647	>160	105	241	---
Particles >21µm		ASTM D7647	>40	33	65	---
Particles >38µm		ASTM D7647	>10	1	1	---
Particles >71µm		ASTM D7647	>3	0	0	---
Oil Cleanliness		ISO 4406 (c)	>-/19/14	19/17/14	20/18/15	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		1	0	---
Boron	ppm	ASTM D5185m	14	0	0	---
Barium	ppm	ASTM D5185m	0.0	0	0	---
Molybdenum	ppm	ASTM D5185m	0.0	0	0	---
Manganese	ppm	ASTM D5185m	0.0	0	0	---
Magnesium	ppm	ASTM D5185m	2.6	<1	0	---
Calcium	ppm	ASTM D5185m	49	64	60	---
Phosphorus	ppm	ASTM D5185m	354	296	328	---
Zinc	ppm	ASTM D5185m	419	364	430	---
Sulfur	ppm	ASTM D5185m	3719	2001	2140	---
Acid Number (AN)	mg KOH/g	ASTM D8045		0.40	0.40	---
Visc @ 40°C	cSt	ASTM D445	46	43.3	44.0	---

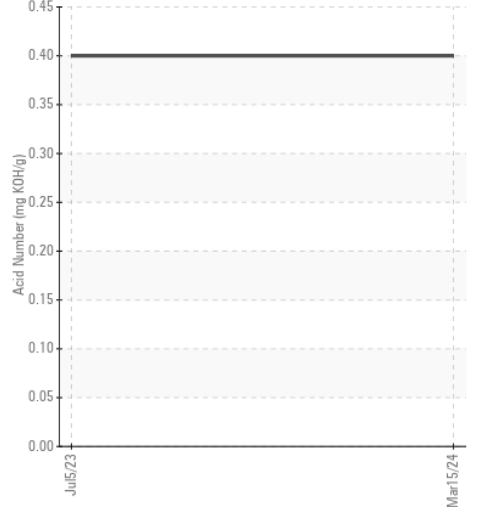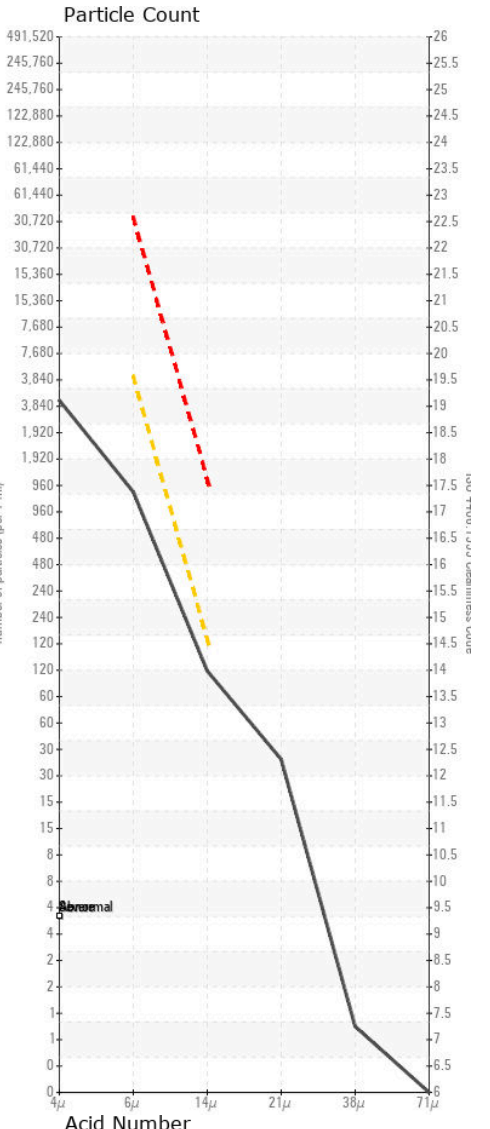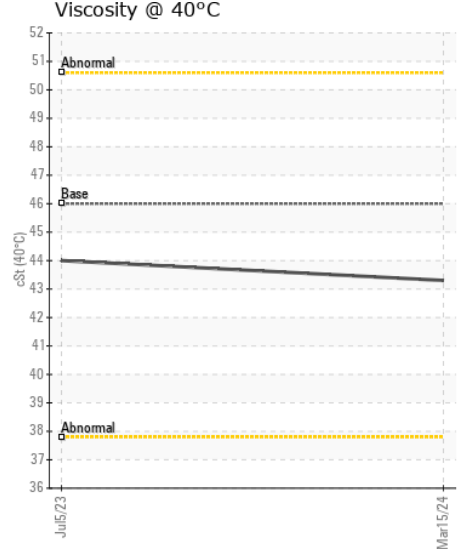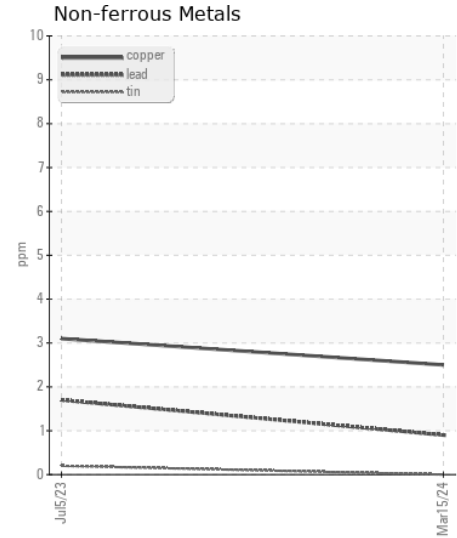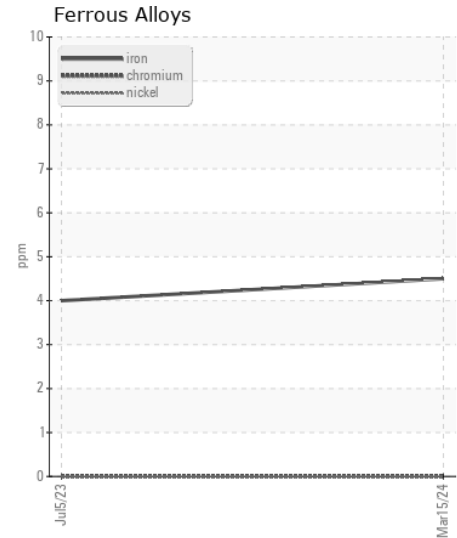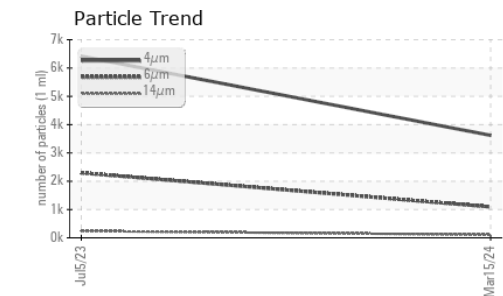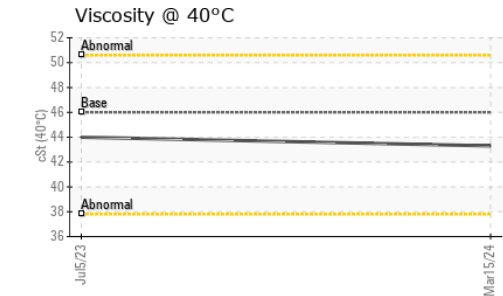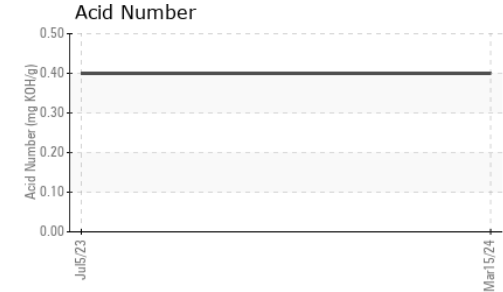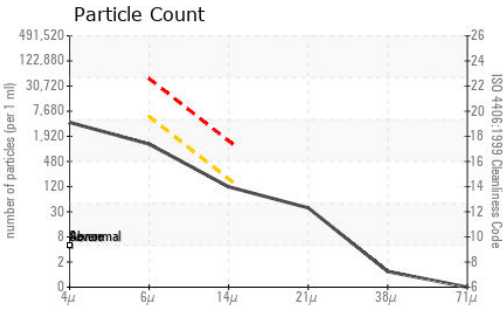

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP445394 **Received** : 11 Apr 2024
Lab Number : 06145805 **Tested** : 12 Apr 2024
Unique Number : 10975883 **Diagnosed** : 12 Apr 2024 - Wes Davis
Test Package : MOB 2

RIPA AND ASSOCIATES
 10149 FISHER AVENUE
 TAMPA, FL
 US 33619
 Contact: PM Services
 PMServices@ripaconstruction.com
 T:
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)