



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**[16W15975]**  
 Machine Id  
**CASE 721F C327175 (S/N NCF216455)**  
 Component  
**Transmission**  
 Fluid  
**CASE AKCELA NEXPLORE 10W30 (36 QTS)**

### RECOMMENDATION

Resample at the next service interval to monitor. ( Customer Sample Comment: 16W15975 )

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0206924</b>	---	---
Sample Date		Client Info		<b>09 Apr 2024</b>	---	---
Machine Age	hrs	Client Info		<b>4465</b>	---	---
Oil Age	hrs	Client Info		<b>4465</b>	---	---
Filter Age	hrs	Client Info		<b>400</b>	---	---
Oil Changed		Client Info		<b>Not Changed</b>	---	---
Filter Changed		Client Info		<b>Changed</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

### WEAR

All component wear rates are normal.

PQ		ASTM D8184		<b>20</b>	---	---
Iron	ppm	ASTM D5185m	>200	<b>20</b>	---	---
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Aluminum	ppm	ASTM D5185m	>50	<b>1</b>	---	---
Lead	ppm	ASTM D5185m	>50	<b>1</b>	---	---
Copper	ppm	ASTM D5185m	>200	<b>3</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

### CONTAMINATION







There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>50	<b>2</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	---	---
Water		WC Method	>0.1	<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	---	---

### FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>0</b>	---	---
Boron	ppm	ASTM D5185m		<b>6</b>	---	---
Barium	ppm	ASTM D5185m		<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>3</b>	---	---
Manganese	ppm	ASTM D5185m		<b>2</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>18</b>	---	---
Calcium	ppm	ASTM D5185m		<b>1243</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>619</b>	---	---
Zinc	ppm	ASTM D5185m		<b>642</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>2185</b>	---	---
Visc @ 40°C	cSt	ASTM D445	61.4	<b>44.5</b>	---	---

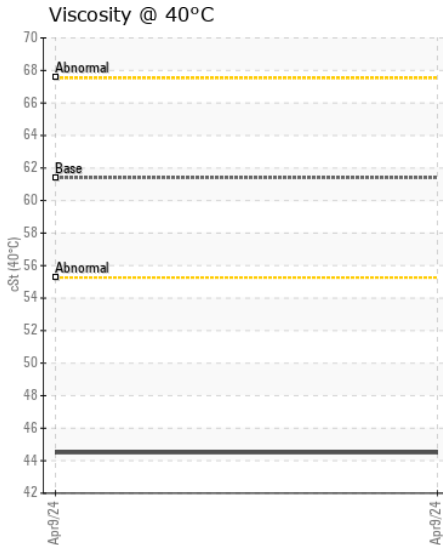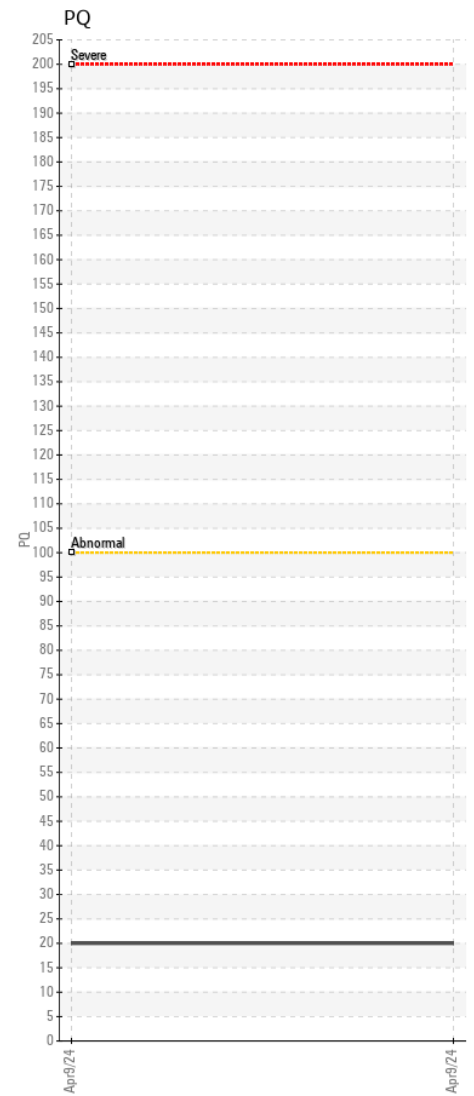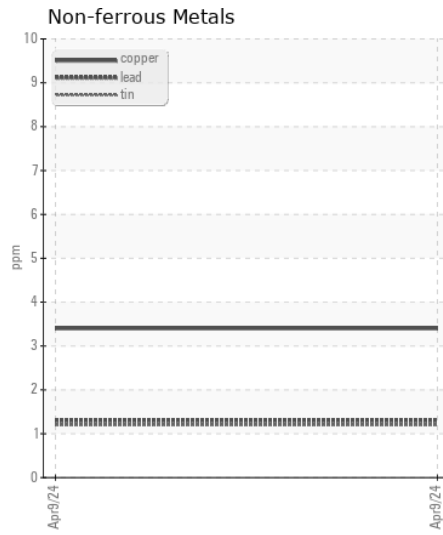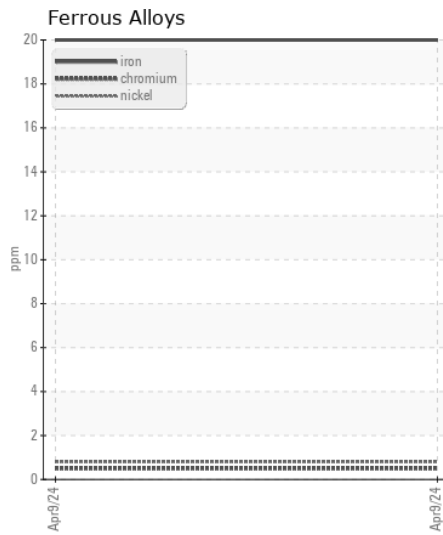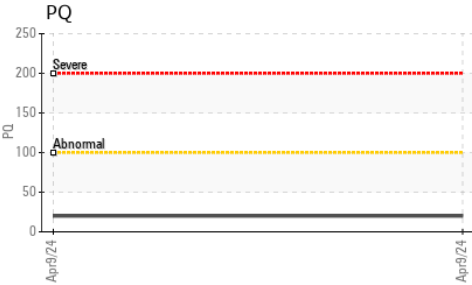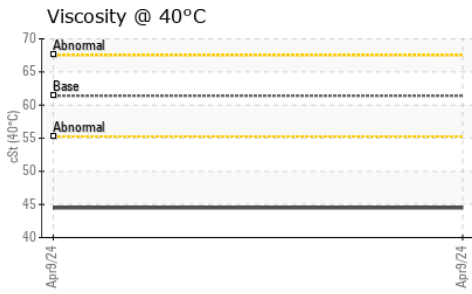

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0206924 **Received** : 11 Apr 2024  
**Lab Number** : 06146081 **Tested** : 12 Apr 2024  
**Unique Number** : 10976159 **Diagnosed** : 15 Apr 2024 - Sean Felton  
**Test Package** : CONST ( Additional Tests: PQ )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**JRE - CASTLE HAYNE**  
 113 CROWATAN ROAD  
 CASTLE HAYNE, NC  
 US 28429-5819

Contact: Jacob Harvey  
 jacob.harvey@jamesriverequipment.com

T:  
 F: