



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[05W45935]
 Machine Id
JOHN DEERE 350GLC 1FF350GXALF814428
 Component
Swing Drive Gear Case
 Fluid
JOHN DEERE GL-5 80W90 (13 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0211000	JR0125957	---
Sample Date		Client Info		08 Apr 2024	30 Aug 2023	---
Machine Age	hrs	Client Info		4474	3876	---
Oil Age	hrs	Client Info		598	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Not Changed	Changed	---
Filter Changed		Client Info		Not Changed	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		33	30	---
Iron	ppm	ASTM D5185m	>200	95	135	---
Chromium	ppm	ASTM D5185m	>10	2	2	---
Nickel	ppm	ASTM D5185m	>10	<1	0	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m		1	0	---
Lead	ppm	ASTM D5185m		1	0	---
Copper	ppm	ASTM D5185m		1	<1	---
Tin	ppm	ASTM D5185m		1	0	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION






There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m		8	18	---
Potassium	ppm	ASTM D5185m	>20	4	1	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	0	---
Boron	ppm	ASTM D5185m		26	25	---
Barium	ppm	ASTM D5185m		4	4	---
Molybdenum	ppm	ASTM D5185m		1	0	---
Manganese	ppm	ASTM D5185m		2	3	---
Magnesium	ppm	ASTM D5185m		1	1	---
Calcium	ppm	ASTM D5185m		15	8	---
Phosphorus	ppm	ASTM D5185m		441	504	---
Zinc	ppm	ASTM D5185m		8	12	---
Sulfur	ppm	ASTM D5185m		22765	16304	---
Visc @ 40°C	cSt	ASTM D445		151	183	---

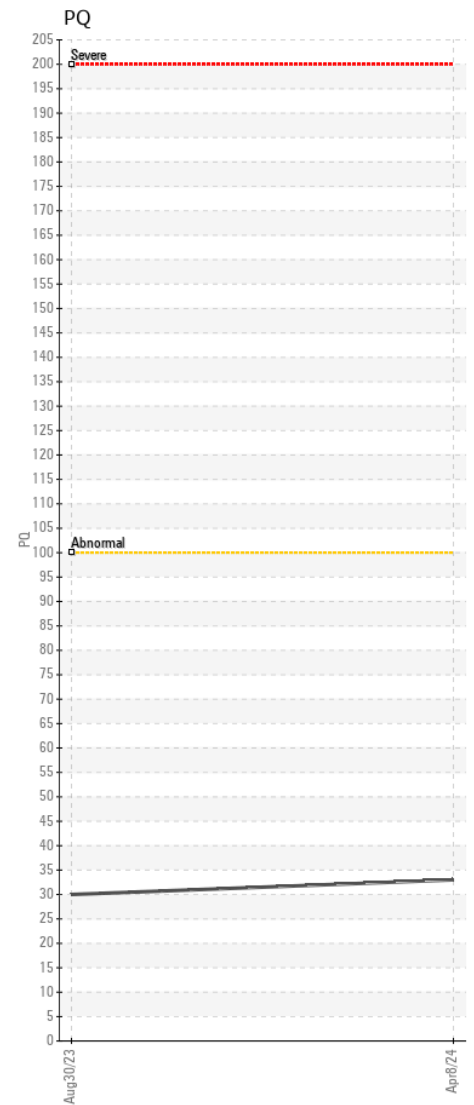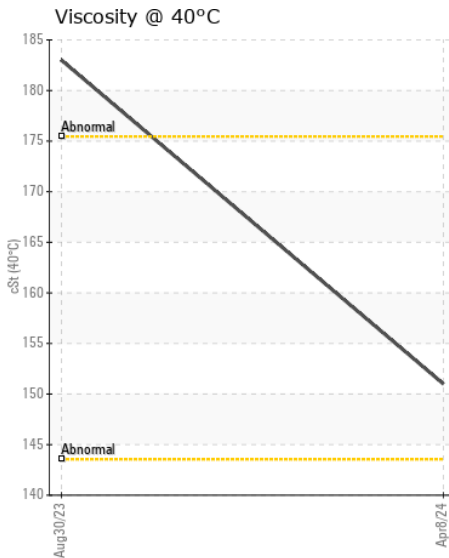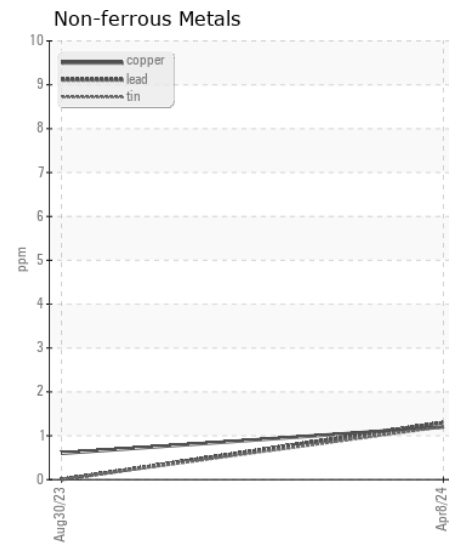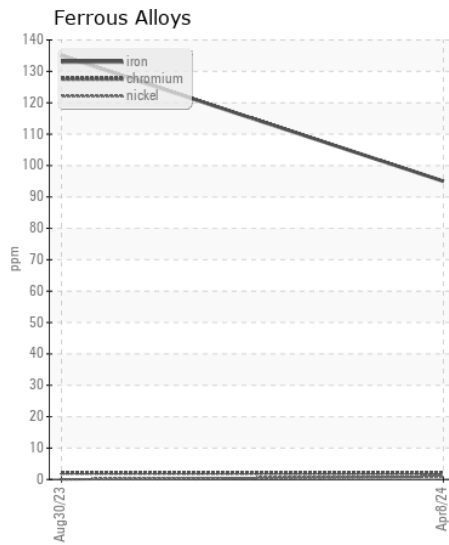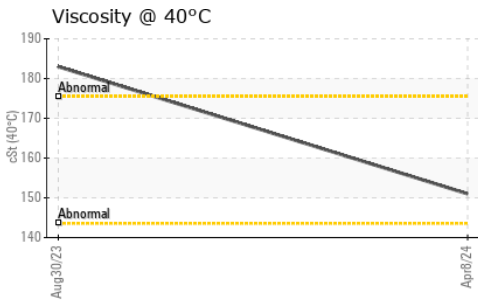

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0211000 **Received** : 11 Apr 2024
Lab Number : 06146118 **Tested** : 12 Apr 2024
Unique Number : 10976196 **Diagnosed** : 15 Apr 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

JRE - MANASSAS PARK
 9107 OWENS DRIVE
 MANASSAS PARK, VA
 US 20111

Contact: DON VEST
 dvest@jamesriverequipment.com
 T: (703)631-8500
 F: (703)631-4715

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)