



WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
SAKAI 540D 618
 Component
Differential
 Fluid
GEAR OIL SAE 85W90 (--- QTS)

RECOMMENDATION

No corrective action is recommended at this time. The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0211199	---	---
Sample Date		Client Info		09 Apr 2024	---	---
Machine Age	hrs	Client Info		4377	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ABNORMAL	---	---

WEAR

Gear wear is indicated. All other component wear rates are normal.

PQ		ASTM D8184		147	---	---
Iron	ppm	ASTM D5185m	>500	▲ 1411	---	---
Chromium	ppm	ASTM D5185m	>10	9	---	---
Nickel	ppm	ASTM D5185m	>10	2	---	---
Titanium	ppm	ASTM D5185m		1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	2	---	---
Lead	ppm	ASTM D5185m	>25	2	---	---
Copper	ppm	ASTM D5185m	>100	4	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	19	---	---
Potassium	ppm	ASTM D5185m	>20	4	---	---
Water		WC Method	>.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		4	---	---
Boron	ppm	ASTM D5185m	400	170	---	---
Barium	ppm	ASTM D5185m	200	1	---	---
Molybdenum	ppm	ASTM D5185m	12	2	---	---
Manganese	ppm	ASTM D5185m		20	---	---
Magnesium	ppm	ASTM D5185m	12	4	---	---
Calcium	ppm	ASTM D5185m	150	78	---	---
Phosphorus	ppm	ASTM D5185m	1650	1112	---	---
Zinc	ppm	ASTM D5185m	125	95	---	---
Sulfur	ppm	ASTM D5185m	22500	22017	---	---
Visc @ 40°C	cSt	ASTM D445	180	138	---	---

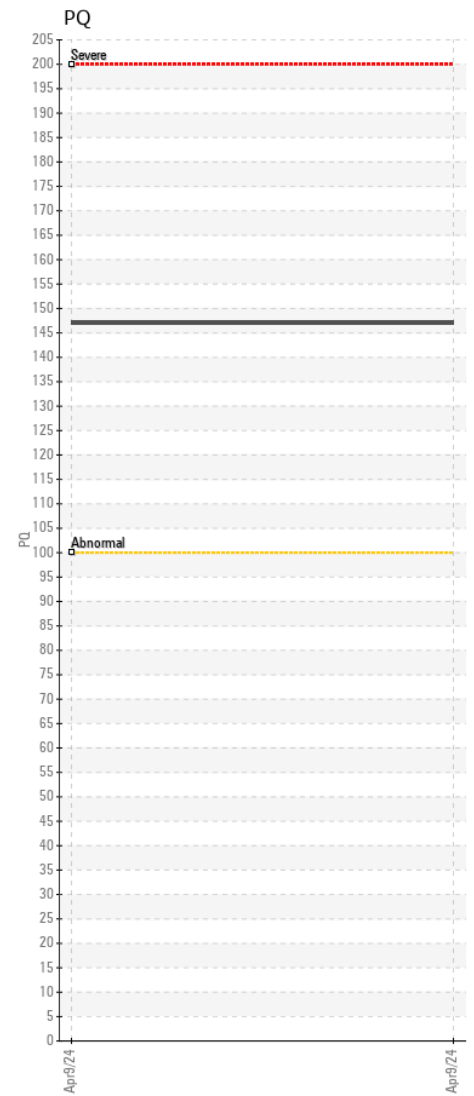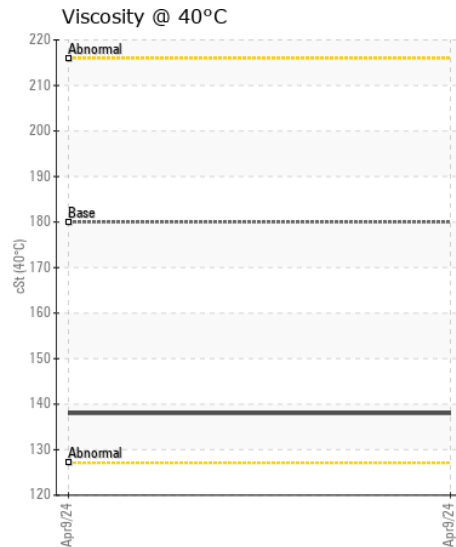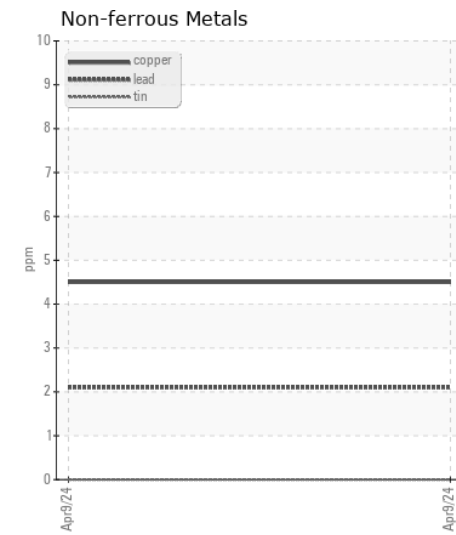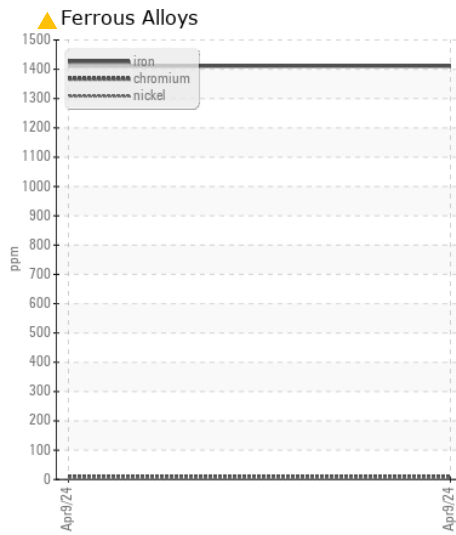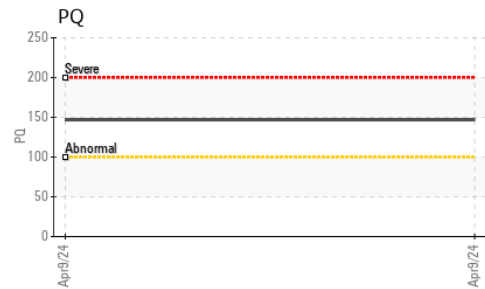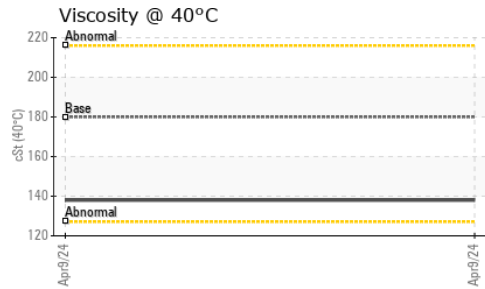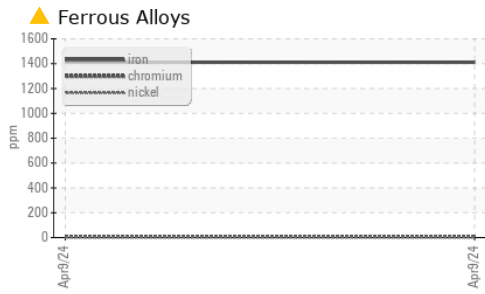

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0211199 **Received** : 11 Apr 2024
Lab Number : **06146134** **Tested** : 12 Apr 2024
Unique Number : 10976212 **Diagnosed** : 15 Apr 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

B & S SITE DEVLOPMENT
 7800 PINEY BRANCH LANE
 BRISTOW, VA
 US 20136

Contact: DANNY HUFF
 dhuff@bandssite.com
 T: (540)270-3203
 F: (703)753-0605

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)