



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[W50942]
Machine Id
JOHN DEERE 824K 1DW824KXPDE655823
Component
Front Differential
Fluid
JOHN DEERE HY-GARD HYD/TRANS (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0199544	JR0180229	JR0165020
Sample Date		Client Info		05 Apr 2024	25 Oct 2023	26 Jun 2023
Machine Age	hrs	Client Info		15291	14389	13538
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Not Chngd	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184		40	28	36
Iron	ppm	ASTM D5185m	>1501	143	138	188
Chromium	ppm	ASTM D5185m	>11	1	<1	<1
Nickel	ppm	ASTM D5185m	>10	1	1	<1
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>21	1	2	0
Lead	ppm	ASTM D5185m	>51	24	17	26
Copper	ppm	ASTM D5185m	>101	33	9	23
Tin	ppm	ASTM D5185m	>10	2	<1	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>31	13	14	12
Potassium	ppm	ASTM D5185m	>20	2	0	2
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	0	0	0
Boron	ppm	ASTM D5185m	6	15	<1	15
Barium	ppm	ASTM D5185m	0	<1	0	0
Molybdenum	ppm	ASTM D5185m	0	5	6	2
Manganese	ppm	ASTM D5185m		2	1	2
Magnesium	ppm	ASTM D5185m	145	104	143	94
Calcium	ppm	ASTM D5185m	3570	3344	3144	3607
Phosphorus	ppm	ASTM D5185m	1290	1114	1025	1086
Zinc	ppm	ASTM D5185m	1640	1145	1129	1232
Sulfur	ppm	ASTM D5185m		5026	3863	4592
Visc @ 40°C	cSt	ASTM D445	57.0	53.3	55.9	52.3

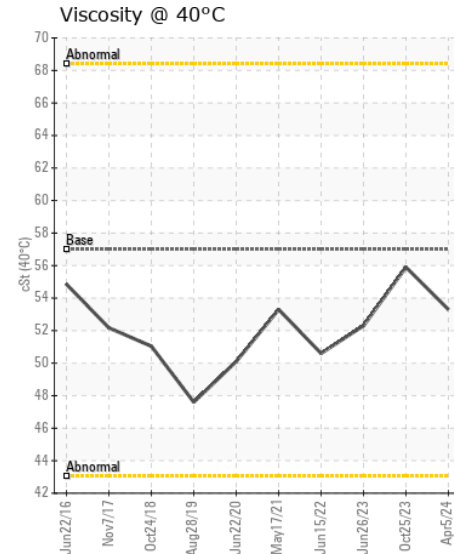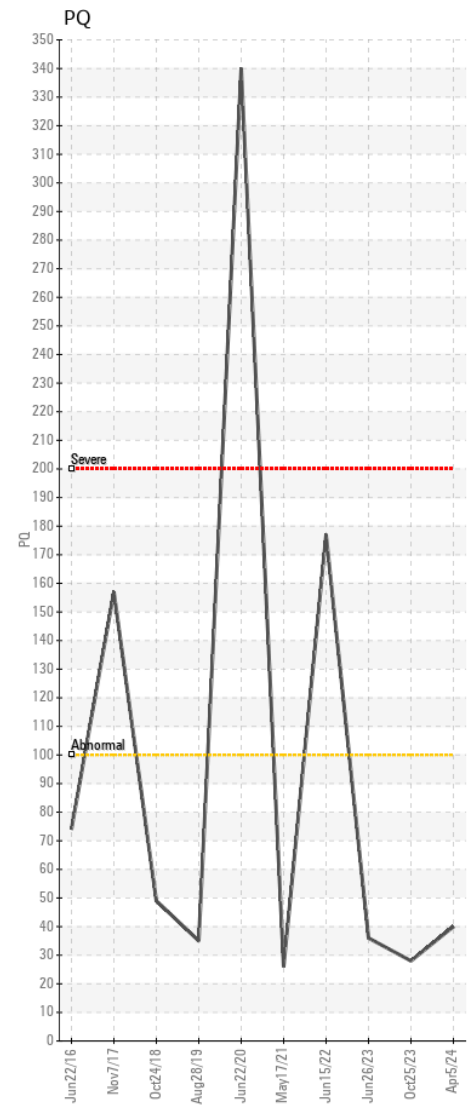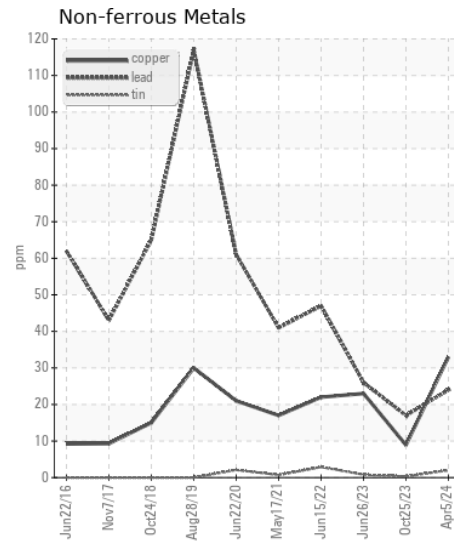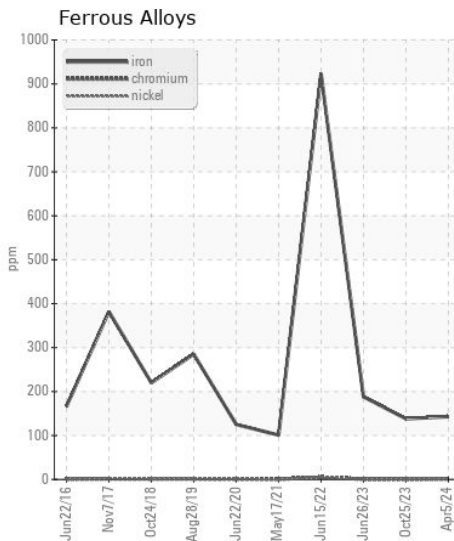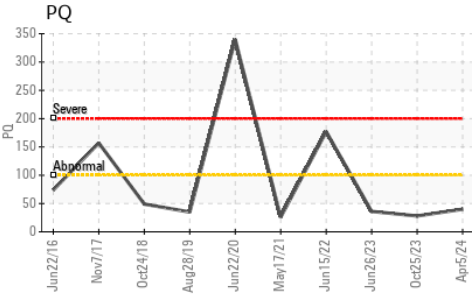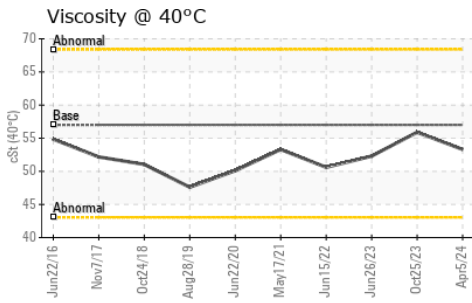

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0199544 **Received** : 11 Apr 2024
Lab Number : 06146136 **Tested** : 12 Apr 2024
Unique Number : 10976214 **Diagnosed** : 12 Apr 2024 - Wes Davis
Test Package : CONST (Additional Tests: PQ)

JRE - ASHLAND
 11047 LEADBETTER RD
 ASHLAND, VA
 US 23005
 Contact: DAVID ZIEG
 dzieg@jamesriverequipment.com
 T: (804)798-6001
 F: (804)798-0292

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)