



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
TPR-Houston Port
Machine Id
5672 VOLVO L180H 5672
Component
Front Right Final Drive
Fluid
CHEVRON 1000 THF (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		DJJ0010374	DJJ0023541	---
Sample Date		Client Info		05 Apr 2024	13 Feb 2024	---
Machine Age	hrs	Client Info		3559	2946	---
Oil Age	hrs	Client Info		500	0	---
Filter Age	hrs	Client Info		500	0	---
Oil Changed		Client Info		Not Changed	Changed	---
Filter Changed		Client Info		Not Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>1000	23	39	---
Chromium	ppm	ASTM D5185m	>10	<1	<1	---
Nickel	ppm	ASTM D5185m	>10	0	0	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>10	0	2	---
Lead	ppm	ASTM D5185m	>25	0	0	---
Copper	ppm	ASTM D5185m	>30	0	1	---
Tin	ppm	ASTM D5185m	>10	0	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>30	5	6	---
Potassium	ppm	ASTM D5185m	>20	0	2	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<1	0	---
Boron	ppm	ASTM D5185m	10	14	22	---
Barium	ppm	ASTM D5185m		0	10	---
Molybdenum	ppm	ASTM D5185m		4	6	---
Manganese	ppm	ASTM D5185m		<1	2	---
Magnesium	ppm	ASTM D5185m	20	27	26	---
Calcium	ppm	ASTM D5185m	3200	2700	2710	---
Phosphorus	ppm	ASTM D5185m	1100	1005	1068	---
Zinc	ppm	ASTM D5185m	1400	1160	1255	---
Sulfur	ppm	ASTM D5185m	3600	4099	4247	---
Visc @ 40°C	cSt	ASTM D445	58.4	52.7	51.4	---

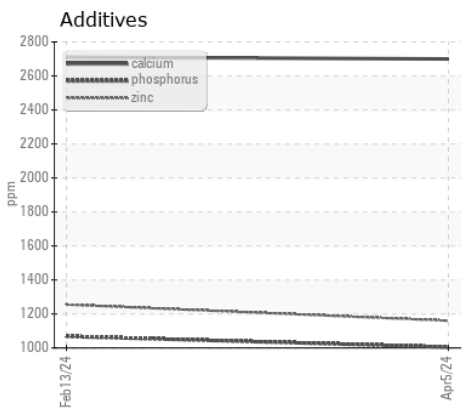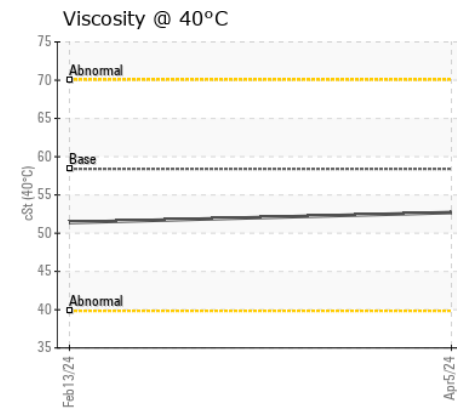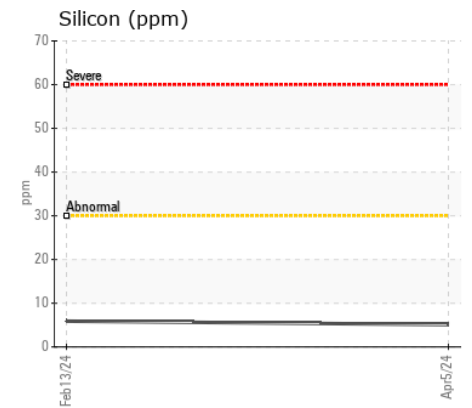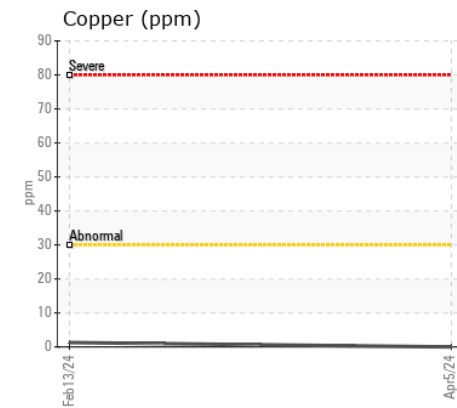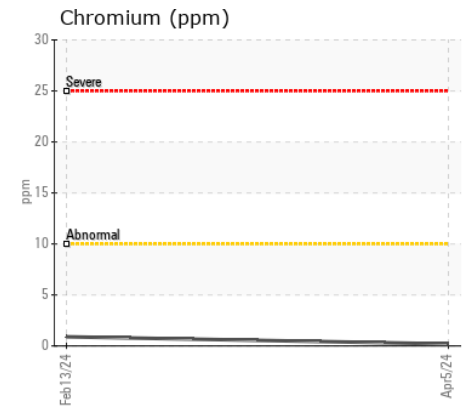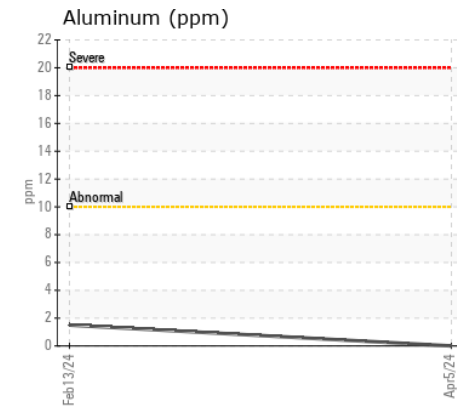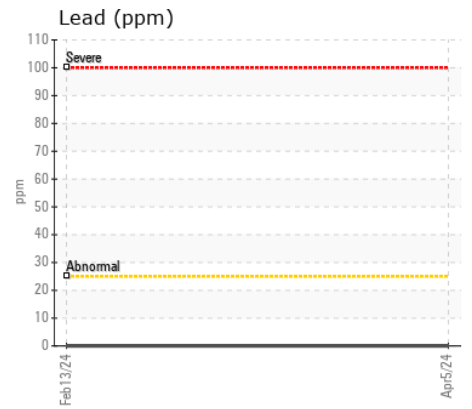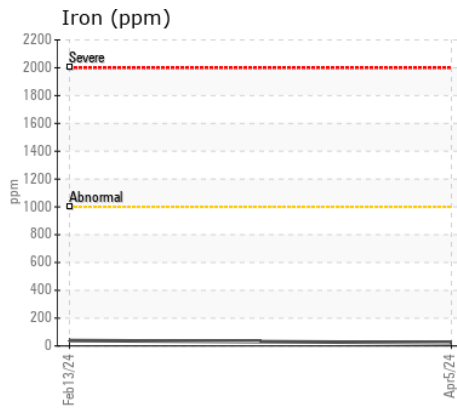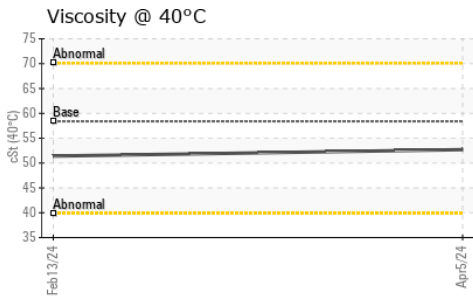

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : DJJ0010374
Lab Number : 06146193
Unique Number : 10976271
Test Package : MOBCE

Received : 11 Apr 2024
Tested : 12 Apr 2024
Diagnosed : 12 Apr 2024 - Wes Davis

TEXAS PORT RECYCLING - HOUSTON PORT
 8945 MANCHESTER ST
 HOUSTON, TX
 US 77012
 Contact: ROBERT BARKER
 robert.barker@texasportrecycling.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (713)921-5545