



ASCENDUM

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

Ascendum Machinery

Machine Id

SENNEBOGEN 821E RTH6 (S/N 82102749)

Component

Front Left Travel

Fluid

VOLVO SUPER GEAR OIL 75W-80-GO102 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0007109	VCP0006681	---
Sample Date		Client Info		09 Apr 2024	11 Apr 2023	---
Machine Age	hrs	Client Info		1939	1939	---
Oil Age	hrs	Client Info		1939	1939	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Not Chngd	Changed	---
Filter Changed		Client Info		None	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	4	18	---
Chromium	ppm	ASTM D5185m	>20	0	<1	---
Nickel	ppm	ASTM D5185m	>5	0	<1	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>100	0	<1	---
Lead	ppm	ASTM D5185m	>10	0	<1	---
Copper	ppm	ASTM D5185m	>60	6	26	---
Tin	ppm	ASTM D5185m	>5	0	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>150	1	8	---
Potassium	ppm	ASTM D5185m	>20	0	2	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		4	19	---
Boron	ppm	ASTM D5185m		195	117	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		<1	<1	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m		5	9	---
Calcium	ppm	ASTM D5185m		427	3651	---
Phosphorus	ppm	ASTM D5185m		2019	1191	---
Zinc	ppm	ASTM D5185m		346	1467	---
Sulfur	ppm	ASTM D5185m		24021	3363	---
Visc @ 40°C	cSt	ASTM D445		51.8	54.3	---

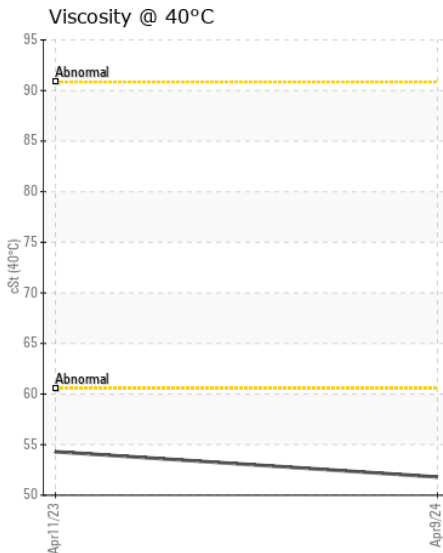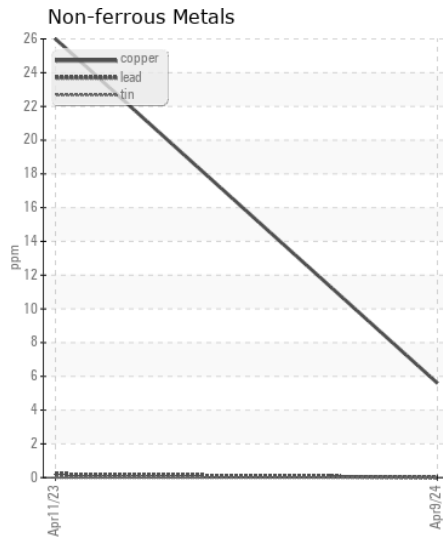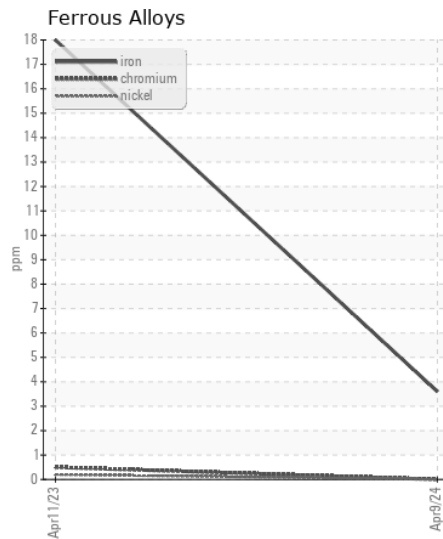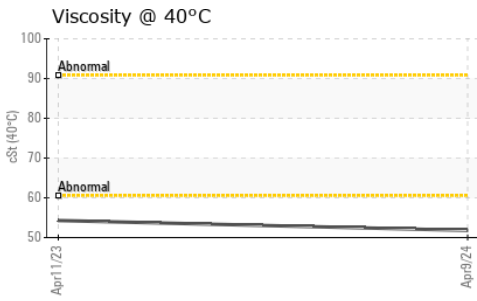

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0007109
Lab Number : 06146200
Unique Number : 10976278
Test Package : CONST

Received : 11 Apr 2024
Tested : 12 Apr 2024
Diagnosed : 12 Apr 2024 - Wes Davis

HILCO TRANSPORT
 7700 KENMONT RD
 GREENSBORO, NC
 US 27409

Contact: MIKE LAUGHEAD
 mlaughead@hilcotransport.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (336)273-9441
 F: (336)273-9701